





**VINADALI VIETNAM
COMPANY LIMITED**

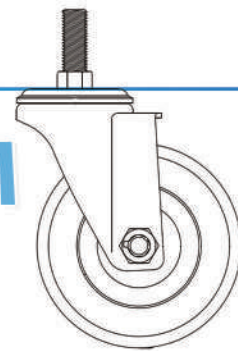

HIGH-QUALITY CASTER WHEELS MANUFACTURER

**15 YEAR'S EXPERIENCE
OEM/ODM**



**VINADALI VIET NAM
COMPANY LIMITED**

+84 889.619.418



Info@vinadali.com

59/22C, Tien Lan 12, Ba Diem Commune, Hoc Mon District, Ho Chi Minh City, Viet Nam

INTRODUCE

You are looking for a reliable supplier who can manufacture and supply the caster wheels & trolley with high-quality and competitive prices in factory.

=> Choose **VINADALI VIETNAM** - Our slogan is

"YOUR TRUST IS OUR STRENGTH" - We always aim for the best caster wheels to provide to customers worldwide.

VINADALI is the top supplier and manufacturer of caster wheels & trolleys from Viet Nam. Our main factory is in Zhongshan city, Guangdong province, China, experiencing more than 15 years of researching and manufacturing caster wheels. With modern automatic machine, we can manufacture the big quantity & meet the delivery time correctly.





HIGH-QUALITY CASTER WHEELS MANUFACTURER

✓ **DIRECT FACTORY WITH COMPETITIVE PRICES**

✓ **PROFESSIONAL R&D TEAM**

OUR FACTORY

- Established: 2007
 - Factory site: 2500 m2
 - Quantity of machines: 50 main machines
 - Workers: 200 people
 - Consultant: 50 employees
 - Production capacity: 500,000 pcs/ month
 - Main products: Casters & Trolleys
 - Our customers in Vietnam Market : Foxconn, LG, Samsung, Vinfast, Bach Mai Hospital, Usabaco, Sumin,...
 - We also have customer over the world: US, UK, Australia, Europe, Asia,....
- All products are thoroughly checked to meet technical metrological standards, CO - CQ quality inspection certificates.

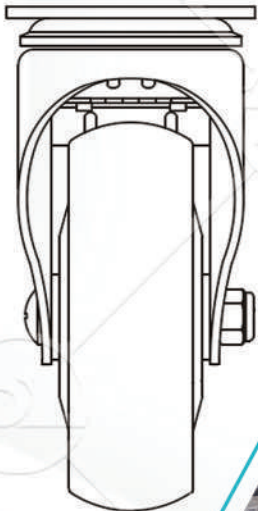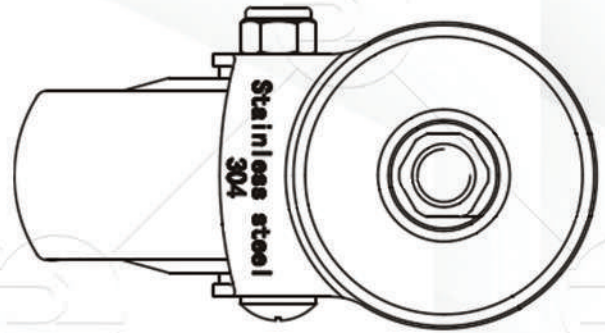



OEM/ODM SERVICE

We have trolley and casters available in stock, accept large orders and production orders according to customer's quality standard designs.

With the trolleys and casters manufactured according to the customer's request, we also have a strict production process, ensuring the best quality.

The process of manufacturing casters according to customer requirements:

- ✓ Calculate the load capacity of casters,
- ✓ Decide the material of the wheel or caster,
- ✓ Decide caster diameter,
- ✓ Decide the mounting types of the caster,...
- ✓ Based on all above, we have can offer you the most suitable caster solution or design a new mould for your equipment.

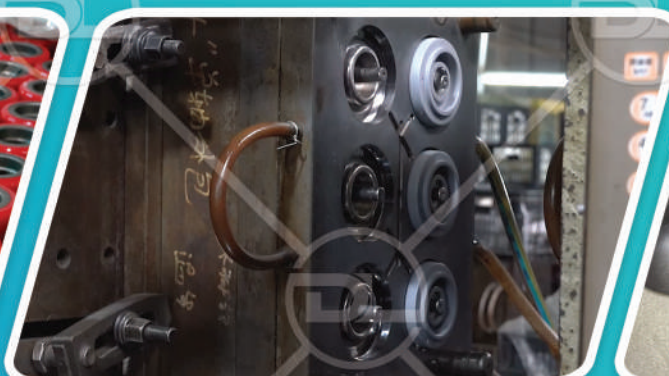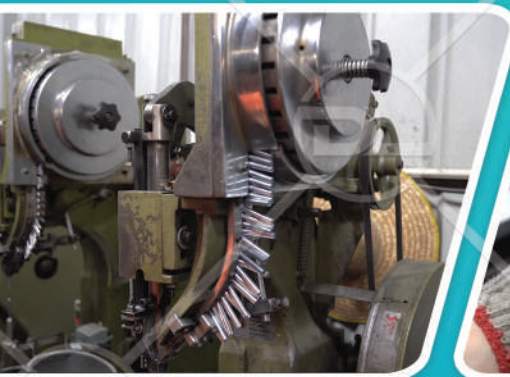


ABOUT PRECAUTIONS FOR USING CASTERS



**Do not
over load**



**Do not stand
on the trolley
with caster**




**Do not push
the caster
with brake on**




**Use screw wrench
to tighten
up the caster**




**Do not hammer
the brake or
step on it hardy**




**Avoid
uneven ground**



**Do not use
in high temperature,
low temperature,
high humidity,...**



**Do not push
the fixed caster
vertically to the
rolling direction**




**Avoid
unbalanced load**




**Avoid dropping
or impact**

CASTERS KNOWLEDGE




Swivel Caster



It has the best flexibility, can turn as desired and is stable but very prone to veering off course when going straight.




Rigid Caster



It has good flexibility, stability and excellent straightness.


CALCULATION FOR LOADING CAPACITY

Formula

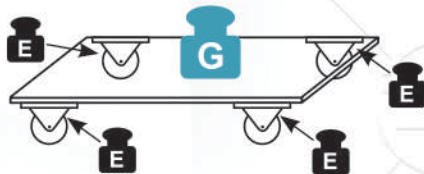

$$G = 3 \times E$$

Example

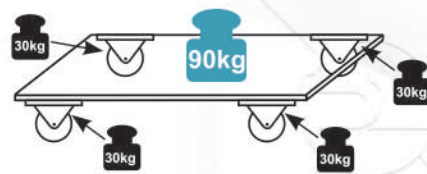


$$E = 30 \text{ kg}$$

$$G = 3 \times 30 \text{ kg}$$


$$G = 90 \text{ kg}$$

CASTER INSTALLATION TIPS

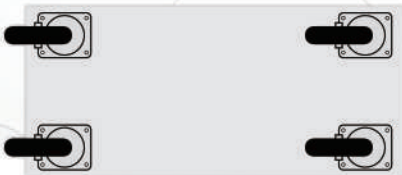


4 FLEXIBLE SWIVEL CASTERS

A versatile design structure with high maneuverability, allowing flexible turning in one direction but not suitable for long straight-line movement.

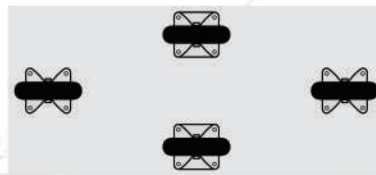

4 FIXED CASTERS

The two middle wheels are raised by 1/8Inch compared to the front and rear wheels. They feature a cost-effective design but are not suitable for use on slopes or under heavy loads.

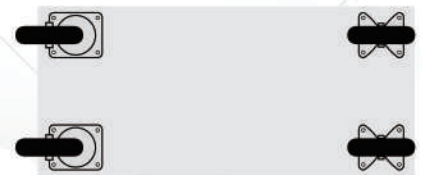

2 FIXED CASTERS + 2 SWIVEL CASTERS

With a versatile design, the cart can swivel flexibly while also being able to move straight in a specific direction.




4 SWIVEL CASTERS + 2 FIXED CASTERS

Recommended for use with heavy-duty vehicles, long distances, or lengthy equipment. The two fixed wheels help distribute the weight of the moving wheels, making the cart easier to turn and highly flexible.



2 SWIVEL CASTERS + 2 FIXED CASTERS

It can perform rotational movement with its own length as the diameter.

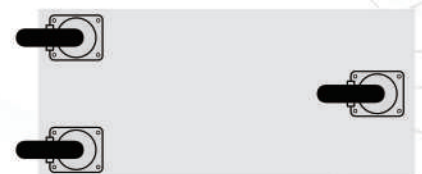

3 SWIVEL CASTERS

Suitable for carts and small equipment easy to turn and capable of operating in all directions.

Installation Tips: Below are some common layouts for installing wheels on carts, trolleys, and other mobile equipment. Each method has its own advantages.



CONTENTS



P01-P03

INTRODUCE



P04-P05

QUICK USE GUIDE



P08-P32

PRODUCTS

STAINLESS STEEL CASSTERWHEELS

Light duty

Medium duty

Small size - heavy duty

Medium duty - VINADALI brand

Medium duty-Electrostatic/Anti-static

Height-adjustable

Heavy duty

Heavy duty - Shock-Absorbing

MEDICAL CASTERS

STAINLESS STEEL CASTERWHEELS

Light duty

Medium duty

Heavy duty

Frame of stainless steel 304,316

SMART TROLLEY



25 - 70

P08

80 - 130

P09 - P10

100 - 600

P11

80 - 130

P12

80 - 130

P13

50 - 1500

P14

250 - 400

P15 - P17

80 - 400

P18

120 - 150

P20

P23 - P30

25 - 50

P23 - P24

80 - 110

P25 - P26

250 - 400

P27 - P29

P30

180 - 380

P31 - P32






LIGHT DUTY

25-70 

Fixed

Swivel

Threaded



(PVC)

PVC casterwheels - Light duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)	 Load capacity (kg)
40mm(1.5")	20	2	59	60x43	44x30	6.3x9.3	M8/M10/M12	20
50mm(2")	23	2	71	68.5x48.5	52x35	8x11	M8/M10/M12	35
63mm(2.5")	32	2	91.5	92x60	74x45	8x11	M8/M10/M12	50
75mm(3")	32	2	105	46x40	74x45	8x11	M8/M10/M12	70

Type of
casterwheels



PVC-75mm



PVC-50mm



PVC-40mm



PVC-63mm



PVC-75mm

TPE casterwheels - Light duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)	 Load capacity (kg)
25mm(1")	13	1	38	38x30	29x21	11x8	M6/M8/M10	13
32mm(1.25")	13	1	43	39x33	30x23	11x8	M6/M8/M10	17
38mm(1.5")	17	1	53	46x40	36x28	11x8	M6/M8/M10	23
50mm(2")	18	1	64	46x40	36x28	11x8	M6/M8/M10	25

MEDIUM DUTY




80-110  **KG**



Fixed

Swivel

Threaded



PP casterwheels - Medium duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
75mm(3")	32	2	105	91.5x60.5	74x45	8.5x12	M12/M16
100mm(4")	32	2	130	91.5x60.5	74x45	8.5x12	M12/M16
125mm(5")	32	2	155	91.5x60.5	74x45	8.5x12	M12/M16

PU iron core casterwheels - Medium duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
75mm(3")	32	2	105	91.5x60.5	74x45	8.5x12	M12/M16
100mm(4")	32	2	130	91.5x60.5	74x45	8.5x12	M12/M16
125mm(5")	32	2	155	91.5x60.5	74x45	8.5x12	M12/M16

Type of casterwheels



TPU



TPU



PVC



PA



PP




NYLON

MEDIUM DUTY


80-110 




Fixed



Swivel

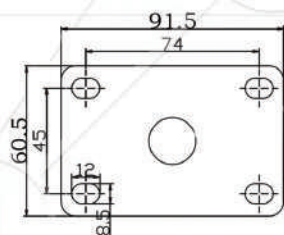

Threaded



TPR casterwheels - Medium duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
75mm(3")	32	2	105	91.5x60.5	74x45	8.5x12	M12/M16
100mm(4")	32	2	130	91.5x60.5	74x45	8.5x12	M12/M16
125mm(5")	32	2	155	91.5x60.5	74x45	8.5x12	M12/M16

TPR casterwheels - Medium duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
75mm(3")	32	2	105	91.5x60.5	74x45	8.5x12	M12/M16
100mm(4")	32	2	130	91.5x60.5	74x45	8.5x12	M12/M16
125mm(5")	32	2	155	91.5x60.5	74x45	8.5x12	M12/M16

Type of
casterwheels



TPR
(no bearing)



TPR
(Double ball bearing)



TPR
(Double ball bearing)

SMALL SIZE - HEAVY DUTY CASTERWHEELS

100-600 



NYLON castorwheels **100-220** 



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
50/2"	32	0/2	71	100	72x54	55x39	7x8.5
63/2.5"	39	2	90	150	95x68	72x44	8.5x11
75/3"	44.5	2	105	220	105x80	83x60	8.5x11

NYLON castorwheels **600** 




 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
75/3"	50	2	105	600	100x100	75x75	11x16

MEDIUM DUTY CASTERWHEELS


VINADALI BRAND 80-130  **KG**




Fixed



Swivel

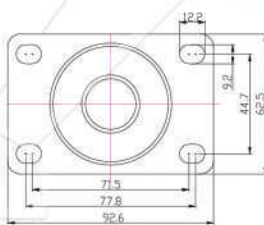

Threaded



PU casterwheels - Medium duty - VINADALI Brand



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
75mm(3")	32	1	106	92.6x62.5	74.6x44.7	9.2x12.2	M12/M16
100mm(4")	32	1	131	92.6x62.5	74.6x44.7	9.2x12.2	M12/M16
125mm(5")	32	1	157	92.6x62.5	74.6x44.7	9.2x12.2	M12/M16

PU casterwheels - Medium duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
75mm(3")	32	2	105	91.5x60.5	74x45	8.5x12	M12/M16
100mm(4")	32	2	130	91.5x60.5	74x45	8.5x12	M12/M16
125mm(5")	32	2	155	91.5x60.5	74x45	8.5x12	M12/M16

Type of
casterwheels



PU



PU



PU



TPR



TPR




TPR

ELECTROSTATIC/ANTISTATIC


CASTERWHEELS 80-130 KG




Fixed



Swivel

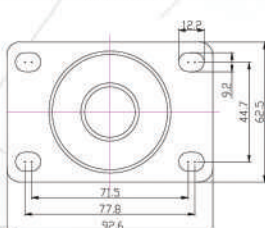

Threaded



Electrostatic/Anti-static TPR Casterwheels - VINADALI Brand



Wheel Dia (mm)	Tread Width (mm)	Bearing (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Thread Size (mm)
75mm(3")	32	1	106	92.6x62.5	74.6x44.7	9.2x12.2	M12/M16
100mm(4")	32	1	131	92.6x62.5	74.6x44.7	9.2x12.2	M12/M16
125mm(5")	32	1	157	92.6x62.5	74.6x44.7	9.2x12.2	M12/M16

PU casterwheels - Medium duty





Wheel Dia (mm)	Tread Width (mm)	Bearing (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Thread Size (mm)
75mm(3")	32	1	105	93x61	74x45	8.5x12	M12/M16
100mm(4")	32	1	130	93x61	74x45	8.5x12	M12/M16
125mm(5")	32	1	155	93x61	74x45	8.5x12	M12/M16

✓ **ELECTROSTATIC: 10³ OHM**

✓ **ANTI-STATIC: 10⁶ - 10⁹ OHM**

HEIGHT-ADJUSTABLE CASTERWHEEL 50-1500 KG



Leveling Caster



MODEL	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Thread Size (mm)
40F/40S	42	20	50	71+10	51	55x55	42x42	6.5	M8X10
60F/60S	50	25	250	82+10	63	73x73	58x58	7	M12X15
80F/80S	63	28	500	102+15	77	92x92	70x70	9	M12X15
100F/100S	75	30	750	120+12	90	92x92	70x70	9	M16X20
120F/120S	75	30	1000	120+12	89	95x95	70x70	11	M16X20
150F	90	55	1500	132+15	171	100x100	70x70	13	---

Caster Wheel with Height-Adjustable Leg



Wheel Dia (mm)	Tread Width (mm)	Bearing (mm)	Load Height (mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)	Thread Size (mm)
75mm(3")	32	0/1/2	105	94x63	74x45	10x12	M12/M16
100mm(4")	32	0/1/2	130	94x63	74x45	10x12	M12/M16
125mm(5")	32	0/1/2	155	94x63	74x45	10x12	M12/M16


Floor Locks



MODEL	(mm)	(mm)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)
100	125	155	120x120	100x100 85x85	11
125	153	183	120x120	100x100 85x85	11
150	168	211	120x120	100x100 85x85	11
200	212	255	120x120	100x100 85x85	11

HEAVY DUTY

250-400 



PU Iron core Casterwheels - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	300	115x100	84x71.5	20x11
150/6"	50	2	191	350	115x100	84x71.5	20x11
200/8"	50	2	241	400	115x100	84x71.5	20x11

PU Casterwheels - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	280	115x100	84x71.5	20x11
150/6"	50	2	191	300	115x100	84x71.5	20x11
200/8"	50	2	241	350	115x100	84x71.5	20x11


Scaffolding Casterwheels



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Thread Height (mm)	 Thread Dia (mm)
150/6"	50	1	190	100	35
200/8"	50	1	240	100	35

HEAVY DUTY

250-400 KG



RED PU Casterwheels - Iron core - Rounded Edge



Wheel Dia
(mm)



Tread Width
(mm)



Bearing
(mm)



Load Height
(mm)



Load capacity
(kg)



Plate Size
(mm)



Plate Size
(mm)



Hole Size
(mm)

100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	300	115x100	84x71.5	20x11
150/6"	50	2	191	350	115x100	84x71.5	20x11
200/8"	50	2	241	400	115x100	84x71.5	20x11

BLUE PU Casterwheels - Iron core - Rounded Edge



Wheel Dia
(mm)



Tread Width
(mm)



Bearing
(mm)



Load Height
(mm)



Load capacity
(kg)



Plate Size
(mm)



Plate Size
(mm)




Hole Size
(mm)

100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	300	115x100	84x71.5	20x11
150/6"	50	2	191	350	115x100	84x71.5	20x11
200/8"	50	2	241	400	115x100	84x71.5	20x11

HEAVY DUTY

250-400  **KG**



PP Casterwheel - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
100/4"	50	0	144	250	115x100	84x71.5	20x11
125/5"	50	0	165	300	115x100	84x71.5	20x11
150/6"	50	0	191	350	115x100	84x71.5	20x11
200/8"	50	0	241	400	115x100	84x71.5	20x11

NYLON Casterwheel - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	300	115x100	84x71.5	20x11
150/6"	50	2	191	350	115x100	84x71.5	20x11
200/8"	50	2	241	400	115x100	84x71.5	20x11

Type of
casterwheels



NYLON



TPR



PU



PU




PP



PA

SHOCK-ABSORBING CASTERWHEELS 80-400 KG

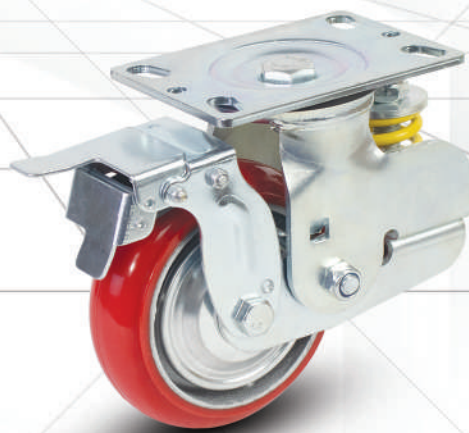

 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Swivel Radius (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
75/3"	32	1	113.5	152.5	95x70	75x52	11x8	---
100/4"	32	1	138	165.5	95x70	75x52	11x8	---
125/5"	32	1	165.3	175	95x70	75x52	11x8	---




 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Swivel Radius (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
125/5"	50	2	192/210	58/65	140x110	105x78	13x25
150/6"	50	2	204/222	58/65	140x110	105x78	13x25
200/8"	50	2	248/268	68/78	140x110	105x78	13x25




 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Swivel Radius (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
125/5"	50	2	187	58/65	157x115	130x73	13x25
150/6"	50	2	200	58/65	157x115	130x73	13x25
200/8"	50	2	252	68/78	157x115	130x73	13x25

CUSTOM - DESIGNED CASTERWHEELS

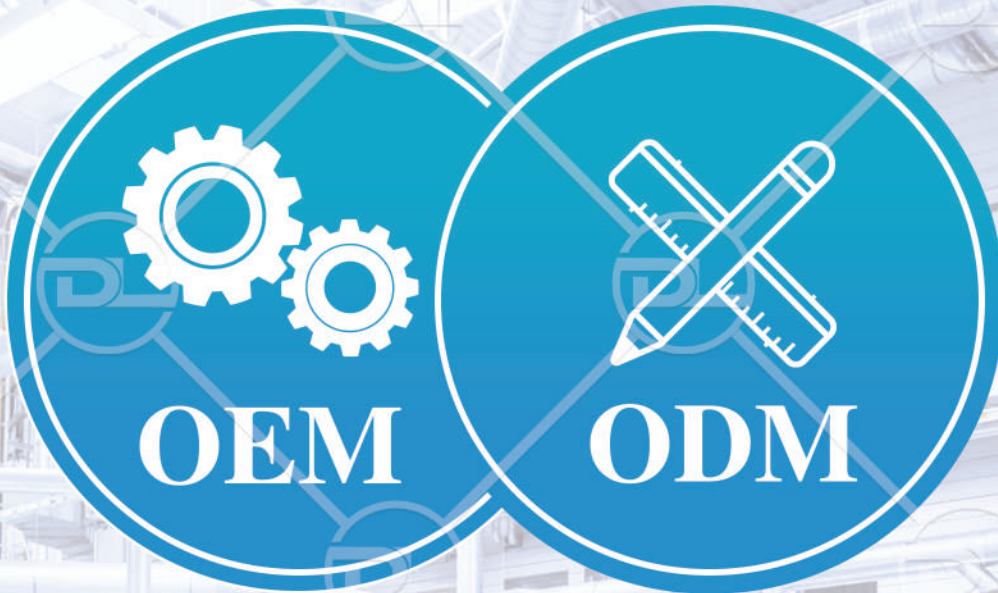

MEDICAL CASTERS

120-150  KG

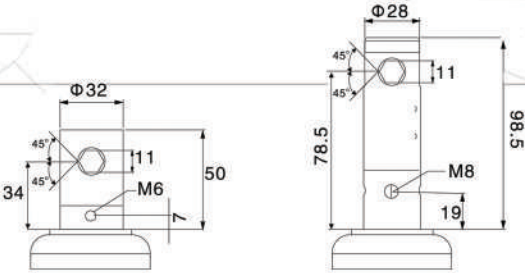

Medical Caster central brake - dual wheels



 Wheel Dia (mm)	 Tread Width (mm)	 Central Locking (mm)	 Thread Height (mm)	 Thread Height (mm)
125/5"	67	O28x96	160	120
150/6"	---	O28x96	---	150

Medical Caster central brake - single wheel



 Wheel Dia (mm)	 Tread Width (mm)	 Central Locking (mm)	 Thread Height (mm)	 Thread Height (mm)
125/5"	67	O28x96	160	120
150/6"	---	O28x96	---	150





MEDICAL CASTERWHEELS



STAINLESS STEEL 304 - 316 CASTERWHEELS



LIGHT DUTY



MEDIUM DUTY



HEAVY DUTY

LIGHT DUTY

25-50  **KG**

INOX 304 316




Fixed

Swivel

Threaded



(PA)



PA stainless steel casterwheels - Light duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)	 Load capacity (kg)
50mm(2")	28	0	72	70x51	53x35	8x11	M8/M10/M12	35
63mm(2.5")	28	0	92	95x66	75x45	8x11	M8/M10/M12	50

PP stainless steel casterwheels - Light duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)	 Load capacity (kg)
50mm(2")	28	0	72	70x51	53x35	8x11	M8/M10/M12	35
63mm(2.5")	28	0	92	95x66	75x45	8x11	M8/M10/M12	50

**Type of
casterwheels**

PP
(no bearing)

PA
(no bearing)

LIGHT DUTY

30-45 

INOX 304 316




Fixed

Swivel

Threaded



(TPR)



PA stainless steel casterwheels - Light duty



Wheel Dia
(mm)



Tread Width
(mm)



Bearing
(mm)



Load Height
(mm)



Plate Size
(mm)



Plate Size
(mm)



Hole Size
(mm)



Thread Size
(mm)



Load capacity
(kg)



50mm(2")	26	1	72	70x51	53x35	8x11	M8/M10/M12	30
63mm(2.5")	26	1	92	95x66	75x45	8x11	M8/M10/M12	45



MEDIUM DUTY

80-130  KG

INOX 304 316

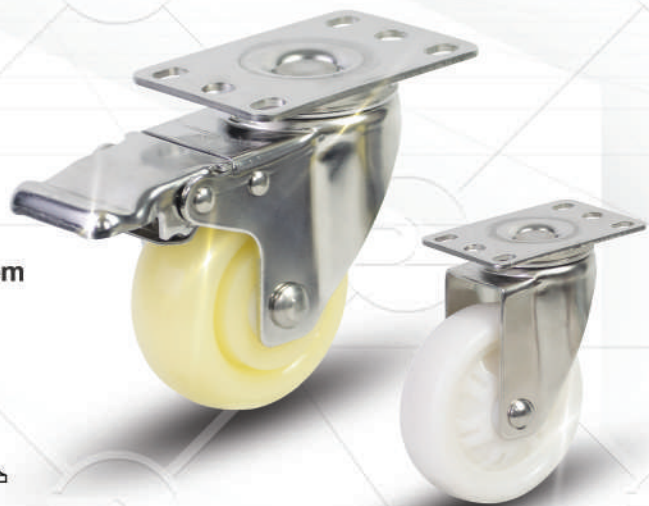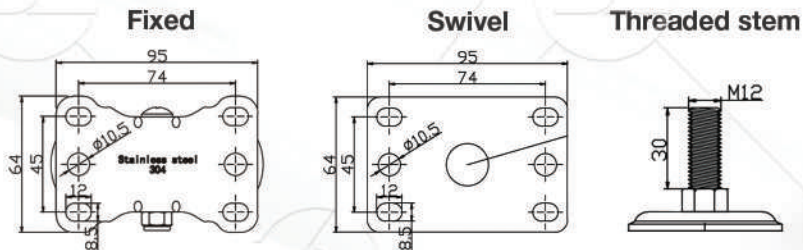

PA stainless steel casterwheels - Medium duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
--	--	--	--	---	---	--	--

75mm(3")	32	0	105	95x64	74x45	8x11	M12/M16
100mm(4")	32	0	130	95x64	74x45	8x11	M12/M16
125mm(5")	32	0	155	95x64	74x45	8x11	M12/M16

NYLON stainless steel casterwheels - Medium duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)	 Thread Size (mm)
--	--	--	--	---	---	--	--

75mm(3")	32	0	105	95x64	74x45	8x11	M12/M16
100mm(4")	32	0	130	95x64	74x45	8x11	M12/M16
125mm(5")	32	0	155	95x64	74x45	8x11	M12/M16

Type of
casterwheels



MEDIUM DUTY




80-130  KG

INOX 304 316

Fixed

Swivel

Threaded stem

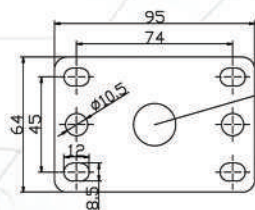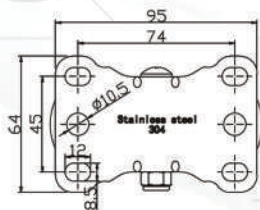

TPR stainless steel casterwheels - Medium duty



Wheel Dia
(mm)



Tread Width
(mm)



Bearing
(mm)



Load Height
(mm)



Plate Size
(mm)



Plate Size
(mm)



Hole Size
(mm)



Thread Size
(mm)

75mm(3")	32	1	105	95x64	74x45	8x11	M12/M16
100mm(4")	32	1	130	95x64	74x45	8x11	M12/M16
125mm(5")	32	1	155	95x64	74x45	8x11	M12/M16

PU stainless steel casterwheels - Medium duty



Wheel Dia
(mm)



Tread Width
(mm)



Bearing
(mm)



Load Height
(mm)



Plate Size
(mm)



Plate Size
(mm)



Hole Size
(mm)



Thread Size
(mm)

75mm(3")	32	1	105	95x64	74x45	8x11	M12/M16
100mm(4")	32	1	130	95x64	74x45	8x11	M12/M16
125mm(5")	32	1	155	95x64	74x45	8x11	M12/M16

Type of
casterwheels



TPR



TPR



TPR



TPR



PU




PU

(Electrostatic / Anti-static)

HEAVY DUTY

250-400 KG



PA stainless steel casterwheels - Heavy duty



Wheel Dia (mm)	Tread Width (mm)	Bearing (mm)	Load Height (mm)	Load capacity (kg)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)
100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	300	115x100	84x71.5	20x11
150/6"	50	2	191	350	115x100	84x71.5	20x11
200/8"	50	2	241	400	115x100	84x71.5	20x11



PP stainless steel casterwheels - Heavy duty



Wheel Dia (mm)	Tread Width (mm)	Bearing (mm)	Load Height (mm)	Load capacity (kg)	Plate Size (mm)	Plate Size (mm)	Hole Size (mm)
100/4"	50	0	144	250	115x100	84x71.5	20x11
125/5"	50	0	165	300	115x100	84x71.5	20x11
150/6"	50	0	191	350	115x100	84x71.5	20x11
200/8"	50	0	241	400	115x100	84x71.5	20x11

HEAVY DUTY

250-400 

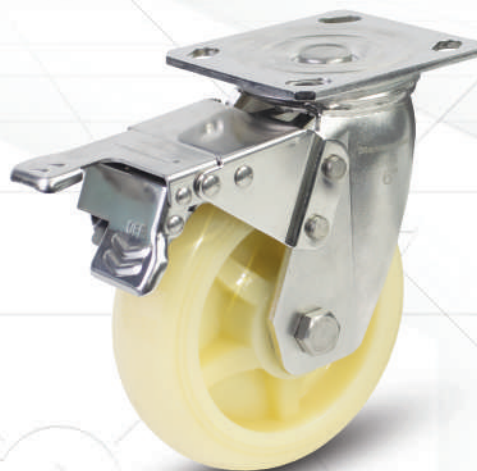

NYLON stainless steel casterwheels - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	300	115x100	84x71.5	20x11
150/6"	50	2	191	350	115x100	84x71.5	20x11
200/8"	50	2	241	400	115x100	84x71.5	20x11


PP stainless steel casterwheels - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
100/4"	50	0	144	250	115x100	84x71.5	20x11
125/5"	50	0	165	300	115x100	84x71.5	20x11
150/6"	50	0	191	350	115x100	84x71.5	20x11
200/8"	50	0	241	400	115x100	84x71.5	20x11

HEAVY DUTY

250-400 



NYLON stainless steel casterwheels - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
---	---	---	---	---	--	--	---

100/4"	50	2	144	250	115x100	84x71.5	20x11
125/5"	50	2	165	300	115x100	84x71.5	20x11
150/6"	50	2	191	350	115x100	84x71.5	20x11
200/8"	50	2	241	400	115x100	84x71.5	20x11

TPR stainless steel casterwheels - Heavy duty



 Wheel Dia (mm)	 Tread Width (mm)	 Bearing (mm)	 Load Height (mm)	 Load capacity (kg)	 Plate Size (mm)	 Plate Size (mm)	 Hole Size (mm)
--	--	--	--	--	---	---	--

100/4"	50	2	144	150	115x100	84x71.5	20x11
125/5"	50	2	165	180	115x100	84x71.5	20x11
150/6"	50	2	191	260	115x100	84x71.5	20x11
200/8"	50	2	241	280	115x100	84x71.5	20x11

CASTERWHEELS FRAME OF STAINLESS STEEL 304,316

MEDIUM DUTY

• Fixed

• Swivel

• Brake

• Threaded Stem Swivel

• Threaded Stem Brake

 3 Inch	 3 Inch	 3 Inch	 3 Inch	 3 Inch
 4 Inch	 4 Inch	 4 Inch	 4 Inch	 4 Inch
 5 Inch	 5 Inch	 5 Inch	 5 Inch	 5 Inch

HEAVY DUTY

• 4 Inch

• 5 Inch

• 6 Inch

• 8 Inch

 Fixed	 Fixed	 Fixed	 Fixed
 Swivel	 Swivel	 Swivel	 Swivel
 Brake	 Brake	 Brake	 Brake

SMART TROLLEY WITH AMERICAN STANDARDS



SMART TROLLEY WITH AMERICAN STANDARDS

Labor-saving/ Quiet operation
Innovative and intelligently
designed handle

Outstanding Technical Specifications

High-Quality Push Button: Durable PP material with long-lasting wear resistance.

Sturdy Handle: 2mm thick, rust-resistant with electrostatic coating for a secure grip.

TPR CasterWheels: Quiet, floor-safe movement.

Flexible Wheels: 2 fixed and 2 swivel wheels (360°) for easy navigation.

Exceptional Advantages

Smooth Movement: Quiet, flexible, and collision-resistant.

Smart Button: Easy to use, reduces effort, boosts efficiency.

Versatile Applications

This product is suitable for a wide range of work environments:

Hotels, Restaurants: Transporting food and tools.

Logistics & Transportation: Efficient goods handling.

Factories: Safe material transport.




Model No	Product Size (mm)	Product Size (mm)	Handle Height (mm)	Wheel Dia (mm)	Load capacity (kg)	Weight (kg)
HOD-180	720X480	175	820	100	180	10.7
HOD-380	900X600	200	910	125	380	15.9

SHOWROOM & EVENTS



VINADALI AROUND THE WORLD



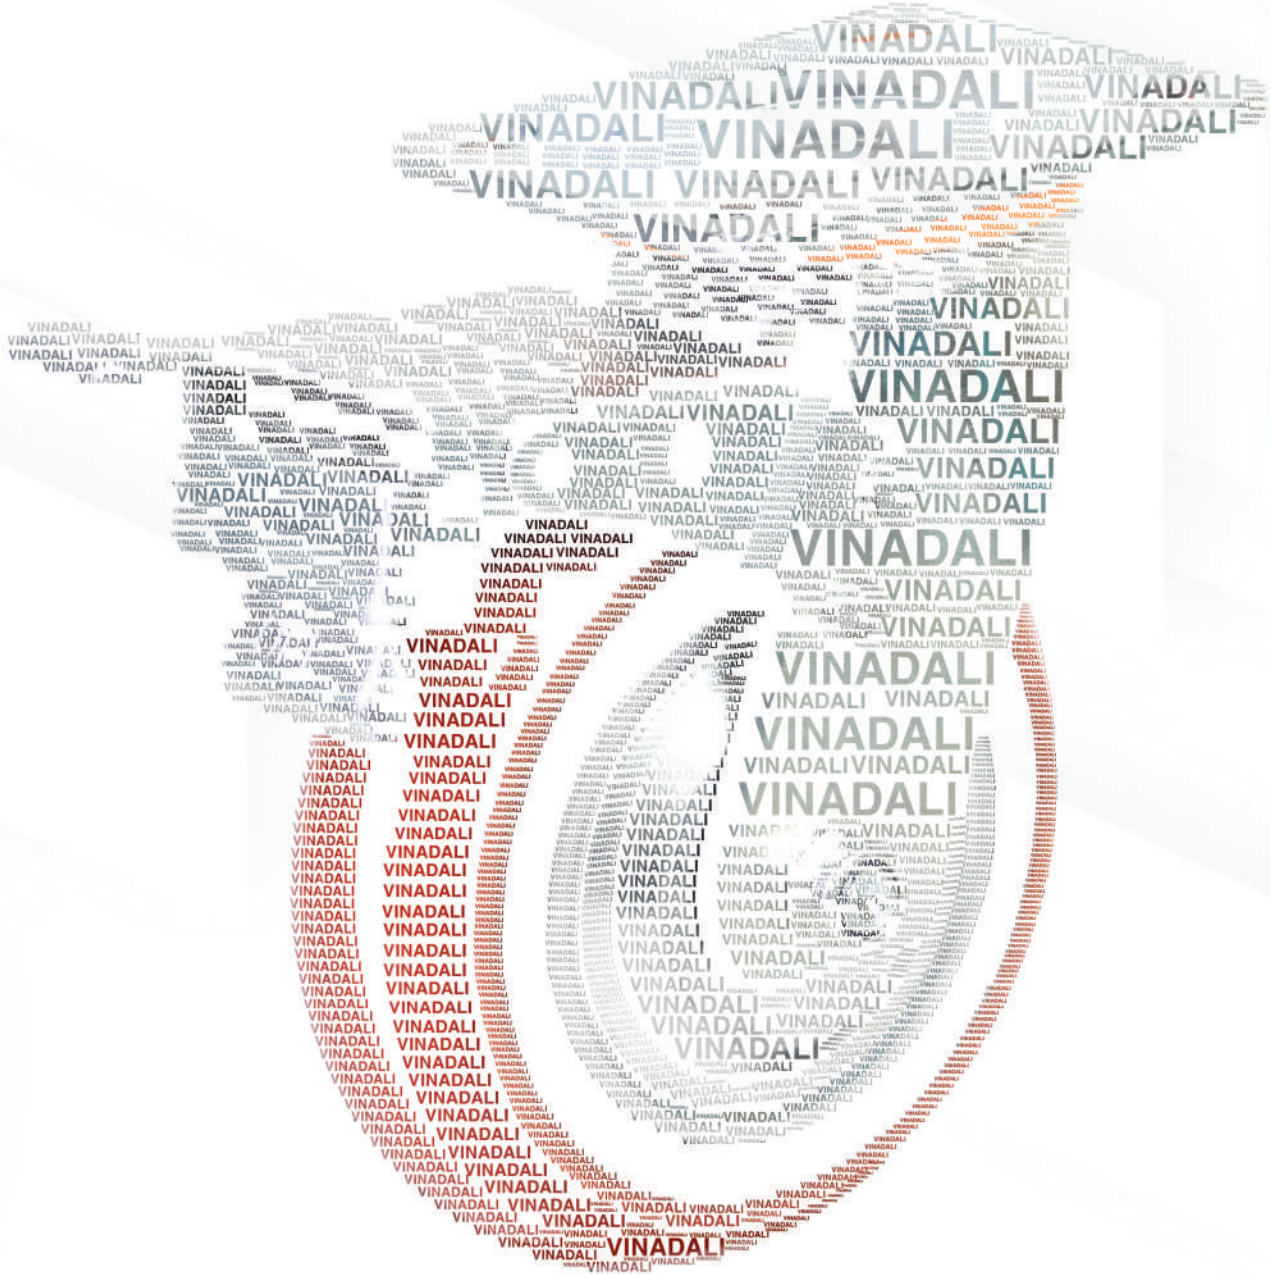

Your trust is our strength!



**VINADALI VIET NAM
COMPANY LIMITED**



+84 889.619.418

0283.535.5969



Info@vinadali.com



<https://vinadali.vn>

<https://vinadali.com>



59/22C, Tien Lan 12, Ba Diem Commune, Hoc Mon District, Ho Chi Minh City, Viet Nam