



LINUO SOLAR

540-555W

Monocrystalline PV Module
LSSMH144P Series (182)

12
year
product
warranty

25
year
power
warranty



MBB & Half Cut cell technology



Guaranteed 0~+5W positive tolerance to ensure power output



Dual stage 100% EL Inspection
Warranting Defect-Free Product



Ammonia & salt mist resistant



Excellent mechanical load 2400Pa
and snow load 5400Pa resistance



Lower BOS cost and LCOE




Excellent PID resistance.

Comprehensive Certificates

- IEC61215, IEC61730
- TUV, CE
- ISO9001: 2015
- ISO14001: 2015
- ISO45001: 2018




Superior Warranty

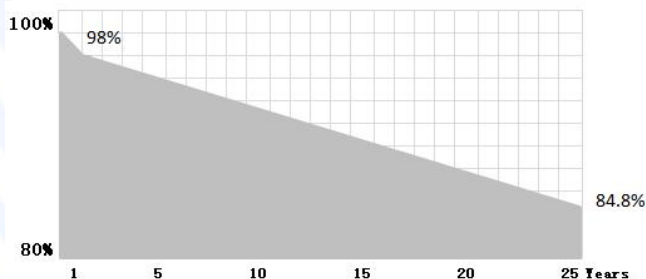



Mechanical Specifications @STC

Solar Cells:	Mono
Number of Cells:	144pcs
Module Dimension :	2278×1134×35mm
Weight:	27.5 kg
Snow/Wind Load:	5400/2400 Pa
Thickness of Glass:	3.2mm
Junction Box:	IP68, 3 Diodes
Connector:	HTC-16, IP68
Length:	(+)250mm /(-)300mm(including connector)

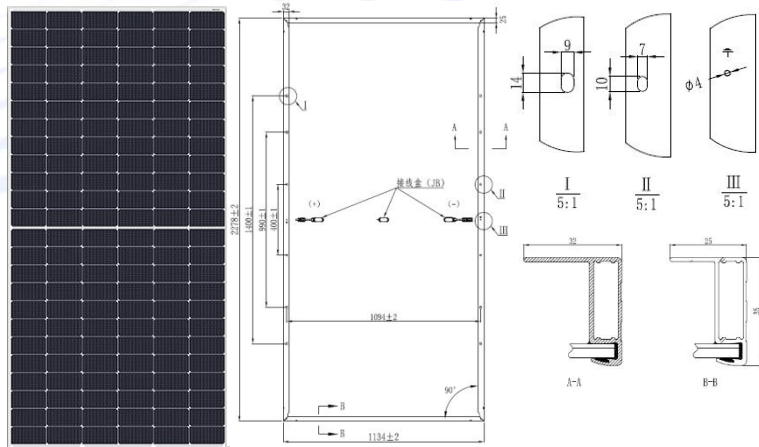


Electrical Specifications @STC

Pmax (W) 0~+5W	Umpp (V)	Impp(A)	Uoc (V) ±3%	Isc(A) ±3%	Module Efficiency	Max System Voltage	Max Series Fuse
540	41.03	13.17	49.47	13.64	20.90%	1500V	25A
545	41.16	13.25	49.61	13.72	21.10%	1500V	25A
550	41.29	13.33	49.72	13.81	21.29%	1500V	25A
555	41.42	13.40	49.87	13.88	21.48%	1500V	25A

Temperature Parameter

Temperature Cycling Range:	-40℃ ~ +85℃
Norminal Module Operating Temperature:	45±2 ℃
Temperature Coefficient of Isc:	0.021%/℃
Temperature Coefficient of Voc :	-0.250%/℃
Temperature Coefficient of Pmax :	-0.337%/℃

I-V Curve LSSMH144P-545W

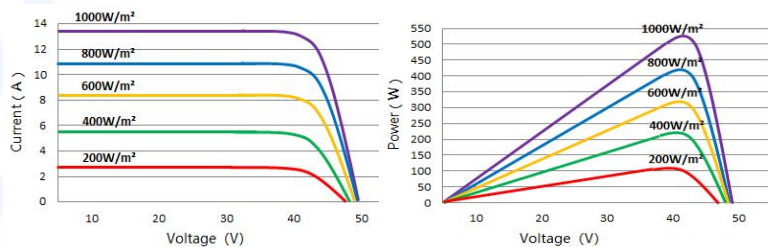

Packaging Configuration

Modules Per Pallet:	31pcs
Modules Per 40 ' HQ:	620pcs

Guarantee

12-year warranty on materials & workmanship
25-year linear power output warranty

※ Specifications subject to technical changes and tests, Linuo Power reserves the right of final interpretation.

Shandong Linuo Solar Power Technology Co.,Ltd

Add: No.30766 Jingshidong Road, Jinan Zone, CHINA(Shandong) Pilot Free Trade Zone

Web: <http://en.linuopv.com/>