



Apro-200

DATA

Rated solar panel: 10A

Normal input solar cell array voltage: 14-28V

Max solar cell array voltage (output has no load): 25V

Charge Voltage at 25°C: AGM battery-14.4V

Battery temperature compensation coefficient: -24mV/°C

PORTS

Input terminal: AMASS plug

Output terminal: ANDERSON plug

Input Port(Solar Port): 14-28V up to 10A

Fuse: 15A replaceable

GENERAL

Weight: 500 g


Dimensions: 120x70x25mm

IP Grade: IP65


Cable Length: 3m

Operating temperature: -25 to 50°C / -13 to 122°F


Warranty: 1Years

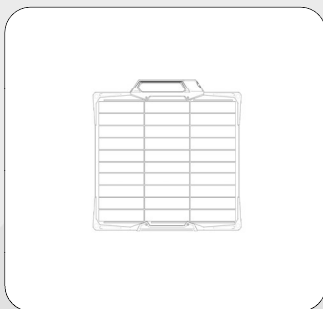

Water Proof

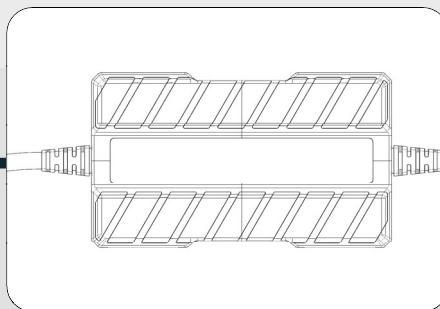

Plug in and Use

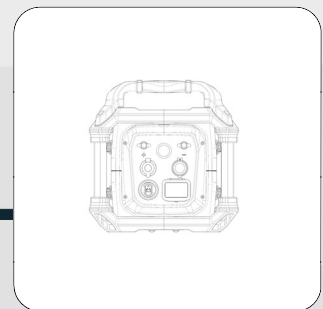

High Efficient Power

