





# الوادي

للشحومات والزيوت المعدنية

# WHAT ARE THE API SPECIFICATIONS?

API (American Petroleum Institute) defines the quality standards for engine oils using two service categories for gasoline (S) and diesel (C) engines respectively. The two letters are followed by a further progressive indication according to the updates. Products meeting each level are officially suitable where previous levels are required.

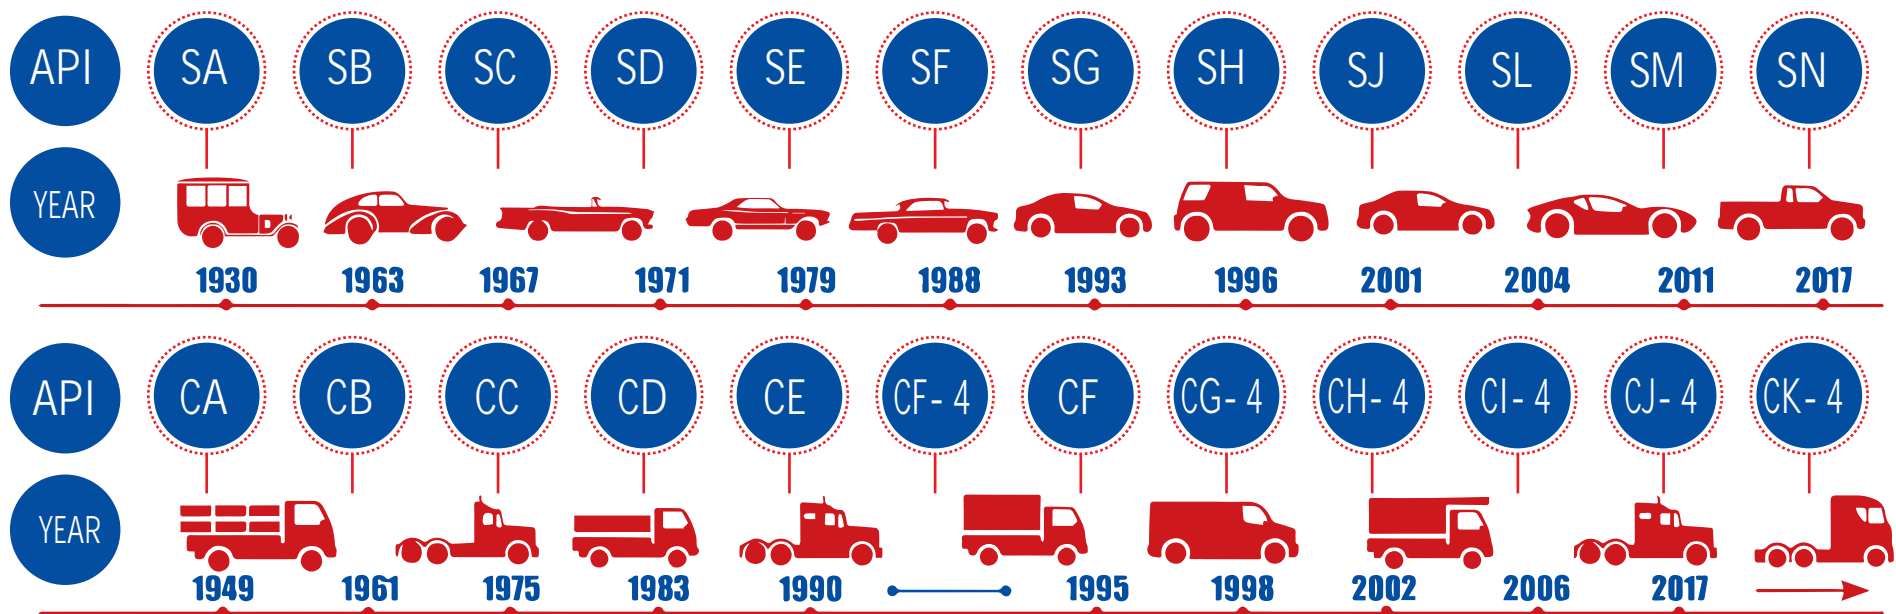

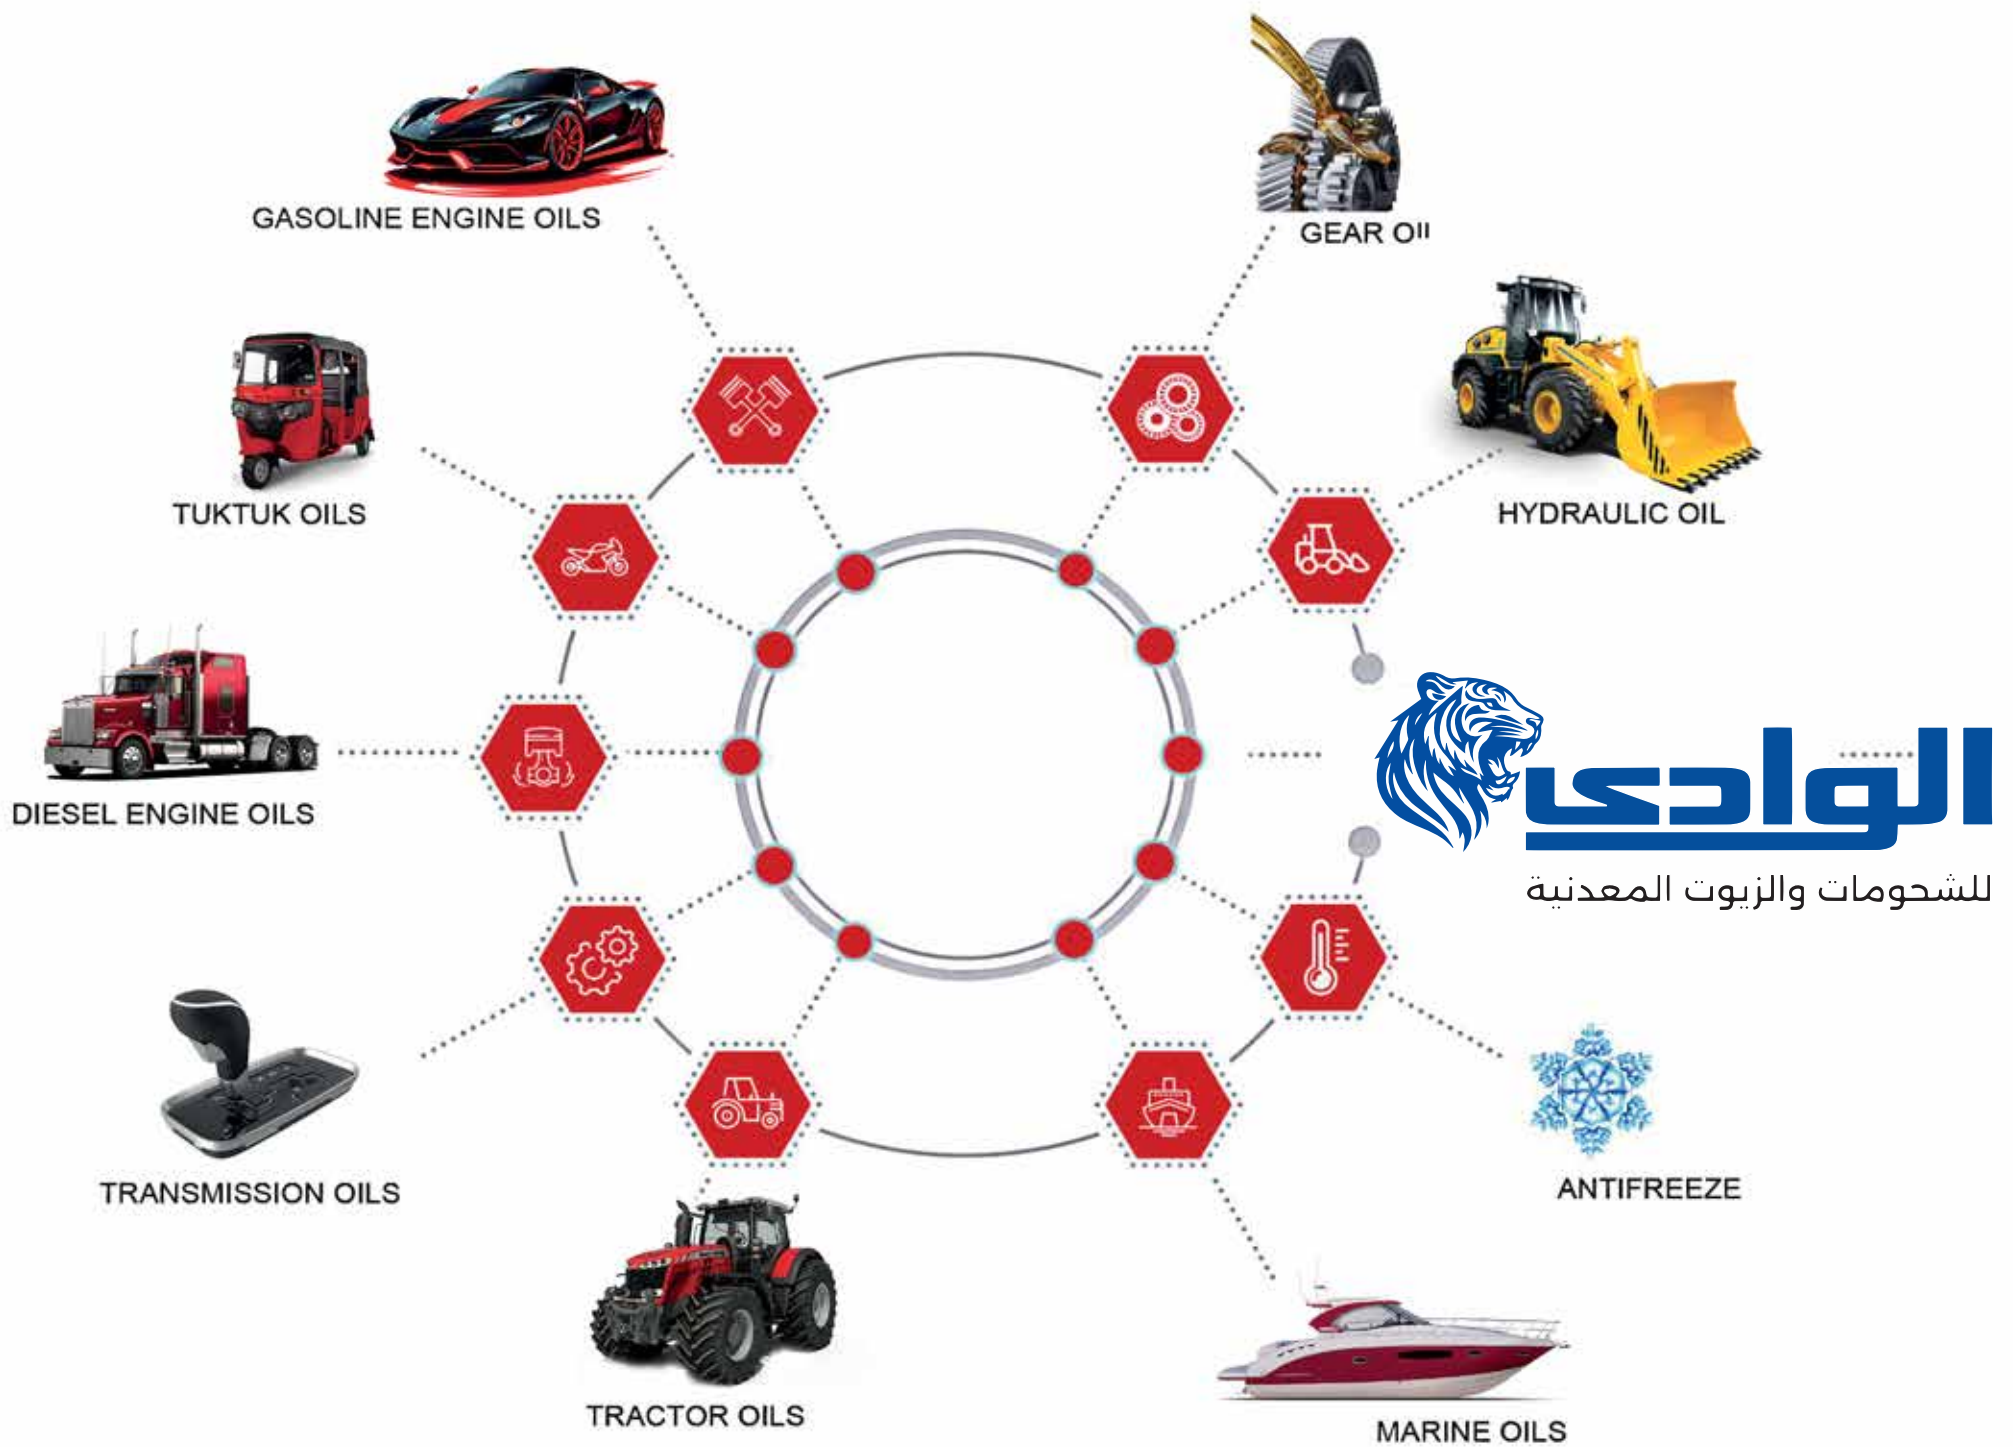





1.1 Automatic transmission fluid (ATF) is the fluid used in vehicles with selfshifting or automatic transmissions. It is typically colored red or green to distinguish it from motor oil and other fluids in the vehicle.

2.1 The fluid is optimized for the special requirements of a transmission, such as valve operation, brake band friction and the torque converter as well as gear lubrication.

3.1 ATF is also used as a hydraulic fluid in some power assisted steering systems, as a lubricant in some 4WD transfer cases, and in some modern manual transmissions.

4.1 ATF is not oil but a mixture of various chemical compounds containing a large number of additives. It must fulfill many specifications Other than lube oils. ATFs are specified mainly according to vehicle manufacturers' directives, common are DEXRON (General Motors) or MERCON (Ford).





**Description:** High quality gear oils. blended from high refined mineral base oil and selected chemical additives to provide anti rust, anti wear, anti foam and extreme pressure additives which fulfill performance level API GL5

**Applications:** VL 140 Gear oil is suitable for opened and closed gear which operate under high speed and low torque or low speed and high torque, also recommended for hypoid types and other automotive type equipments operated under heavy duty service. **Performance level:** Meet the requirements of High protection against wear and rust. -Excellent oxidation and thermal stability ensure longer service AND Can be used over a wide range of operating conditions specially heavy duty service.







## D50 API CD/SD SAE 50 :

Runtime: The safest runtime for this product is 1,500 km and this represents 75% of the lifetime of oil under normal working conditions Product features:

Preventing the oil from breaking down under heavy operating conditions. • Contains a superior group of additives to prevent wear, chemical and. mechanical corrosion.





High quality multi-purpose grease MP2  
Used for lubrication and care of all equipment And the  
:machines that require  
The highest performance rates and standard conditions such-  
as high temperature and  
humid environment  
High resistance to corrosion, rust and oxidation High water -  
resistance and high performance mechanical stability  
-Conforms to Egyptian and American standards Gross weight:  
approximately 14 kg  
Store in a dry place  
Do not expose to direct sunlight Manufactured by Al-Wadi  
Lubricants Company  
And mineral oils  
Validity is five years from the recorded





VALLEY OIL API CS/SF Series Supreme quality diesel engine oil manufactured from a very high-quality base stocks and specially selected additive package, suitable for normally aspirated as well as turbo charged diesel engines ideally used in automotive fleets operating with varied engines of different types and models. Also suitable for use in four stroke cycle gasoline engines. The outstanding quality of this oil is shown by the varied and different specifications that the oil meets. Designed to Perform

#### **Oxidation Resistance - VALLEY OIL API**

CD/Sf Monograde Series provides a good oxidation stability that reduced engine deposits and sludge build up, the advance anti-oxidant additive present slows down the oil degradation ensuring longer maintenance intervals.

Antifoam - Increased Performance Easy release of entrained air which will protect in over heating of the system and protects the oil surface area in further exposure to oxygen.

Advance Detergent Additive System - Improves Engine Cleanliness. These additives help to remove impurities that travel to the oil filter while also cleaning existing deposits and foreign substances in the engine. This increase in engine cleanliness helps to reduce the damage these contaminants may have caused.

#### **Anti-wear, Anti-corrosion & Anti-rust Protection**

Longer Equipment Life, proven anti wear, anti-corrosion and anti-rust additive packages provide greater resistance and extend engine life and provides low maintenance costs. These properties of

VALLEY OIL API CD/SF Monograde Series prevent rust development by creating a thin film on the engine metal surfaces or any adjacent component of thus preventing the moisture absorption of its metal parts.







## D50 API CD/SD SAE 50 :

**Runtime:** The safest runtime for this product is 1,500 km and this represents 75% of the lifetime of oil under normal working conditions **Product features:**

Preventing the oil from breaking down under heavy operating conditions. • Contains a superior group of additives to prevent wear, chemical and mechanical corrosion.

Packed in the EL WADY Factory  
for oil and grease



Packed in the EL WADY Factory  
for oil and grease



## HYORAULIC HLP-68

High viscosity gear oil that performs in the hardest operating conditions and keeps the gear set from wear for a long time High viscosity gear oil that performs in the hardest operating conditions and keeps the gear set from wear for a long time.





## D50 API CD/SD SAE 50 :

Runtime: The safest runtime for this product is 1,500 km and this represents 75% of the lifetime of oil under normal working conditions Product features:

Preventing the oil from breaking down under heavy operating conditions. • Contains a superior group of additives to prevent wear, chemical and mechanical corrosion.






مركب تشحيم التروس البطيء المفتوحة ذات السرعات  
المحدودة طبقاً للقرار الوزاري رقم 4181/1996  
الصلاحية خمس سنوات من تاريخ الإنتاج ويعاد التقييم

خلط وتعبئة



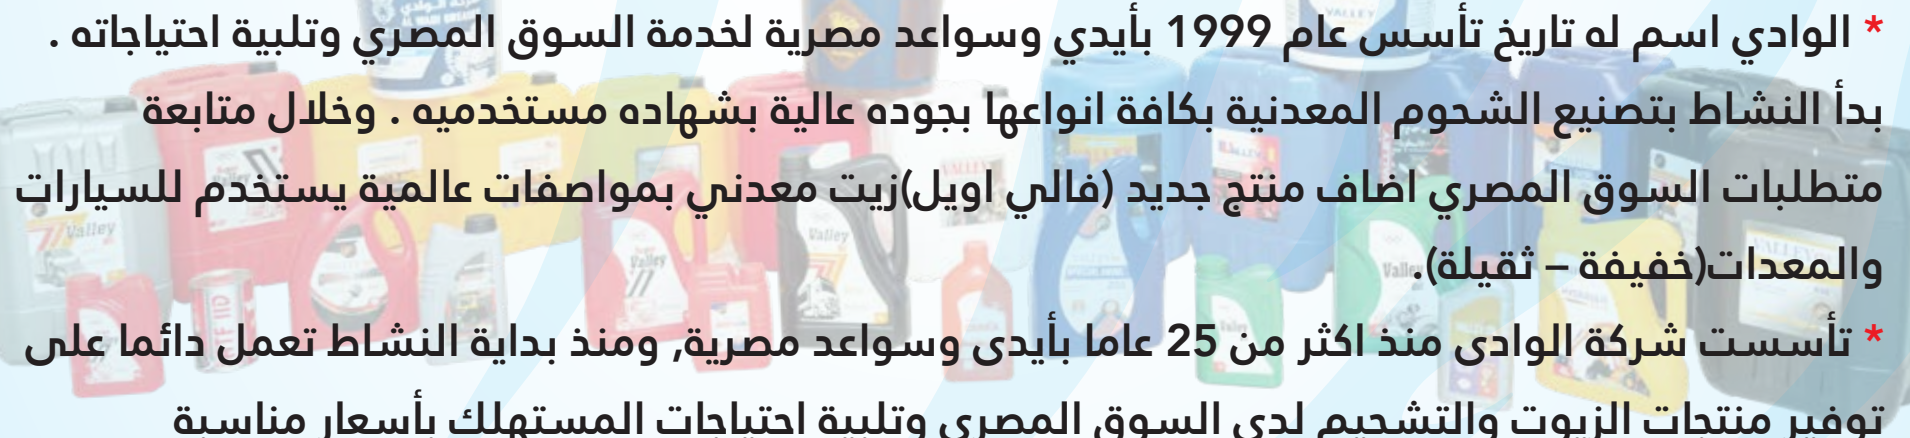

- 
- \* الوادي اسم له تاريخ تأسس عام 1999 بأيدي وسواعد مصرية لخدمة السوق المصري وتلبية احتياجاته . بدأ النشاط بتصنيع الشحوم المعدنية بكافة انواعها بجوده عالية بشهاده مستخدميه . وخلال متابعة متطلبات السوق المصري اضاف منتج جديد (فالي اويل) زيت معدني بمواصفات عالمية يستخدم للسيارات والمعدات (خفيفة - ثقيلة).
  - \* تأسست شركة الوادي منذ اكثر من 25 عاما بأيدي وسواعد مصرية, ومنذ بداية النشاط تعمل دائما على توفير منتجات الزيوت والتشحيم لدى السوق المصري وتلبية احتياجات المستهلك بأسعار مناسبة وذلك عن طريق التواصل المباشر مع العملاء ومتابعة الحالة الاقتصادية للبلاد.
  - \* تعد شركة الوادي من اقدم شركات خلط وتعبئة الزيوت المعدنية حيث تأسست عام 1999 بأيدي وسواعد مصرية, اى منذ 25 عاما وهى تساهم بدور كبير داخل السوق المصري من خلال اضافة منتجات تشحيم وتزيت للسيارات والمعدات بكافة انواعها وبجوده عالية مطابقة للمواصفات العالمية وبأسعار تناسب المواطن المصري.
  - \* فالى اويل منتج مصرى 100 % تم انتاجه من زيوت معدنية عالية الكفاءة طبقا للمعايير الدولية والعالمية, معبأ بواسطة شركة الوادي لتعبئة الشحوم والزيوت المعدنية والتي تهدف دائما الى توفير منتجات شحوم وزيوت محلية بمواصفات عالمية منذ تأسيسها عام 1999 بأيدي وسواعد مصرية .



# الوادى

للمشحومات والزيوت المعدنية



جمصة - المنطقة الصناعية



01020049993 - 0502770757-01000007429-01062926290

