

◆ Profile of Enterprise 公司简介

Anping DuoZhuang Wire Mesh Products Co., Ltd. is located in Anping, Hebei, China and started as a professional factory in 2009. As a manufacturer and exporter of high-quality wire mesh products and punched metal, we have our own quality inspection department wire drawing workshop, welding workshop, mesh weaving workshop, stamping workshop, 12 senior technicians, and 60 experienced workers to ensure product The factory qualification rate reaches 98%. Due to our high-quality products and excellent customer service, we have established a global sales network covering the United States, the Middle East, Europe and Africa. Anping County DuoZhuang Wire Mesh Co., Ltd. has successfully passed the ISO9001 quality management system and ISO14000 international environmental management system.




We have 10 experienced foreign trade sales staff in our Sales Department. They can answer and resolve all your problems and even can individually tailored solutions for every customer. The company adheres to technological innovation, scientific management, and honest management, pays attention to the introduction of advanced production technology and equipment, and strictly controls key links such as raw material procurement, production management, and product testing to ensure product quality and win the trust of customers. We have a great deal of experience not only in making quality products, but ensuring that we are able to supply what we promise, then we promise it. In the future, we will go on to attach importance to the credibility administration, so that we can establish long term business relationship with you!

With our rich production technical and experience, DZ is very pleased to supply you with our all types of decorative metal fabric products to meet your various applications. Furthermore, we will cooperate with you closely to design and develop the new types to meet your continuous updated requirements.


DuoZhuang can provide woven wire mesh for architecture & decorations and these products are used mainly as decorative coverings for the whole buildings, walls, ceiling or floors.



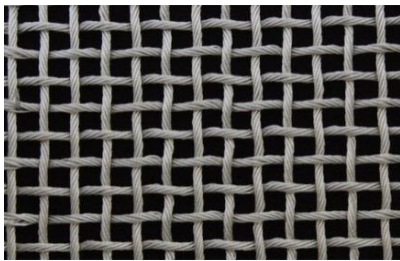

DZ-A-59-30

Material 材质: AISI304, AISI316
Rod diameter 杆直径: 2.0mm
Hole distance 孔: 4.5x4.5mm
Application: Partition Wall
应用: 隔断墙

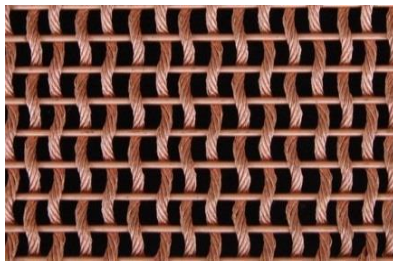


DZ-I3-39-2-30

Material 材质: SS304, SS316
Rod diameter 杆直径: 2.0mm
Rod center distance 杆中心距: 8.0mm
Rope diameter 绳直径: 2.6mm
Rope center distance 绳中心距: 6.0mm
Application: Curtain wall, partition
应用: 幕墙, 隔断




DZ1255

Material 材质: SS304, SS316
Warp diameter 经线: 1.2mm x2
Warp pitch 经线节距: 5mm
Weft diameter 纬线: 2mm
Weft pitch 纬线节距: 5mm
Weight: 8.74kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

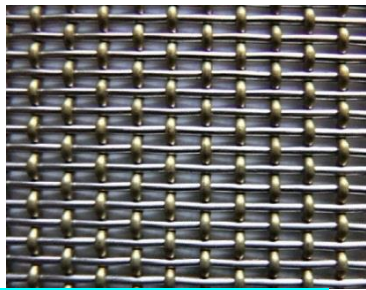


DZ-6510

Material: Stainless Steel, Copper 不锈钢, 铜
Open area 开孔率: 32%
Warp diameter 经线: 1.35mm
Warp pitch 经线节距: 2.5mm
Weft diameter 纬线: 1.6mm
Weft pitch 纬线节距: 5.4mm
Weight 重量: 7.64kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

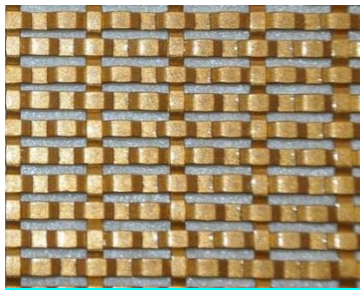


DZ-8222

Material 材质: AISI304, AISI316
Open area 开孔率: 23%
Warp diameter 经线: 3.3 x 0.9mm
Warp pitch 经线节距: 2.5mm
Weft diameter 纬线: 1.6mm
Weft pitch 纬线节距: 5.4mm
Weight 重量: 7.64kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

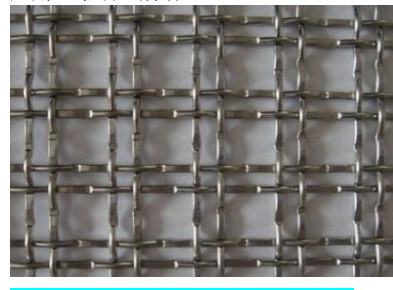

DZ-6226

Material 材质: AISI304, AISI316
Open area 开孔率: 83%
Warp diameter 经线: 2mm x2
Warp pitch 经线节距: 22.5mm
Weft diameter 纬线: 2mm x2
Weft pitch 纬线节距: 22.5mm
Weight 重量: 4.5kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

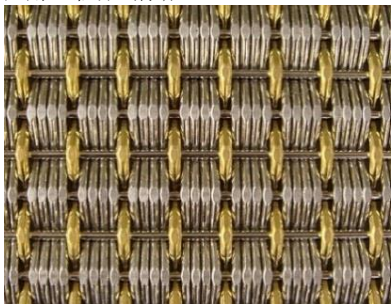

DZ-6156-T

Material: Stainless Steel, Copper
材质: 不锈钢, 铜
Open area 开孔率: 0%
Weight 重量: 13kg/m²
Application: Cladding 室外装饰



DZ-6112

Material 材质: AISI304, AISI316
Open area 开孔率: 52%
Warp diameter 经线: 2mm
Warp pitch 经线节距: 32mm
Weft diameter 纬线: 2mm
Weft pitch 纬线节距: 4.5mm
Weight: 6.4kg/m²
Application: Metal Facades, Metal Columns
应用: 外墙, 幕墙



DZ-6225


Material 材质: AISI304, AISI316
Open area 开孔率: 64%
Warp diameter 经线: 3mm
Warp pitch 经线节距: 20mm
Weft diameter 纬线: 2.5mm
Weft pitch 纬线节距: 10mm
Weight: 6.83kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

◆ Decorative Wire Mesh Screen 幕墙网




DZ-A-37-2-30

Material 材质: AISI304, AISI316
Rod diameter 杆直径: 1.5mm
Rod center distance 杆中心距: 3.0mm
Rope diameter 绳直径: 0.75mmx4
Rope center distance 绳中心距: 26.4mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

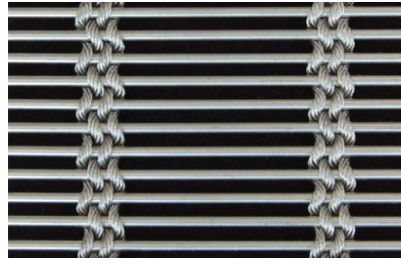


DZ-A-26-30

Material 材质: SS304, SS316
Rod diameter 杆直径: 3.0mm
Rod center distance 杆中心距: 6.0mm
Rope diameter 绳直径: 2.0mmx4
Rope center distance 绳中心距: 50mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

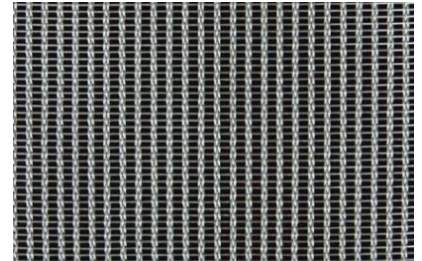


DZ-A-22-30

Material 材质: SS304, SS316
Rod diameter 杆直径: 0.5mm
Rod center distance 杆中心距: 1.6mm
Rope diameter 绳直径: 0.5mmx3
Rope center distance 绳中心距: 3.5mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

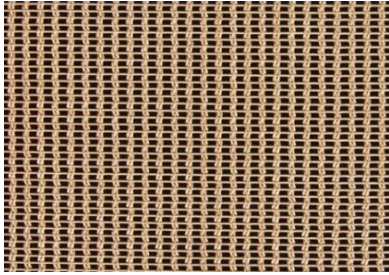


DZ-4305-T

Material 材质: Phosphor copper 铜
Rod diameter 杆直径: 0.5mm
Rod Pitch 杆中心距: 1.6mm
Cable diameter 绳直径: 0.45mmx3
Cable Pitch 绳中心距: 3.5mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

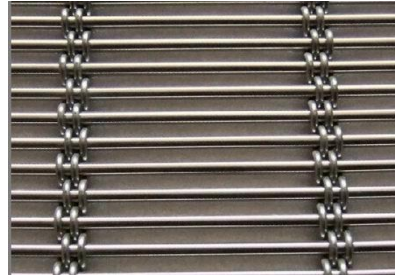


DZ-405-S

Material 材质: AISI304, AISI316
Warp diameter 经线: 1.8mm x4
Warp pitch 经线节距: 50mm
Weft diameter 纬线: 3mm
Weft pitch 纬线节距: 8mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

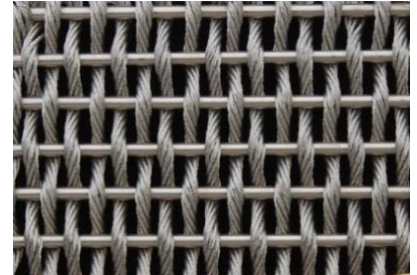


DZ-A-36-30

Material 材质: AISI304, AISI316
Rod diameter 杆直径: 3.0mm
Rod center distance 杆中心距: 10.0mm
Rope diameter 绳直径: 3mm
Rope center distance 绳中心距: 5mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

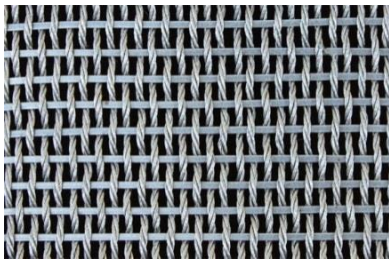


DZ-A-20-30

Material 材质: AISI304, AISI316
Rod diameter 杆直径: 0.75x1.8mm
Rod center distance 杆中心距: 6.2mm
Rope diameter 绳直径: 1.7mm
Rope center distance 绳中心距: 3.2mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

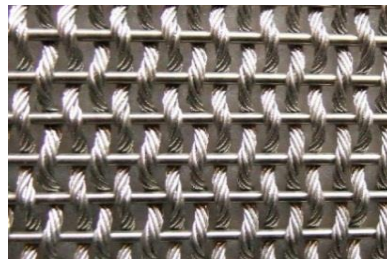

DZ-4510

Material 材质: AISI304, AISI316
Rod diameter 杆直径: mm
Rod center distance 杆中心距: mm
Rope diameter 绳直径: mm
Rope center distance 绳中心距: mm
Open area: 28%
Weight: 17kg/m²
Application: Metal Facades, Metal Columns
应用: 外墙, 幕墙

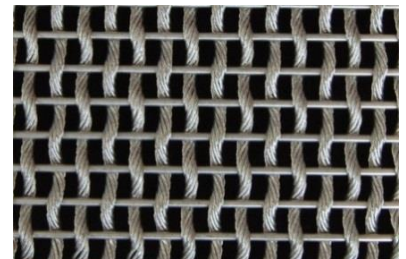

DZ-A-37-2-30

Material 材质: AISI304, AISI316
Rod diameter 杆直径: 2.0mm
Rod center distance 杆中心距: 8.0mm
Rope diameter 绳直径: 2.5mm
Rope center distance 绳中心距: 6mm
Application: Curtain wall, partition
应用: 幕墙, 隔断



DZ-6410

Material 材质: AISI304, AISI316
Warp diameter 经线: 2.45mm x3
Warp pitch 经线节距: 100mm
Weft diameter 纬线: 4mm
Weft pitch 纬线节距: 13.5mm
Weight: 8.68kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断



DZ-6510

Material: Stainless Steel 不锈钢
Warp diameter 经线: 1.35mm
Warp pitch 经线节距: 2.5mm
Rod diameter 纬线: 8.3mm
Rod Distance 节距: 4x4x8mm
Application: Curtain wall, partition
应用: 幕墙, 隔断



DZ-6152

Material: Stainless Steel 不锈钢
Open area 开孔率: 0%
Warp diameter 经线: 1.5mm
Warp pitch 经线节距: 6.7mm
Weft diameter 纬线: 2mm
Weft pitch 纬线节距: 2mm x 4
Weight 重量: 14.8kg/m²
Application: Cladding 室外装饰



DZ-A-66-30

Material 材质: SS304, SS316
Rod diameter 杆直径: 2.0mm
Rod center distance 杆中心距: 3.9mm
Rope diameter 绳直径: 1.5mm
Rope center distance 绳中心距: 22mm
Application: Curtain wall, stair guarding
应用: 幕墙, 楼梯隔断



DZ-8222

Material 材质: AISI304, AISI316
Open area 开孔率: 0%
Cable diameter 经线: 2mm x 1
Cable pitch 经线节距: 17.5mm
Rod diameter 纬线: 1.5mm
Weft pitch 纬线节距: 1.5mm
Application: Curtain wall, partition
应用: 幕墙, 隔断




DZ-6152-T

Material: Copper 铜
Open area 开孔率: 0%
Warp diameter 经线: 1.5mm
Warp pitch 经线节距: 6.7mm
Weft diameter 纬线: 2mm
Weft pitch 纬线节距: 2mm x 4, 1.5mm x 4
Weight 重量: 16kg/m²
Application: Cladding 室外装饰




DZ-A-47-09

Material 材质: SS304, SS316
Warp diameter 经线: 1mm
Warp pitch 经线节距: 4x4x8mm
Weft diameter 纬线: 1x4mm
Weft pitch 纬线节距: 7mm
Application: Suspended Ceiling, partition
应用: 吊顶, 隔断墙

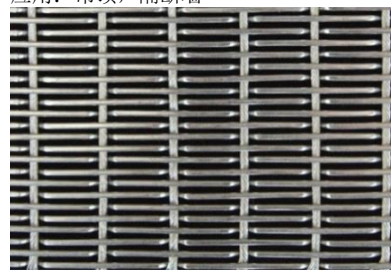


DZ-6226

Material 材质: AISI304, AISI316
Open area 开孔率: 83%
Warp diameter 经线: 1.5mm
Warp pitch 经线节距: 3.5mm
Weft diameter 纬线: 2mm
Weft pitch 纬线节距: 17.5mm
Application: Curtain wall, partition
应用: 幕墙, 隔断

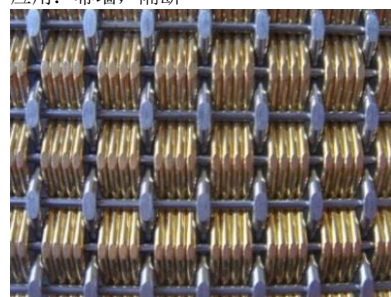


DZ-6513

Material 材质: Stainless Steel 不锈钢
Open area 开孔率: 0%
Warp diameter 经线: 1.5mm
Warp pitch 经线节距: 6.7mm
Weft diameter 纬线: 2mm
Weft pitch 纬线节距: 2mm x 4, 1.5mm x 4
Weight 重量: 15kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

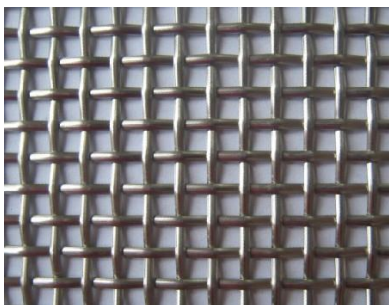

DZ-1705

Material 材质: AISI304, AISI316
Warp diameter 经线: 5mm
Warp pitch 经线节距: 5mm
Weft diameter 纬线: 1.2mm x 1mm
Weft pitch 纬线节距: 5mm
Weight: 3.36kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

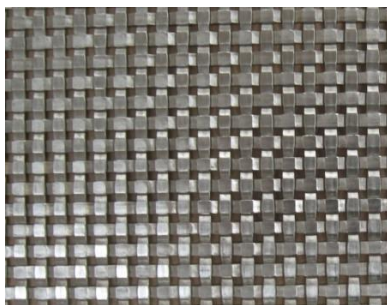


DZ-8535

Material 材质: SS304, SS316
Warp diameter 经线: 2.7mm x 1.6mm
Warp pitch 经线节距: 6.4mm
Weft diameter 纬线: 2.7mm x 1.6mm
Weft pitch 纬线节距: 6.4mm
Weight: 11kg/m²
Application: Curtain wall, stair guarding
应用: 幕墙, 楼梯隔断




DZ-8156

Material 材质: SS304, SS316
Warp diameter 经线: 6mm x 1.5mm
Warp pitch 经线节距: 12mm
Weft diameter 纬线: 6mm x 1.5mm
Weft pitch 纬线节距: 12mm
Weight: 12.23kg/m²
Application: Suspended Ceiling, partition
应用: 吊顶, 隔断墙

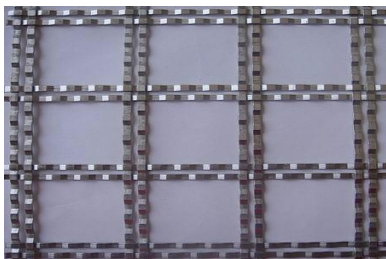

DZ-8216

Material: Stainless Steel 不锈钢
Open area 开孔率: 80%
Wire diameter 线径: 2.7x1.6mm
Pitch 节距: 26mm
Weight: 3.36kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

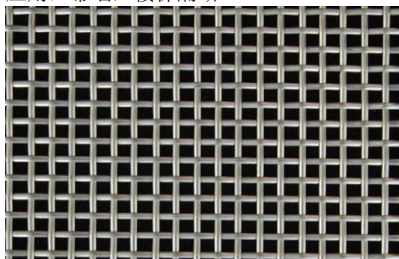


DZ-A-F-30

Material: Stainless Steel 不锈钢
Wire diameter 线径: 0.75x1.8mm
Pitch 节距: 5mm
Application: Curtain wall, partition
应用: 幕墙, 隔断




DZ-8272

Material: Stainless Steel 不锈钢
Open area 开孔率: 37%
Wire diameter 线径: 7x1mm
Pitch 节距: 36mm
Weight: 6.35kg/m²
Application: Curtain wall, partition
应用: 幕墙, 隔断

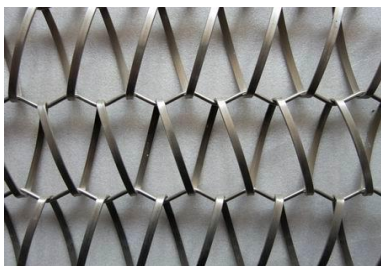


DZ-6152

Material: Stainless Steel 不锈钢
Open area 开孔率: 64%
Spiral Wire diameter 螺旋丝径: 6x1mm
Spiral Wire pitch 螺旋丝节距: 36mm
Cross wire diameter 穿条: 3mm
Cross wire pitch 穿条节距: 64.5mm
Weight 重量: 3.8kg/m²
Application: Cladding 室外装饰

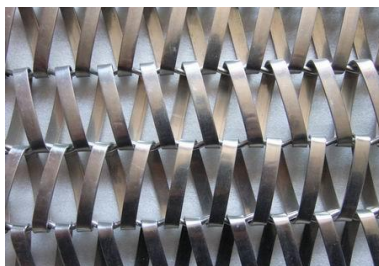

DZ-6152-T

Material: Stainless Steel 不锈钢
Open area 开孔率: 28%
Spiral Wire diameter 螺旋丝径: 7x1mm
Spiral Wire pitch 螺旋丝节距: 20mm
Cross wire diameter 穿条: 3mm
Cross wire pitch 穿条节距: 40mm
Weight 重量: 7.63kg/m²
Application: Cladding 室外装饰

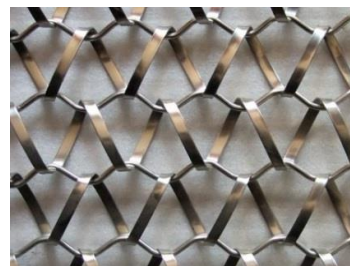

DZ-6513

Material 材质: Stainless Steel 不锈钢
Open area 开孔率: 56%
Weight 重量: 5.3kg/m²
Application: Cladding 室外装饰

Project Show:

