










# TABLE OF CONTENTS

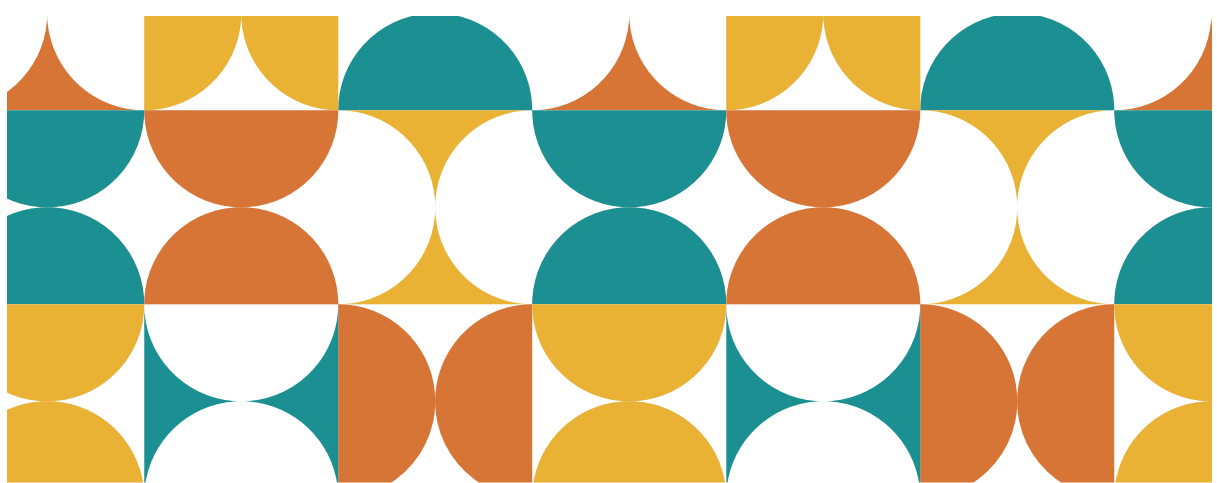

## **BOPP TAPES**

- Packaging Tape
- Printed BOPP Tape
- Easy Tear Tape
- Low Noise Tape
- No Noise Tape
- Machine Roll
- High Shear Tape
- Hot Melt Tape
- Invisible Tape
- Metallized Tape
- Water Resistant Tape
- Freezer Tape
- Double Sided Tape
- Self Strip Tape
- Non-Adhesive Tape
- Holo Graphic Tape
- Neck Sealing Tape
- Cold Lamination Tape
- Polyolefin Shrink Film
- PVC Shrink Film
- Poly Ethylene Shrink Film

## **TISSUE TAPES**

- Hot Melt Tape
- Solvent Based Tape
- Acrylic Tape

## **PAPER PACKAGING TAPES**

- Self Adhesive Kraft Tape
- Water Activated Tape
- Reinforced Water Tape
- Self Adhesive Crepe Tape

## **MASKING TAPES**

- Masking Tape-K6143
- Masking Tape-P6035
- Automotive Tape

## **FOAM TAPES**


- Gasket Tape
- Insulation Tape
- Mounting Tape

## **SURFACE PROTECTION TAPES**

- Surface Tape
- Floor Guard Tape
- Carpet Tape
- Aluminium Panel Tape
- Low Peel Tape
- Laminate Tape



# TABLE OF CONTENTS

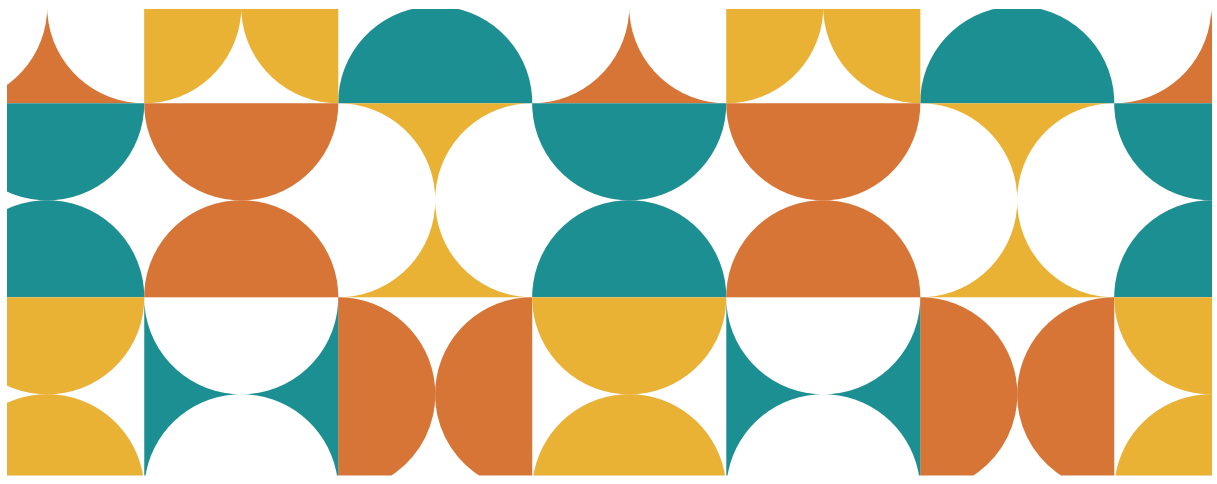

7

## REINFORCED TAPES

- Duct Tape
- Cross Filament Tape
- Mono Filament Tape
- HDPE Fabric Tape

10

## MARKING & WARNING TAPES

- PVC Tape
- Ultra Tape
- Warning Tape

8

## POLYESTER TAPES

- PET Holding Tape
- Double Sided PET Tape
- Recycled Tape

11

## ELECTRICAL INSULATION TAPES

- PVC Insulation Tape
- PE Insulation Tape
- MX Wonder Tape

9

## ALUMINIUM FOIL TAPE

- Aluminium Foil Tape

12


## SPECIAL APPLICATION TAPES

- Air Ventilation Tape
- Aluminium Bitumen Tape
- Abhedya Bitumen Tape
- Pipe Wrapping Tape





# TABLE OF CONTENTS

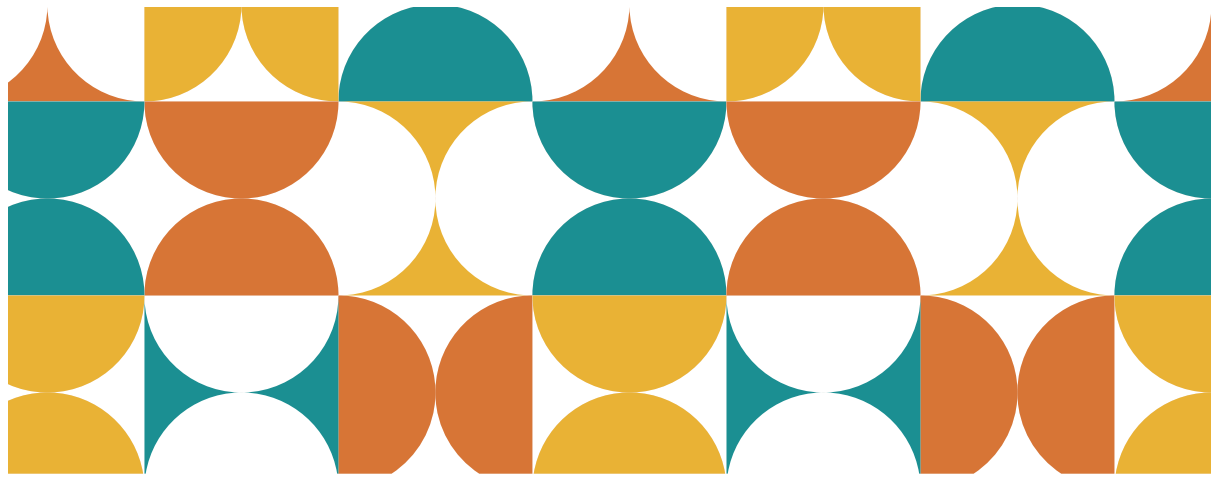

**13** **NEW PRODUCT LINE**  
• Poly Coated Release Liners

**15** **DISPENSERS**  
• Mini Tape Dispenser  
• Handy Tape Dispenser  
• Green Wrap Dispenser  
• Green Fill Dispenser

**14** **PROTECTIVE PACKAGING**  
• Green Wrap  
• Green Fill  
• Stretch Film

**16** **WATER ACTIVATED DISPENSERS**  
• Manual Table Top Dispenser  
• Semi Automatic Dispenser  
• Fully Automatic Dispenser






# PACKAGING TAPE

Packaging tape is designed for a wide range of sealing and packing needs, from lightweight to heavy-duty applications. It ensures secure closure for corrugated boxes, making them ideal for shipping and storage.

With superior tear resistance and ultra-strong adhesion, this tape provides long-lasting durability and reliability. It withstands varying temperatures and humidity, ensuring optimal performance in different environments.

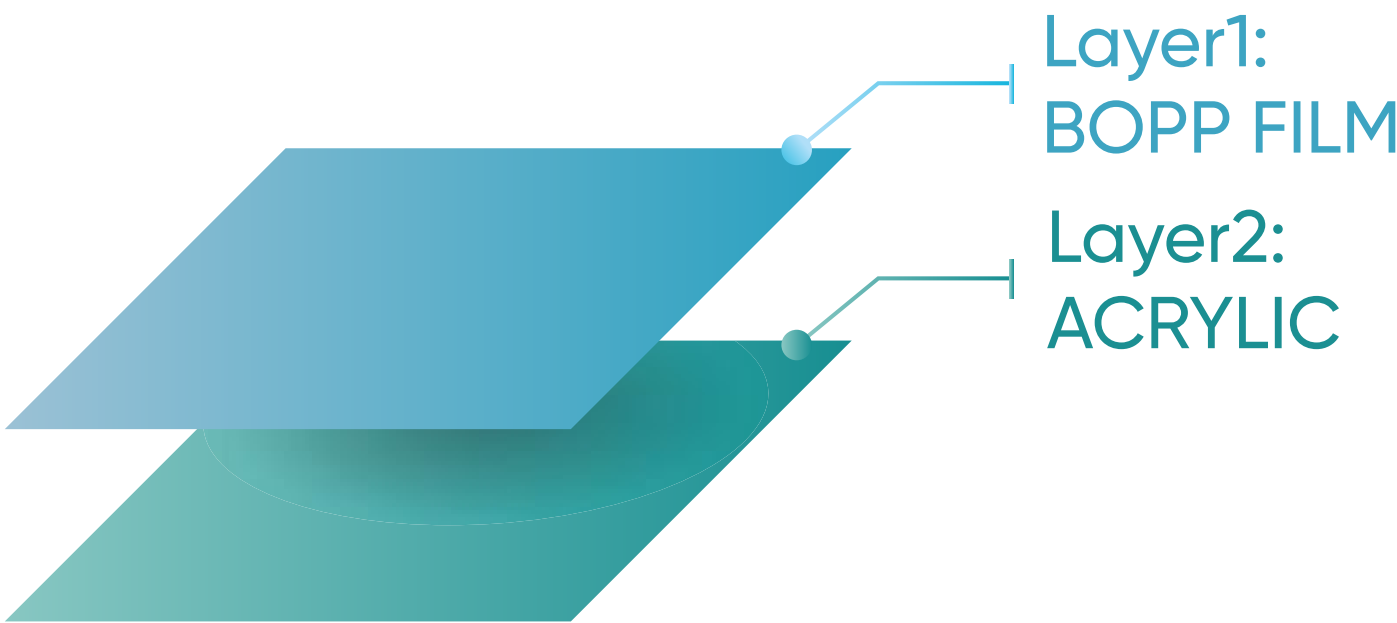

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23μ	36μ/1.44 mil	< 13 cm	> 600 mins	> 380 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23μ	38μ/1.52 mil	< 12 cm	> 1200 mins	> 420 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 12 cm	> 1500 mins	> 440 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23μ	45μ/1.8 mil	< 7.5 cm	> 2200 mins	> 560 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25μ	48μ/1.92 mil	< 7 cm	> 2500 mins	> 580 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29μ	50μ/2 mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29μ	55μ/2.2 mil	< 6.5 cm	> 3000 mins	> 600 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 5000 mins	> 850 g/in	> 4.2 kg/cm

## Variants

- Colors
  - Transparent
  - Brown
  - White
  - Custom Colors
- Slit Material
  - Width: 9mm to 100mm
  - Length: 3mtr to 2000 mtrs
- Jumbo Rolls
  - Width: 1025mm to 1610mm
  - Length: 4000-8000mtrs
- Small Jumbo Rolls
  - Width: 144, 240 & 288mm
  - Length: 2000mtrs

## Feature

- Cost Effective
- Long Shelf Life
- Good Tensile Strength
- Ageing Resistant
- Strong OPP Film
- Easy to apply

## Application

- Bonding
- Sealing
- Joining
- Heavy Duty Packaging







# PRINTED BOPP TAPE

Our printing technology offers up to 6-colour sandwich printing for vibrant and detailed designs.

We accommodate low MOQs to support businesses of all sizes.

With Roto Gravure printing, we ensure sharp, high-quality prints that enhance branding. Perfect for premium packaging solutions with precision and consistency.

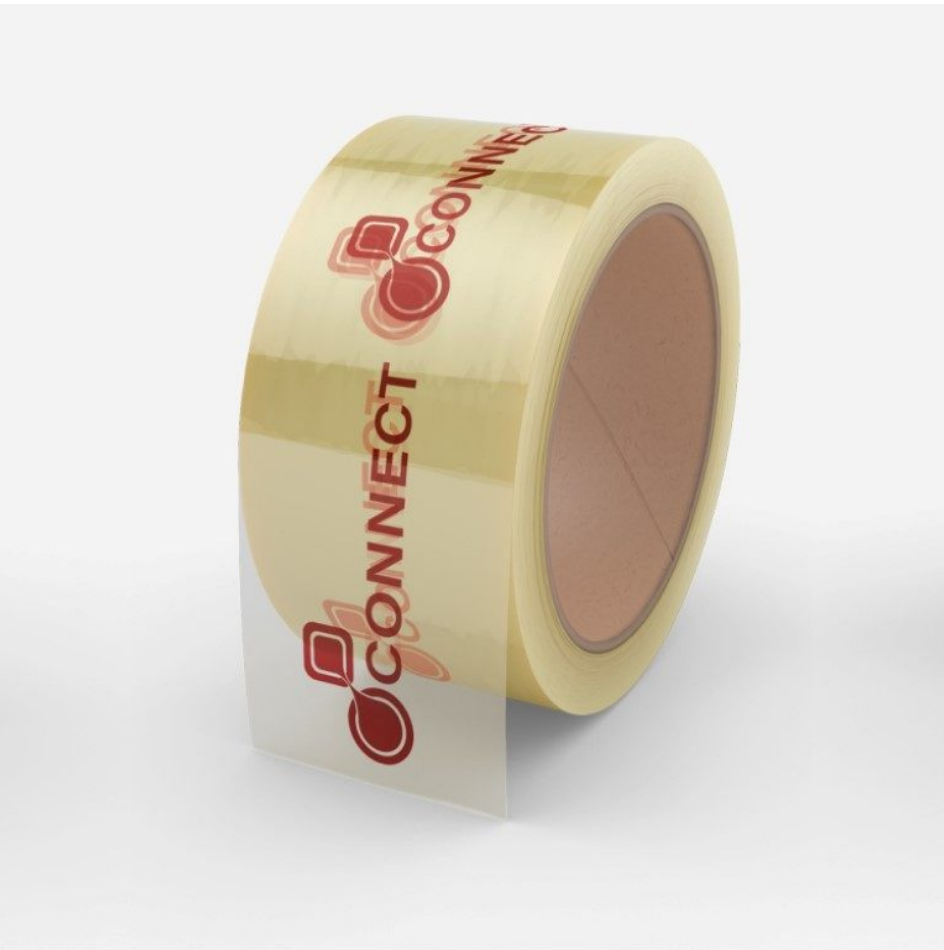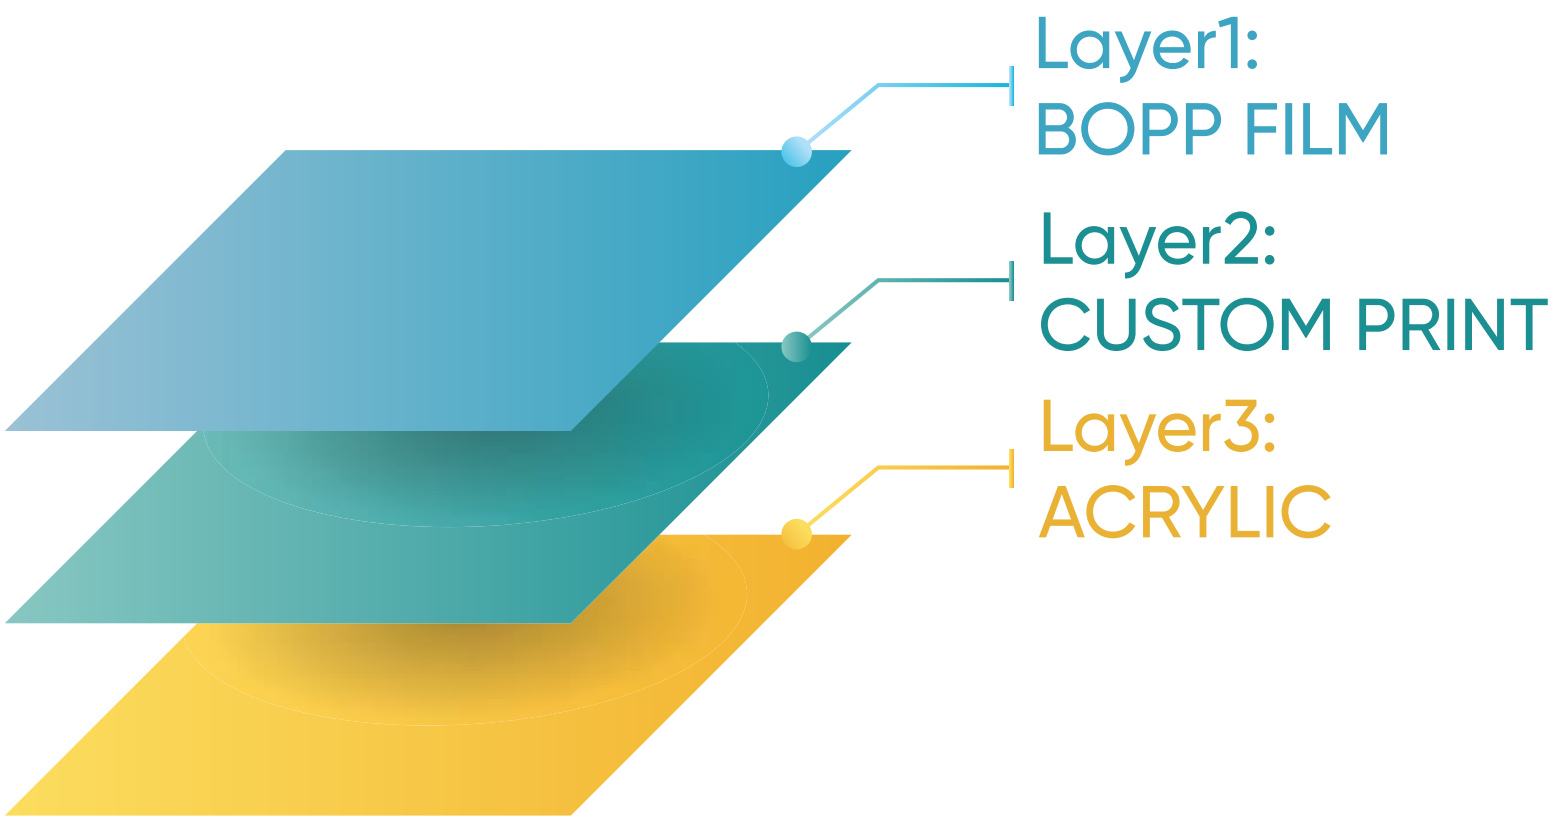

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23μ	36μ/1.44 mil	< 13 cm	> 600 mins	> 380 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23μ	38μ/1.52 mil	< 12 cm	> 1200 mins	> 420 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 12 cm	> 1500 mins	> 440 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23μ	45μ/1.8 mil	< 7.5 cm	> 2200 mins	> 560 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25μ	48μ/1.92 mil	< 7 cm	> 2500 mins	> 580 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29μ	50μ/2 mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29μ	55μ/2.2 mil	< 6.5 cm	> 3000 mins	> 600 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 5000 mins	> 850 g/in	> 4.2 kg/cm

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 18mm to 96mm
  - Length: 20mtr to 2000 mtrs
- Jumbo Rolls
  - Width: 740mm to 1320mm
  - Length: 4000mtrs
- Small Jumbo Rolls
  - Width: 144, 240 & 288mm
  - Length: 1500mtrs

## Feature

- Cost Effective
- Long Shelf Life
- Good Tensile Strength
- Ageing Resistant
- Strong OPP Film
- Easy to apply

## Application

- Bonding
- Marketing
- Security Uses
- Heavy Duty Packaging






# EASY TEAR TAPE

Tear Tapes are designed for effortless use, allowing you to cut or tear them by hand without the need for scissors, blades, or cutters. This makes them a practical solution for quick and hassle-free applications.

With no tape dispensers required, these tapes offer convenience and ease of use. They are perfect for packaging, sealing, and everyday tasks where efficiency matters. Their strong adhesion ensures a secure hold while remaining easy to remove.

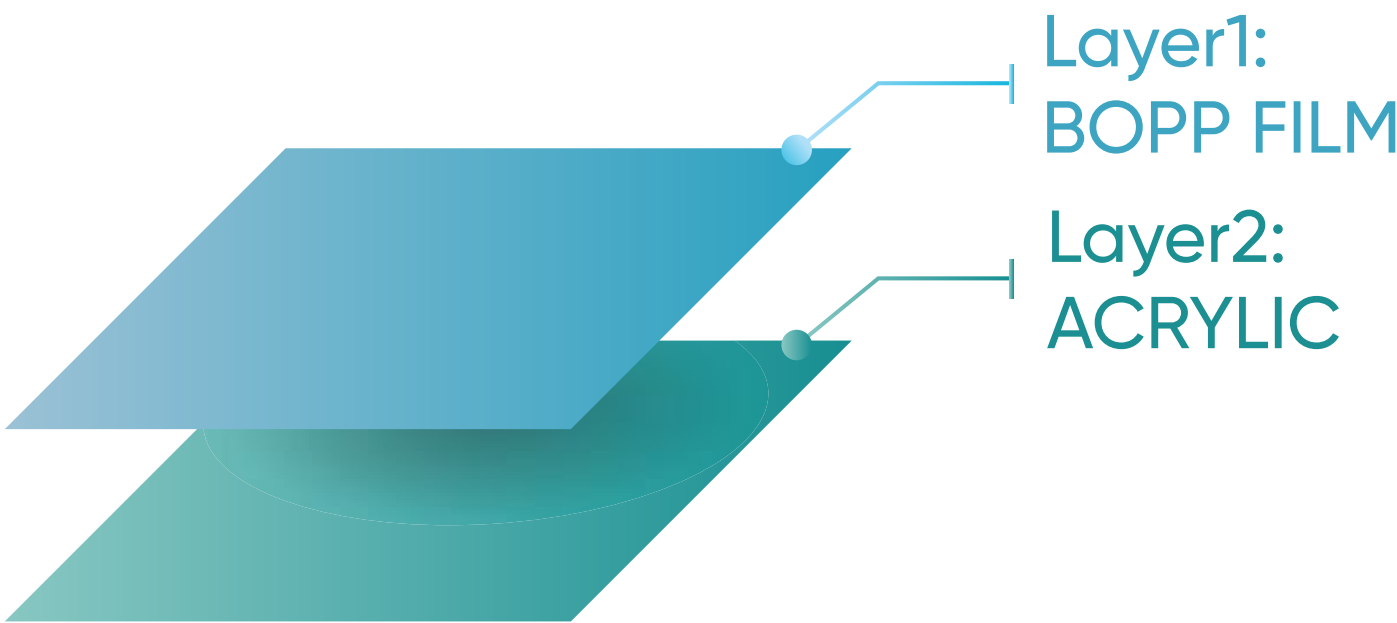

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23μ	36μ/1.44 mil	< 13 cm	> 600 mins	> 380 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23μ	38μ/1.52 mil	< 12 cm	> 1200 mins	> 420 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 12 cm	> 1500 mins	> 440 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23μ	45μ/1.8 mil	< 7.5 cm	> 2200 mins	> 560 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25μ	48μ/1.92 mil	< 7 cm	> 2500 mins	> 580 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29μ	50μ/2 mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29μ	55μ/2.2 mil	< 6.5 cm	> 3000 mins	> 600 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 5000 mins	> 850 g/in	> 4.2 kg/cm

## Variants

- Colors
  - Transparent
  - Brown
  - White
  - Custom Colors
- Slit Material
  - Width: 12mm, 18mm  
19mm & 24mm
  - Length: 5mtr to 100 mtrs

## Feature

- Easy to Tear by Hand
- Long Shelf Life
- Easy to Use
- Easy to Apply

## Application

- Paper Mending
- Smaller Packages






# LOW NOISE TAPE

Low Noise Tapes are engineered to unroll smoothly with consistent force, ensuring minimal noise levels of  $\leq 85\text{dB}$  at a 4-meter distance. This makes them ideal for workplaces where noise reduction is essential.

These tapes are perfect for packing environments that adhere to Occupational Health and Safety standards, including ISO 18001:2015. They help maintain a quieter and more comfortable workspace while ensuring reliable sealing performance.

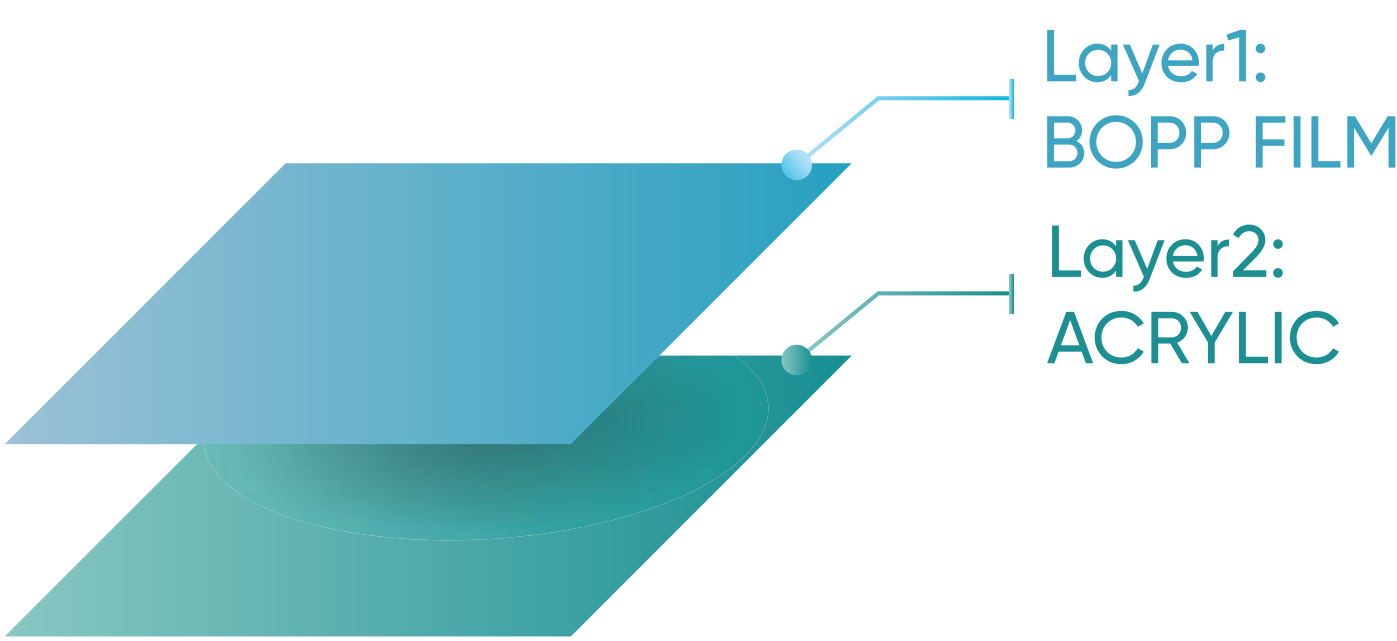

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23μ	36μ/1.44 mil	< 13 cm	> 600 mins	> 380 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23μ	38μ/1.52 mil	< 12 cm	> 1200 mins	> 420 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 12 cm	> 1500 mins	> 440 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23μ	45μ/1.8 mil	< 7.5 cm	> 2200 mins	> 560 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25μ	48μ/1.92 mil	< 7 cm	> 2500 mins	> 580 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29μ	50μ/2 mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29μ	55μ/2.2 mil	< 6.5 cm	> 3000 mins	> 600 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 5000 mins	> 850 g/in	> 4.2 kg/cm

## Variants

- Colors
  - Transparent
  - Brown
  - White
  - Custom Colors
- Slit Material
  - Width: 36mm to 100mm
  - Length: 25mtr to 200 mtrs

## Feature

- Low Unwinding Noise
- Good Shelf Life
- Good Tensile Strength
- Ideal for Multiple Packing Stations

## Application

- Bonding
- Joining
- Sealing
- Heavy Duty Packaging






# NO NOISE TAPE

No Noise Tapes are engineered to unroll smoothly with consistent force, ensuring minimal noise levels of  $\leq 65\text{dB}$  at a 4-meter distance. This makes them ideal for workplaces where noise reduction is essential.

These tapes are perfect for packing environments that adhere to Occupational Health and Safety standards, including ISO 18001:2015. They help maintain a quieter and more comfortable workspace while ensuring reliable sealing performance.

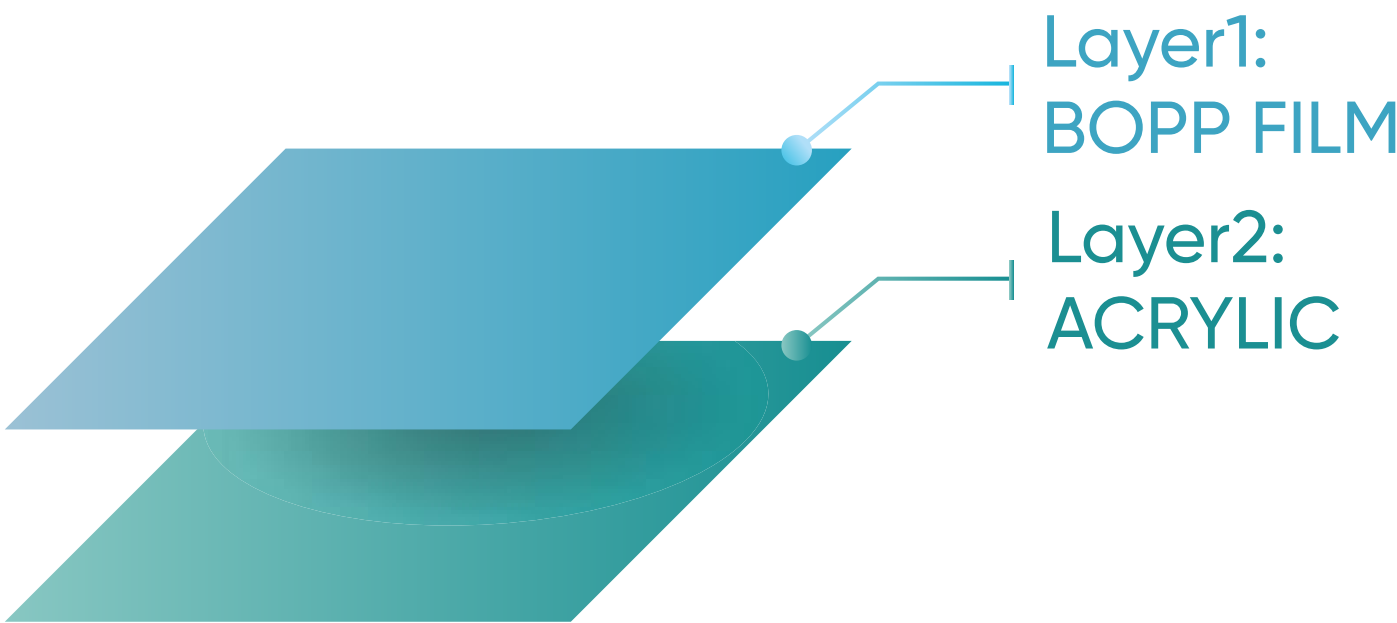

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23μ	36μ/1.44 mil	< 13 cm	> 600 mins	> 380 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23μ	38μ/1.52 mil	< 12 cm	> 1200 mins	> 420 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 12 cm	> 1500 mins	> 440 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23μ	45μ/1.8 mil	< 7.5 cm	> 2200 mins	> 560 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25μ	48μ/1.92 mil	< 7 cm	> 2500 mins	> 580 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29μ	50μ/2 mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29μ	55μ/2.2 mil	< 6.5 cm	> 3000 mins	> 600 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 5000 mins	> 850 g/in	> 4.2 kg/cm

## Variants

- Colors
  - Transparent
  - Brown
  - White
  - Custom Colors
- Slit Material
  - Width: 36mm to 144mm
  - Length: 25mtr to 200 mtrs

## Feature

- No Unwinding Noise
- Easy to Unwind
- Long Shelf Life
- Good Tensile Strength
- Ideal for Multiple Packing Stations

## Application

- Bonding
- Joining
- Sealing
- Heavy Duty Packaging






# MACHINE ROLL

Modified Acrylic Adhesive Machine Tapes are designed for high-speed auto-taping machines, ensuring smooth, efficient application. They serve as a reliable alternative to Hot-Melt OPP Tapes, offering strong adhesion and durability.

Additionally, Machine Rolls can be customized for packaging, printed designs, high shear strength, and freeze-grade applications. These versatile options provide tailored solutions for diverse industrial and commercial needs.

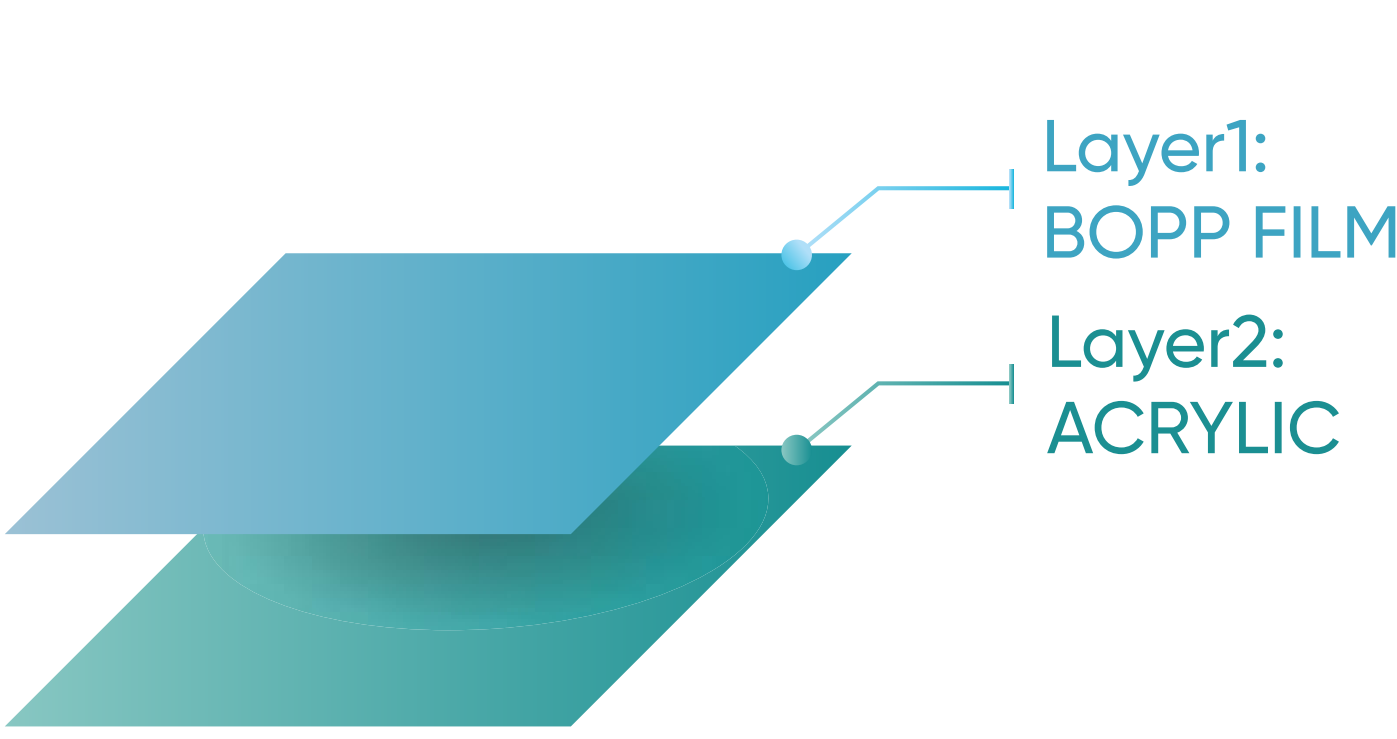

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23μ	36μ/1.44 mil	< 13 cm	> 600 mins	> 380 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23μ	38μ/1.52 mil	< 12 cm	> 1200 mins	> 420 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 12 cm	> 1500 mins	> 440 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23μ	45μ/1.8 mil	< 7.5 cm	> 2200 mins	> 560 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25μ	48μ/1.92 mil	< 7 cm	> 2500 mins	> 580 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29μ	50μ/2 mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29μ	55μ/2.2 mil	< 6.5 cm	> 3000 mins	> 600 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 5000 mins	> 850 g/in	> 4.2 kg/cm

## Variants

- Colors
  - Transparent
  - Brown
  - White
  - Custom Colors
- Slit Material
  - Width: 30mm to 144mm
  - Length: 650mtr to 2000mtrs

## Feature

- Residue Free Operations
- Long Shelf Life
- High Tensile Strength
- High Speed Machine Operations

## Application

- Bonding
- Joining
- Sealing
- Automatic Packaging






# HIGH SHEAR TAPE

High Shear Tapes are designed for secure packaging applications, ensuring durability and strength. These tapes provide superior adhesion, making them ideal for sealing packages that require extra reinforcement.

They are particularly suitable for packing heavy-duty or high-strength kraft paper boxes. Their strong bonding capability helps maintain the integrity of the package, preventing damage during transit or storage.

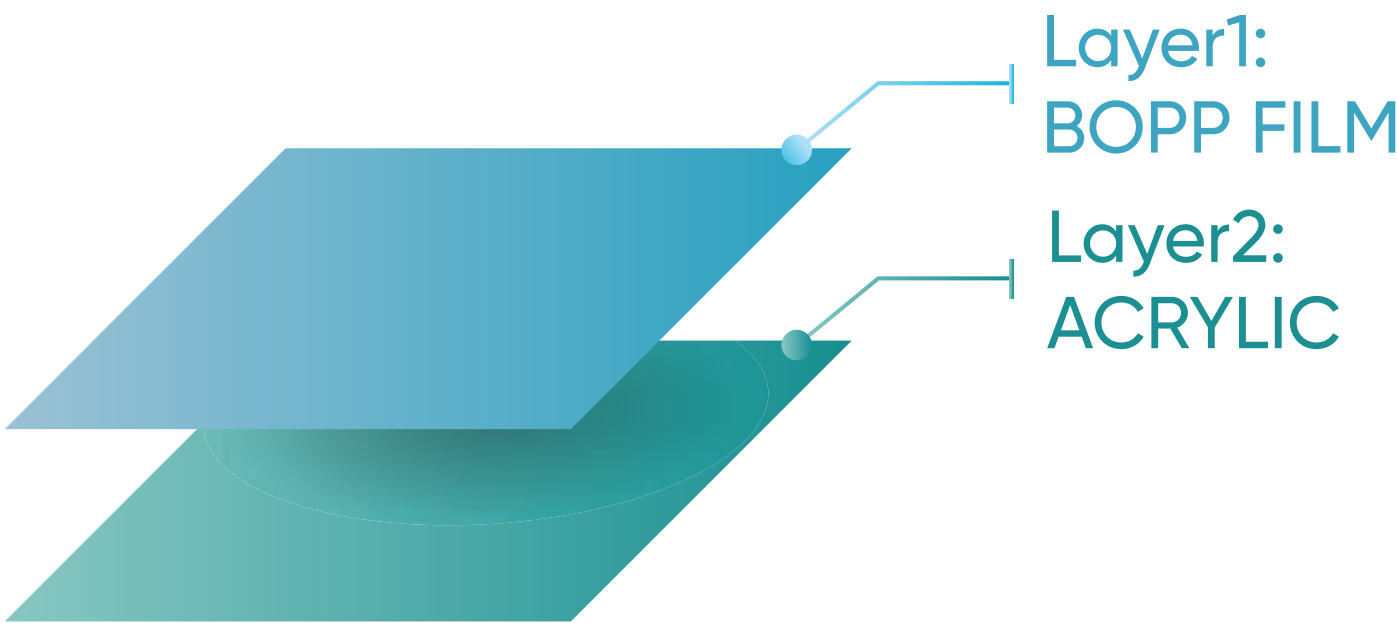

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SABOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 10 cm	> 3000 mins	> 400 g/in	> 3.2 kg/in
SABOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 10 cm	> 5000 mins	> 450 g/in	> 3.2 kg/in
SABOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 8 cm	> 5000 mins	> 450 g/in	> 3.4 kg/in
SABOPP2921	BOPP Film	29μ	50μ/2 mil	< 8 cm	> 5000 mins	> 450 g/in	> 3.6 kg/in

## Feature

- Strong Adhesive
- Long Shelf Life
- Superior Tensile Strength
- Easy to Apply on Variety of Surfaces

## Variants

- Colors
  - Transparent
  - Brown
  - White
  - Custom Colors
- Slit Material
  - Width: 36mm to 144mm
  - Length: 25mtr to 2000mtrs
- Jumbo Rolls
  - Width: 1025mm to 1610mm
  - Length: Upto 8000mtrs

## Application

- Bonding
- Joining
- Sealing
- Heavy Duty Packaging






# HOT MELT TAPE

Hot Melt BOPP Tapes are known for their aggressive tack and peel strength, making them highly effective for secure sealing. Their strong adhesive properties ensure firm bonding, even under demanding conditions.

Additionally, these tapes possess high-shear properties, enhancing their durability and performance. They are particularly well-suited for high-speed automatic taping machines, ensuring efficient and reliable packaging operations.

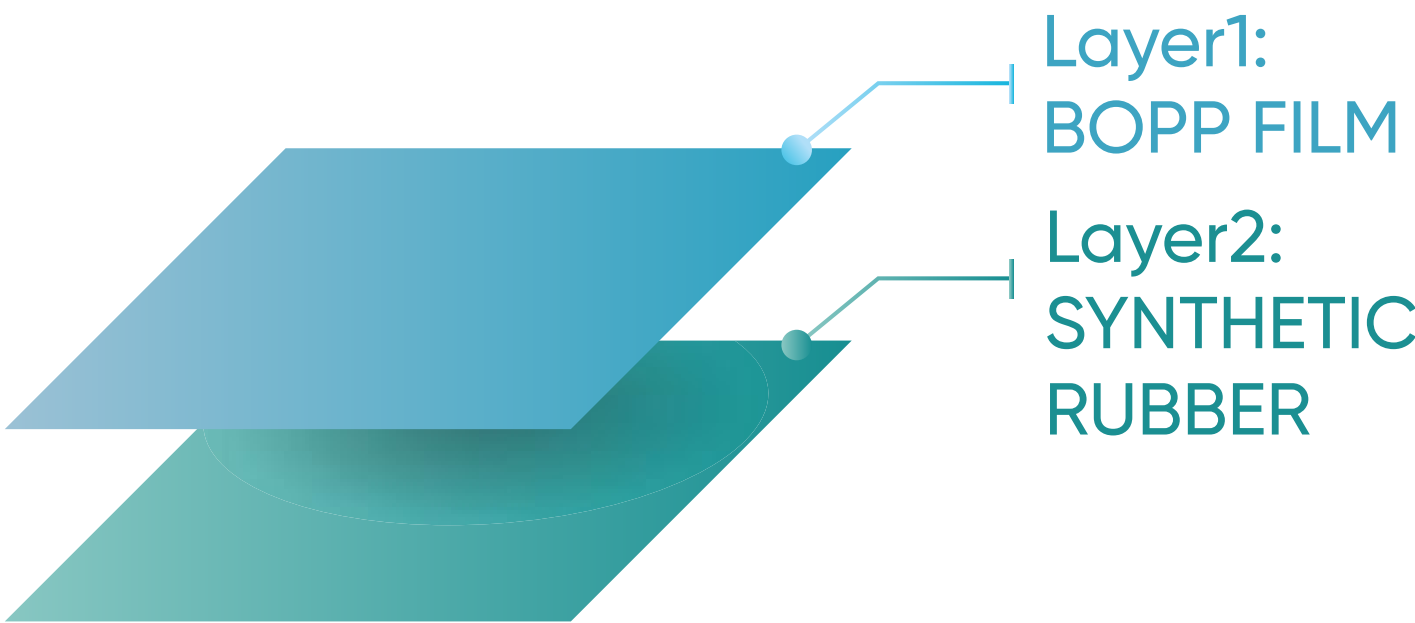

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
HMOPP2518	BOPP Film	25μ	45μ/1.8 mil	< 7cm	> 5000 mins	> 800 g/in	> 3.1 kg/in

## Feature

- Strong OPP Film
- Easy to Apply on Variety of Surfaces
- Clear Adhesive with High Tack, Peel & Shear

## Variants

- Colors
  - Transparent
  - Brown
  - White
  - Custom Colors
- Slit Material
  - Width: 24mm to 144mm
  - Length: 25mtr to 2000mtrs
- Jumbo Rolls
  - Width: Upto 1610mm
  - Length: Upto 4000mtrs

## Application

- Bonding
- Joining
- Sealing
- Heavy Duty Packaging






# INVISIBLE TAPE

Invisible tapes feature a smooth, matte finish that allows them to blend seamlessly with paper surfaces. Their discreet appearance makes them ideal for applications where a clean and professional look is required.

These tapes provide strong adhesion while remaining nearly invisible, making them perfect for office work, document repairs, and gift wrapping. Their non-reflective surface ensures a neat and polished finish.

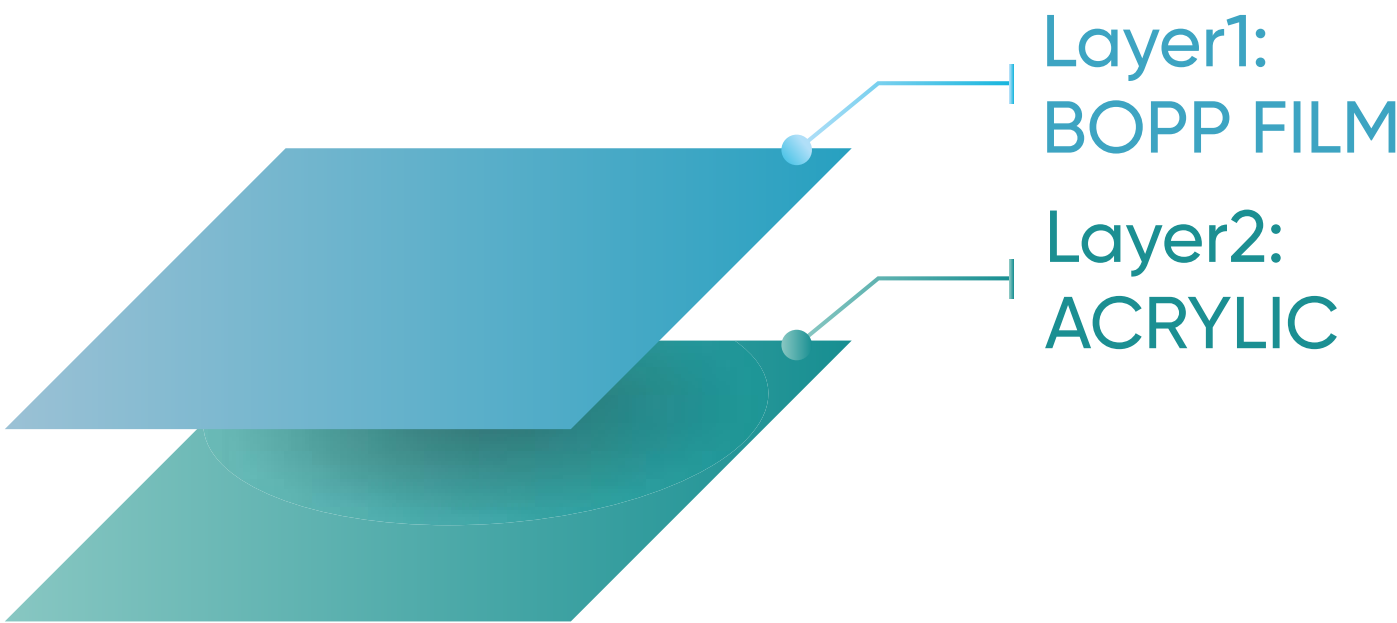

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SABOPP2515	BOPP Film	25μ	40μ/1.6 mil	< 8.5 cm	> 700 mins	> 450 g/in	> 3.2 kg/cm

## Feature

- Smooth Finish & Writable
- Invisible/Low Visibility when Stuck on Paper
- Leaves No Marks during Photocopy
- Invisible under Photocopy/Scanners

## Variants

- Colors
  - Matt White
- Slit Material
  - Width: 12mm to 100mm
  - Length: 25mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 980mm
  - Length: Upto 4000mtrs

## Application

- Mending
- Labeling
- Sealing
- Gift Packing






# METALLIZED TAPE

Metallized BOPP Tapes are a good alternative to Aluminum Foil Tapes. They offer low vapor permeability, making them effective in preventing moisture penetration. These tapes are lightweight yet durable, ensuring long-lasting performance in demanding conditions.

Additionally, these tapes provide a strong barrier against UV rays, water, and other environmental elements. This makes them ideal for various industrial and packaging applications.

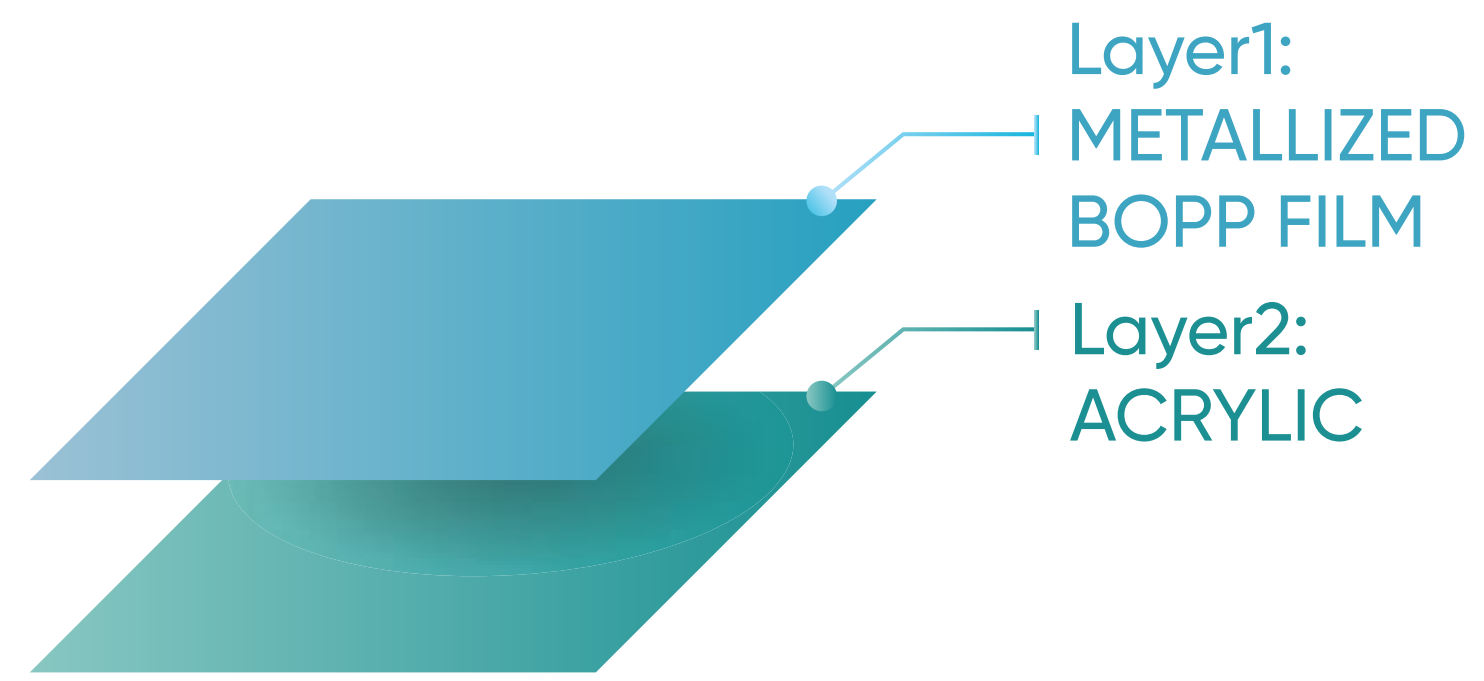

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
MPP25	BOPP Film	25μ	45μ/1.8 mil	< 10 cm	> 5000 mins	> 400 g/in	> 3.4 kg/cm
MPP28	BOPP Film	28μ	55μ/2.2 mil	< 8 cm	> 5000 mins	> 400 g/in	> 3.6 kg/cm

## Feature

- High Reflectivity of Light
- High Barrier Properties
- Cost Effective
- Good Tensile Strength

## Variants

- Colors
  - Silver
- Slit Material
  - Width: 12mm to 75mm
  - Length: 20mtr to 100mtrs
- Jumbo Rolls
  - Width: 1025mm to 1315mm
  - Length: Upto 4000mtrs

## Application

- Bonding
- Packaging
- Sealing
- High Barrier HVAC Tape






# WATER RESISTANT TAPE

Water Resistant Tapes are made from a highly specialized grade of acrylic adhesive, these tapes ensure strong and reliable adhesion. Their advanced formulation enhances durability and long-term performance.

These tapes do not experience adhesion failure even when exposed to high levels of moisture and humidity. Due to this property, they are commonly referred to as Sheathing Tape and are widely used in construction and insulation applications.

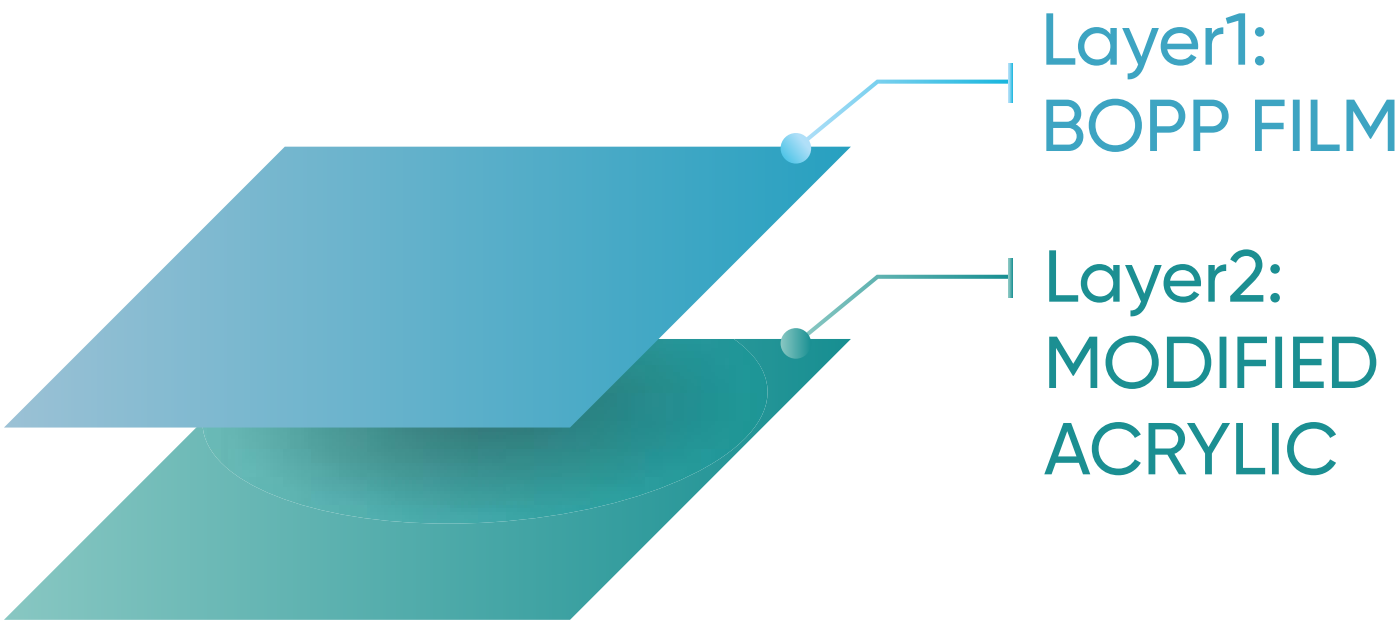

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SAWRBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 7 cm	> 1600 mins	> 720 g/in	> 2.8 kg/cm

## Feature

- Strong Base Film
- Long Shelf Life
- Excellent Tensile Strength
- Water Resistant Adhesive Formulation

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 36mm to 100mm
  - Length: 25mtr to 200mtrs
- Jumbo Rolls
  - Width: 1025mm to 1315mm
  - Length: Upto 4000mtrs

## Application

- Bonding
- Joining
- Sealing
- Heavy Duty Packaging






# FREEZER TAPE

Freezer Tape can withstand temperatures as low as -20°C, making it ideal for cold storage applications. Made from a specialized grade of acrylic adhesive, it is designed to maintain strong adhesion even in extremely low temperatures.

This tape serves as a reliable replacement for traditional rubber solvent packaging tapes. Its durability and resistance to freezing conditions make it a preferred choice for industries requiring secure packaging in cold environments.

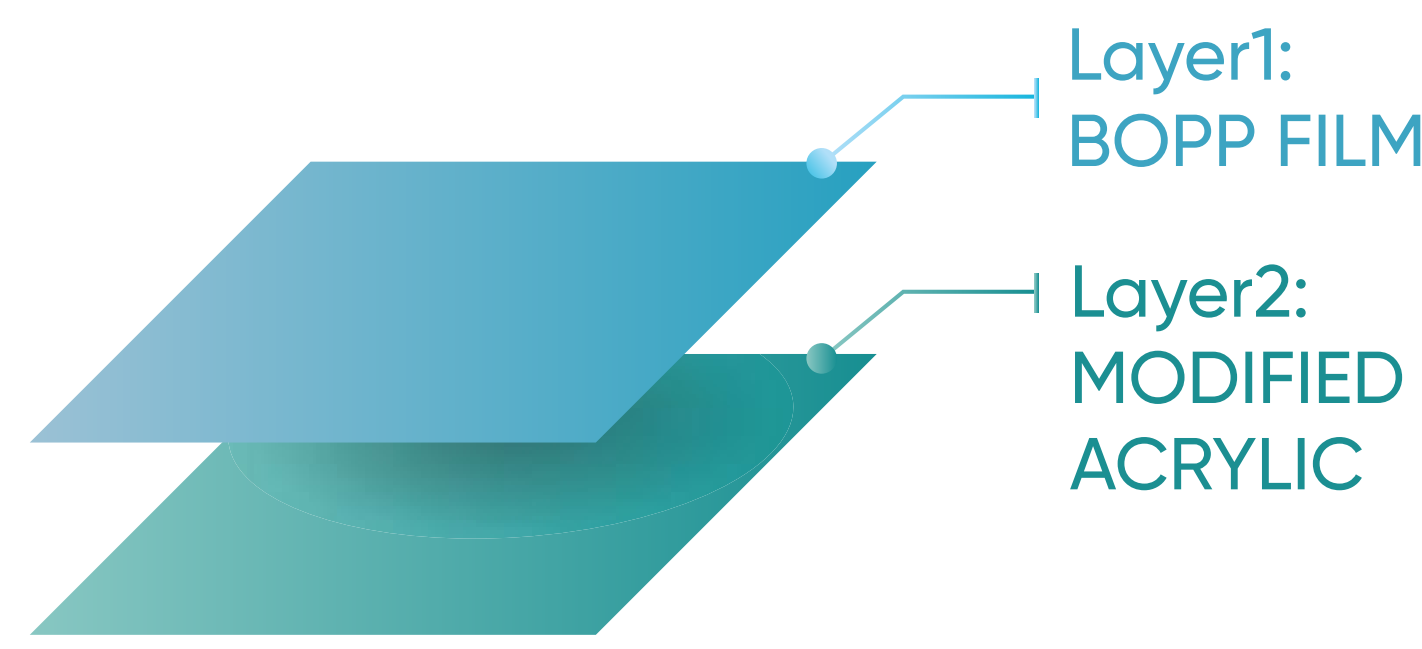

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SABOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 8.5 cm	> 2200 mins	> 520 g/in	> 3.2 kg/in
SABOPP2525	BOPP Film	25μ	50μ/2 mil	< 8 cm	> 3000 mins	> 600 g/in	> 3.2 kg/in
SABOPP2926	BOPP Film	29μ	55μ/2.2 mil	< 7.5 cm	> 3200 mins	> 600 g/in	> 3.4 kg/in

## Feature

- Strong Adhesive with High Tack, Peel & Shear
- Long Shelf Life
- Service Temperatures are -20°C to +60°C
- Application Temperatures are +5°C to +40°C

## Variants

- Colors
  - Transparent
  - Brown
  - Blue
  - Custom Colors
- Slit Material
  - Width: 24mm to 144mm
  - Length: 25mtr to 1000mtrs
- Jumbo Rolls
  - Width: 1025mm to 1610mm
  - Length: Upto 8000mtrs

## Application

- Bonding
- Heavy Duty Packaging






# DOUBLE SIDED TAPE

Double-Sided BOPP Tapes are used for light to medium-duty splicing and mounting applications. These tapes provide strong adhesion, making them ideal for various industrial and commercial uses. They offer durability and reliable performance, ensuring a secure bond in demanding conditions.

We also provide custom peel and shear options for both surfaces to meet specific application needs. Our tailored solutions ensure optimal performance based on different material requirements.

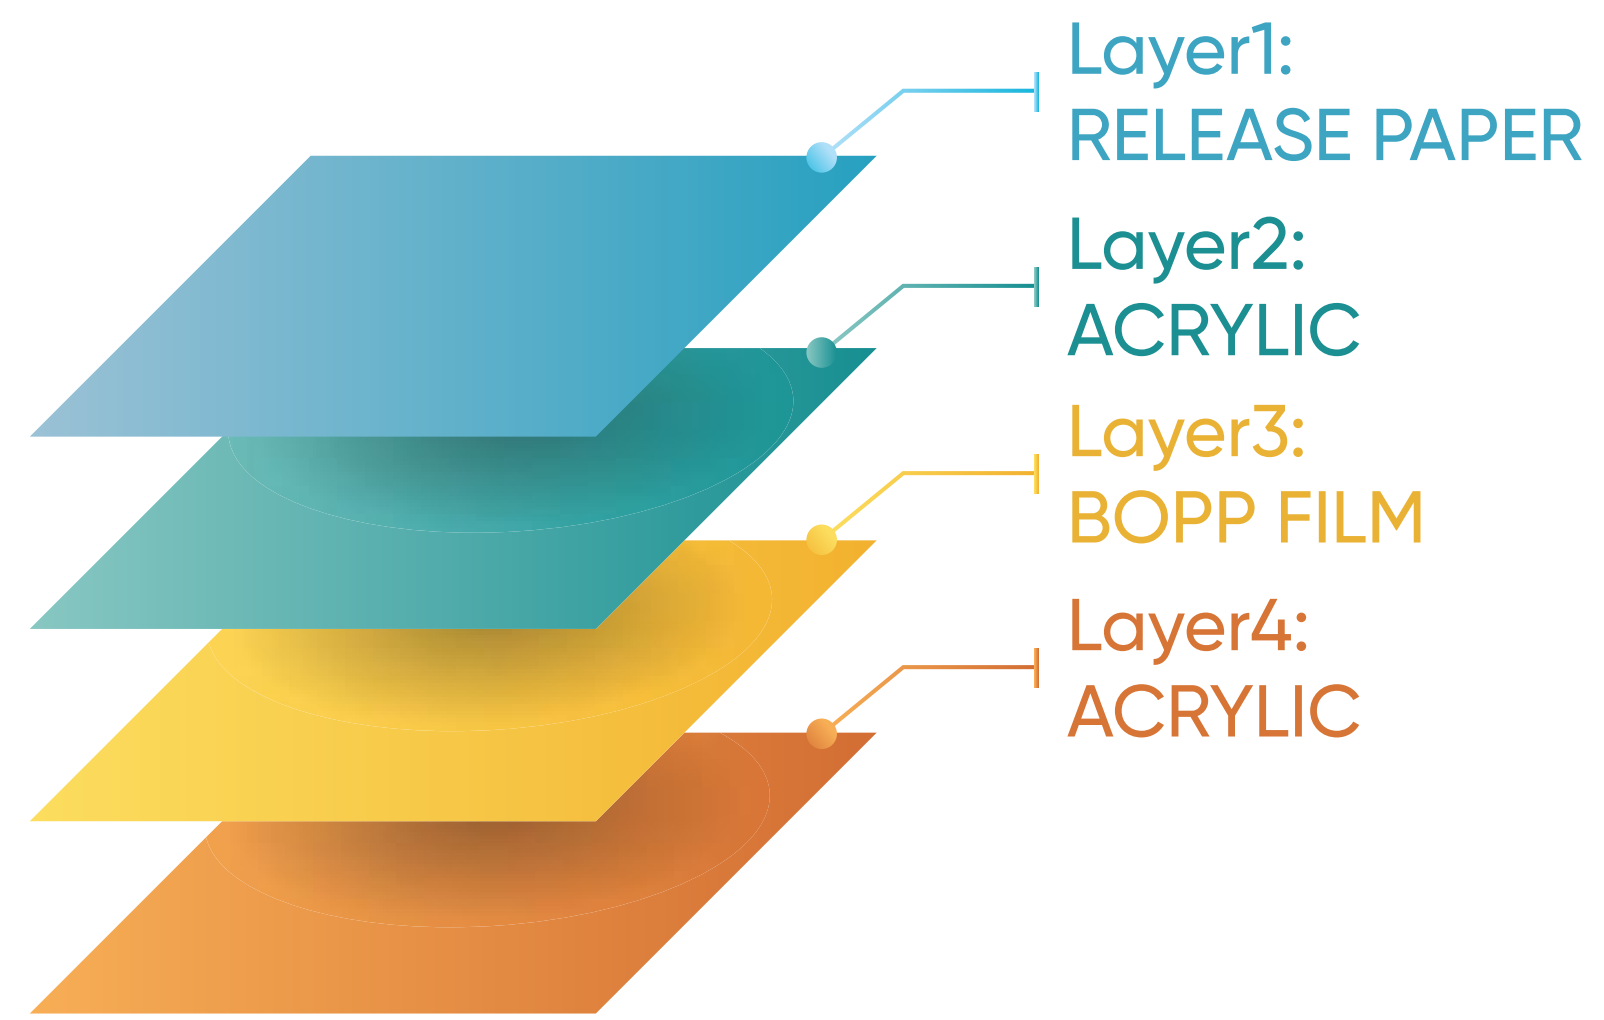

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
DSOPP252424	BOPP Film	25μ	75μ/3 mil	< 7.8 cm	> 2000 mins	> 580 g/in	> 3.4 kg/cm

## Feature

- High Tack & Peel Adhesive
- Strong Base Film
- Long Shelf Life
- Excellent Tensile Strength
- Permanent Bonding (Non-Removable)

## Variants

- Colors
  - White
- Slit Material
  - Width: 36mm to 100mm
  - Length: 25mtr to 2000mtrs
- Jumbo Rolls
  - Width: 1025mm to 1315mm
  - Length: Upto 4000mtrs

## Application


- Splicing
- Mounting



# SELF STRIP TAPE

Double-Sided BOPP Tapes are used for light to medium-duty splicing and mounting applications. These tapes provide strong adhesion, making them ideal for various industrial and commercial uses. They offer durability and reliable performance, ensuring a secure bond in demanding conditions.

We also provide custom peel and shear options for both surfaces to meet specific application needs. Our tailored solutions ensure optimal performance based on different material requirements.

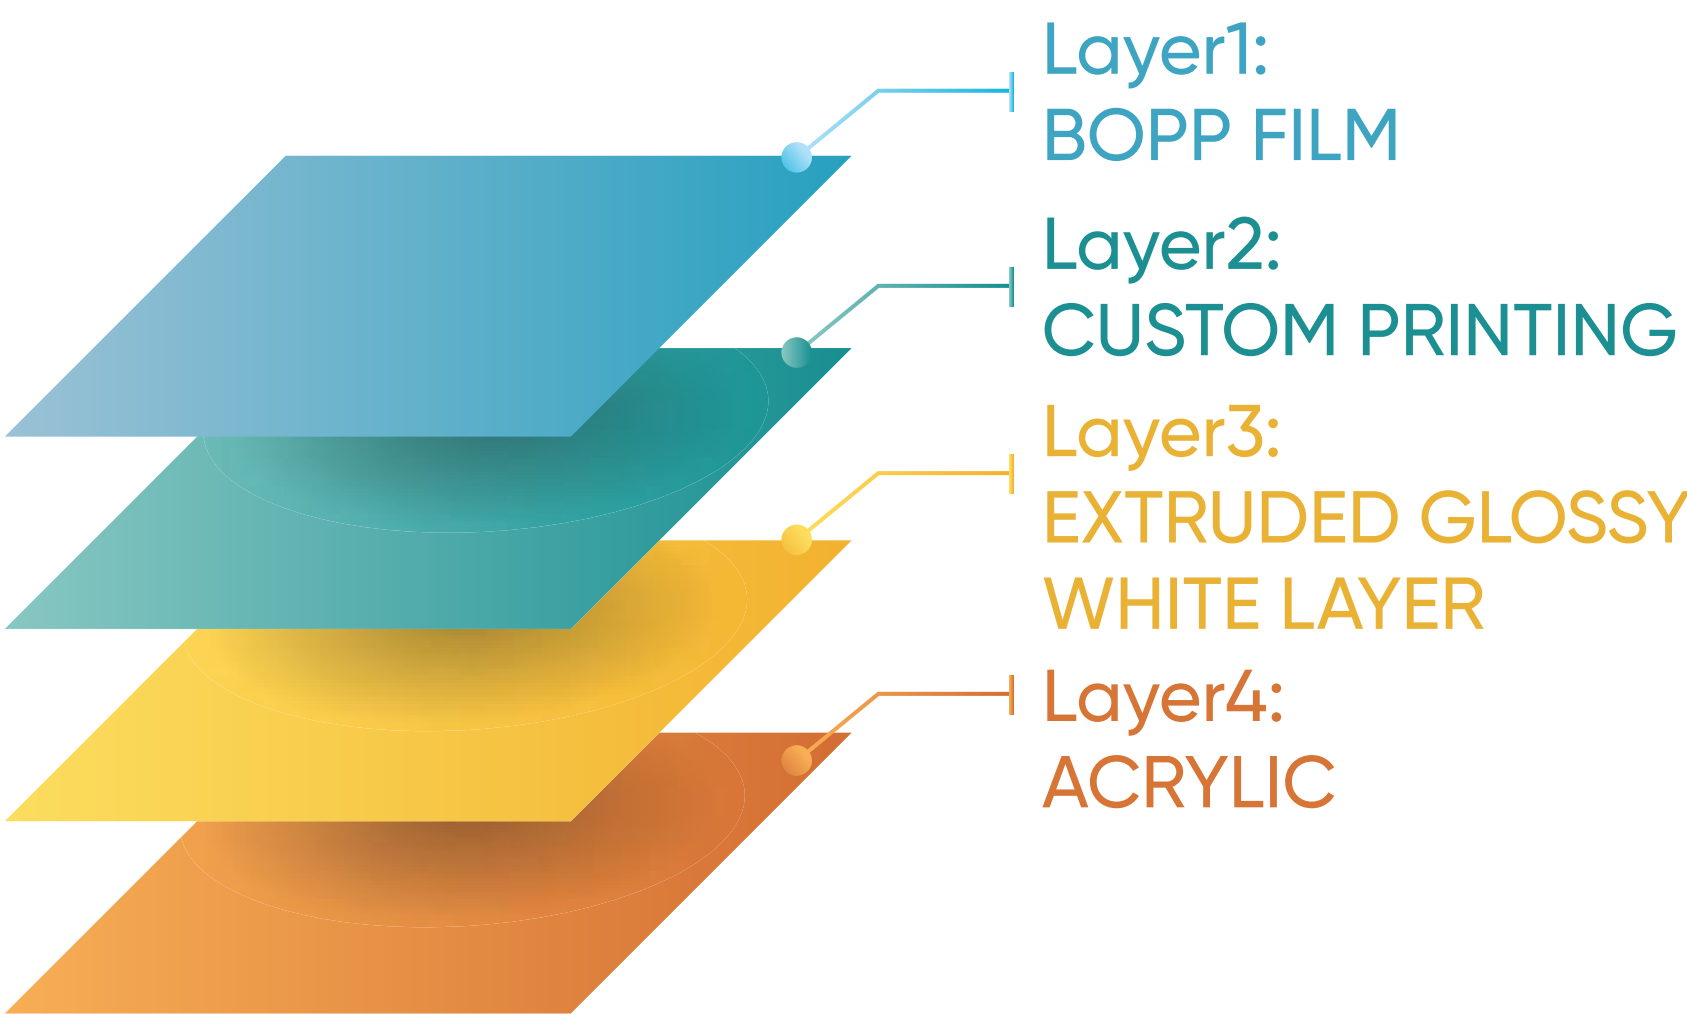

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SST23	BOPP Film	23μ	60μ/2.4 mil	< 12 cm	> 1200 mins	> 440 g/in	> 2.8 kg/cm
SST37	BOPP Film	37μ	75μ/3 mil	< 8 cm	> 1200 mins	> 480 g/in	> 4.2 kg/cm

## Feature

- High Glossy Finish
- Excellent Opacity
- Superb Visibility of Printing
- Excellent Tensile Strength
- Premium Brand Look

## Variants

- Colors
  - Custom Colors
- Slit Material
  - Width: 24mm to 100mm
  - Length: 25mtr to 200mtrs
- Jumbo Rolls
  - Width: Upto 980mm
  - Length: Upto 4000mtrs

## Application

- Branding
- Packaging






# NON-ADHESIVE TAPE

These are branding tapes with no adhesive, used for bundling soft fabrics. They provide a practical and efficient solution for securely bundling delicate materials without leaving any residue or causing damage.

These tapes are available in clear, coloured films, and custom-printed options, offering versatility to suit different branding and packaging needs. They are designed to enhance product presentation while maintaining functionality and durability.

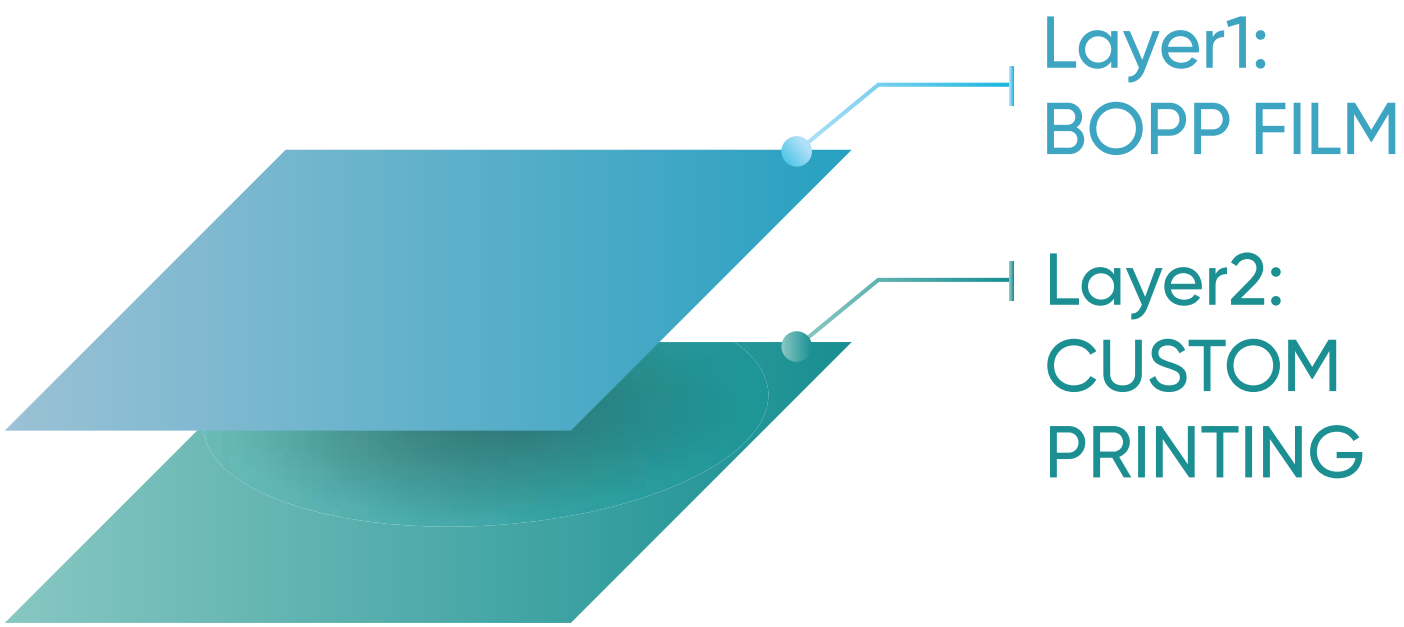

## Performance

Product Code	Backing	Backing Thickness
NABOPP23	BOPP Film	23µ/0.92 mil
NABOPP25	BOPP Film	25µ/1 mil
NABOPP29	BOPP Film	29µ/1.16 mil
NABOPP37	BOPP Film	37µ/1.48 mil

## Feature

- Strong Base Film
- Excellent Tensile Strength
- Long Self Life
- Cost Effective

## Variants

- Colors
  - Custom Printing & Colors
- Slit Material
  - Width: 24mm to 100mm
  - Length: 25mtr to 200mtrs
- Jumbo Rolls
  - Width: 1025mm to 1315mm
  - Length: Upto 4000mtrs

## Application


- Branding
- Bundling



# HOLO-GRAPHIC TAPE

Custom holograms offer enhanced security as they are difficult to duplicate, ensuring that your original product remains protected from replication. This added layer of security helps maintain brand authenticity and protects against counterfeiting.

Holograms are also used in stationery for arts, crafts, and decorative purposes. They add a unique visual appeal, making them ideal for creative projects, personalized gifts, and decorative packaging.

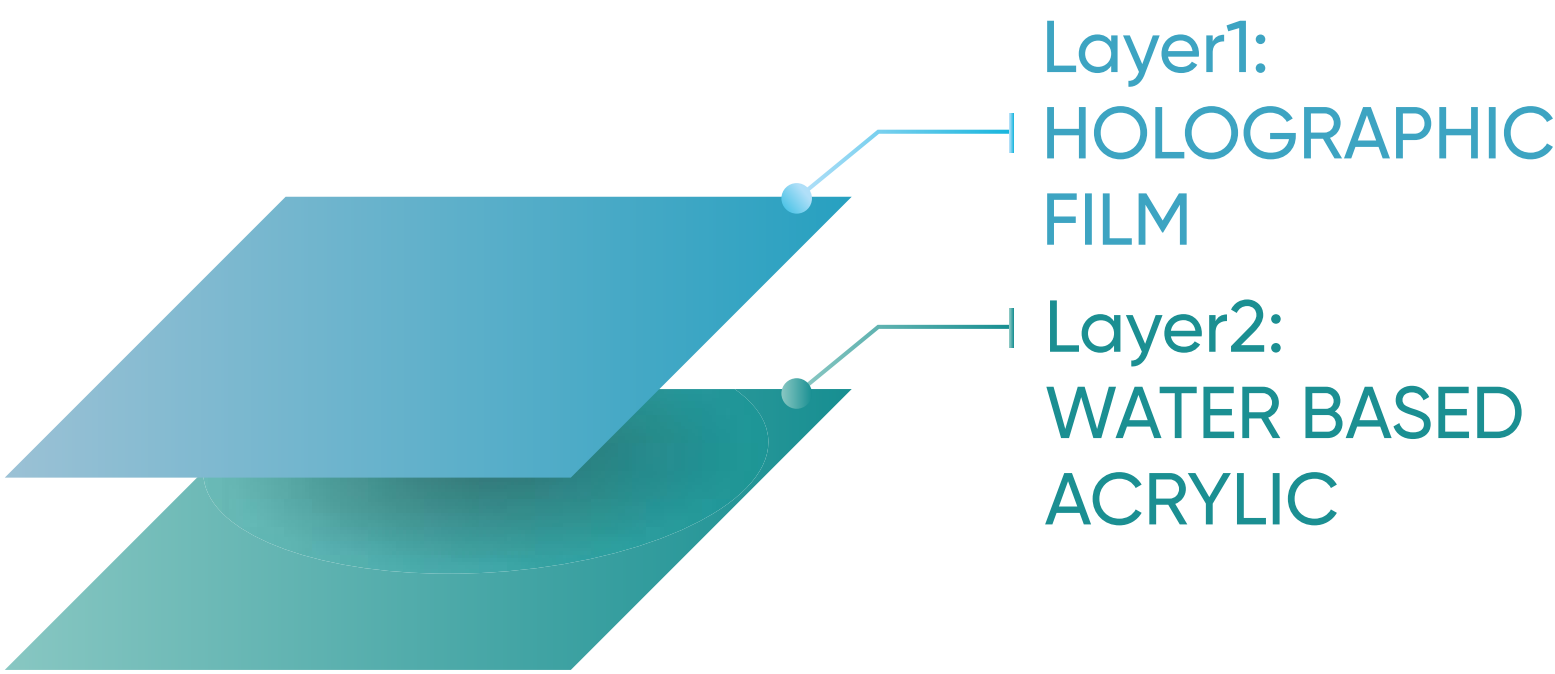

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
HOLO23	HOLO Film	23μ	38μ/1.52 mil	< 12 cm	> 400 mins	> 420 g/in	> 2.8 kg/cm

## Feature

- High Reflectivity
- Impossible to Duplicate
- Intricate & Detailed Patterns

## Variants

- Colors
  - Blue / Pink / Gold / Green / Silver / Red
- Slit Material
  - Width: 12mm to 100mm
  - Length: 25mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 1024mm
  - Length: Upto 2000mtrs

## Application

- Art & Crafts
- DIY Applications
- High Security Packaging






# NECK SEALING TAPE

Neck or bag sealing tape is commonly used in grocery stores to seal bags of meat, fruit, vegetables, and bread. It provides a convenient and efficient way to keep food items fresh and secure during storage and transportation.

This tape serves as a modern replacement for traditional bag sealing tapes. It offers improved durability and ease of use, making it a practical choice for various packaging needs in retail and food industries.

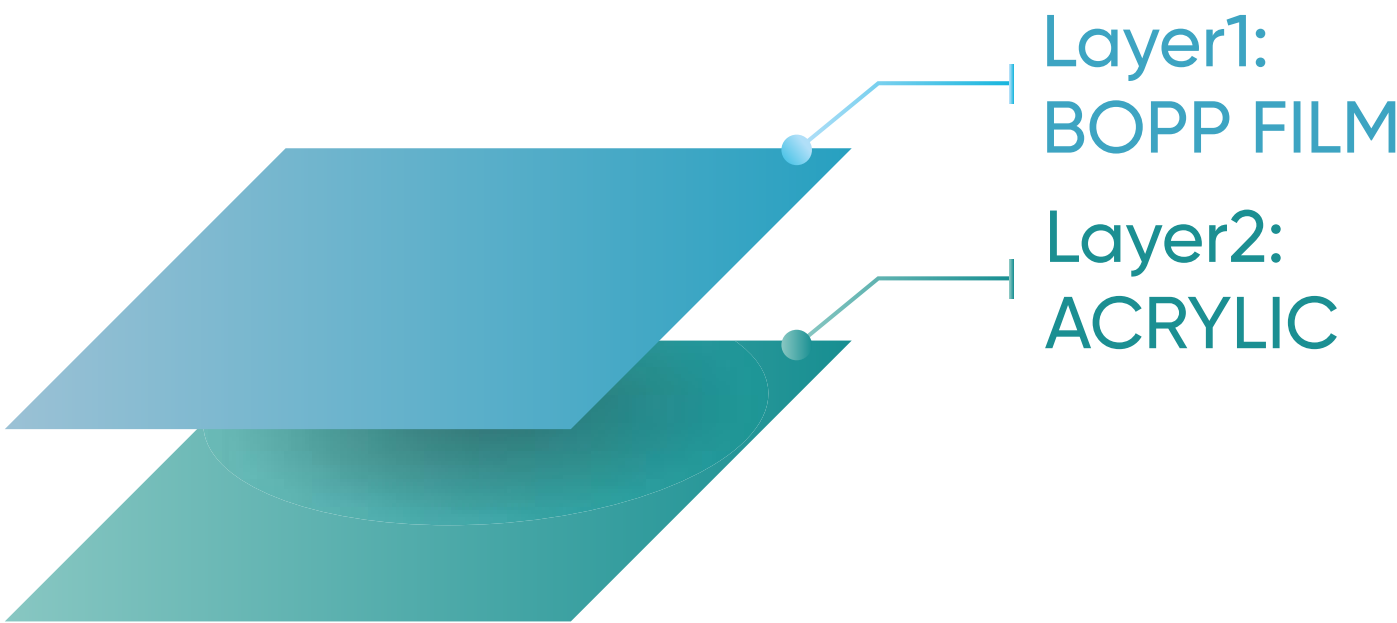

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
SATBOPPNST3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 750 g/in	> 3.8 kg/in	100%

## Feature

- PVC Free
- High Strength OPP Film
- Cost Effective
- Colored Tape with High Tack, Peel & Shear
- Moisture Resistant

## Variants

- Colors
  - Blue / White / Red / Green / Yellow
  - Custom Colors
- Slit Material
  - Width: 8mm to 24mm
  - Length: 50mtr to 66mtrs

## Application


- Bonding
- Joining
- Bag Sealing
- Light Duty Packaging



# COLD LAMINATION FILM

Self-adhesive lamination film is designed for high-speed label printing presses, offering a reliable solution to enhance durability and appearance. It ensures smooth application and maintains print quality during production.

These films provide protection from water and contaminants, preserving the integrity of labels. They are ideal for industries that need long-lasting, high-quality labels for packaging and branding.

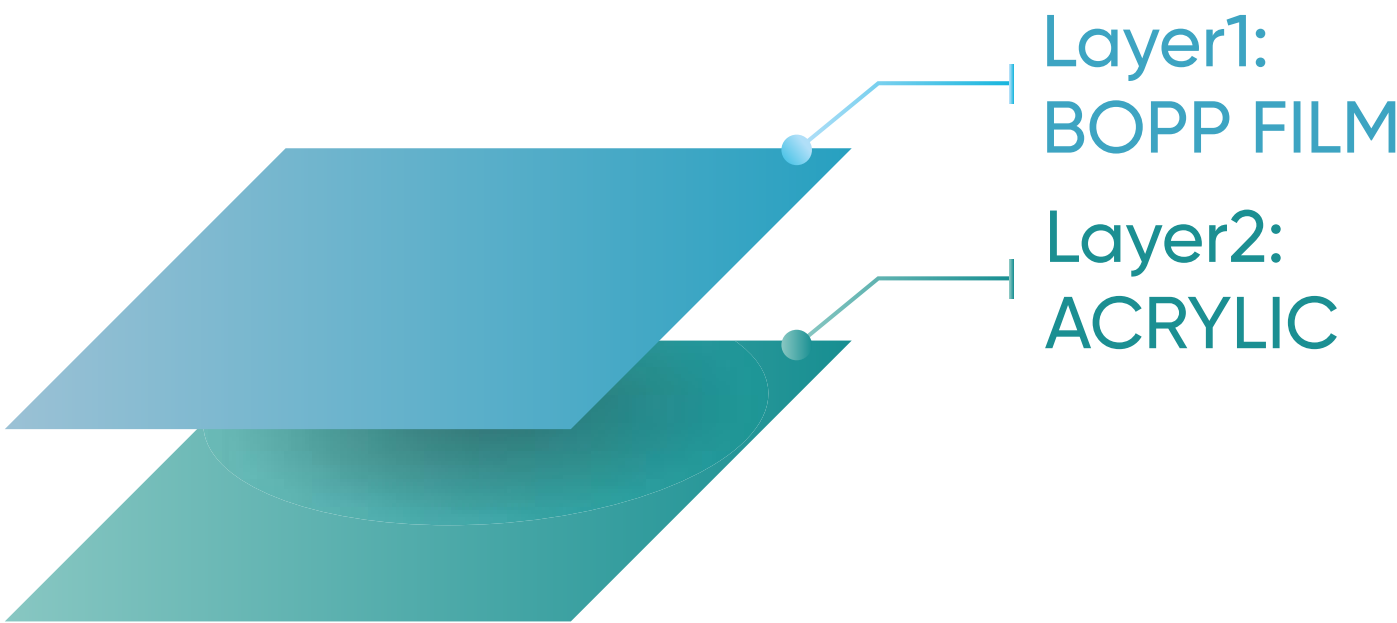

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
LAMIOPP2508	BOPP Film	25μ	33μ/1.32 mil	< 11 cm	> 250 g/in	> 3.4 kg/in	100%

## Feature

- Provides Protection from Water & Other Contaminants
- Available in both Glossy & Matte Finish

## Variants

- Colors
  - Transparent
- Slit Material
  - Width: 100mm to 1024mm
  - Length: 1000mtrs

## Application

- Advertising Materials
- Security Labels
- Book Covers
- Packaging






# POLYOLEFIN SHRINK FILM

POF shrink film is a durable, flexible packaging material with high clarity. It is widely used for food, cosmetics, and consumer goods due to its protective properties. The film shrinks tightly when heated, ensuring a secure finish.

Its strong seal and puncture resistance make it ideal for delicate or irregularly shaped items. Additionally, POF shrink film is lightweight and eco-friendly, helping reduce packaging waste while maintaining product integrity.

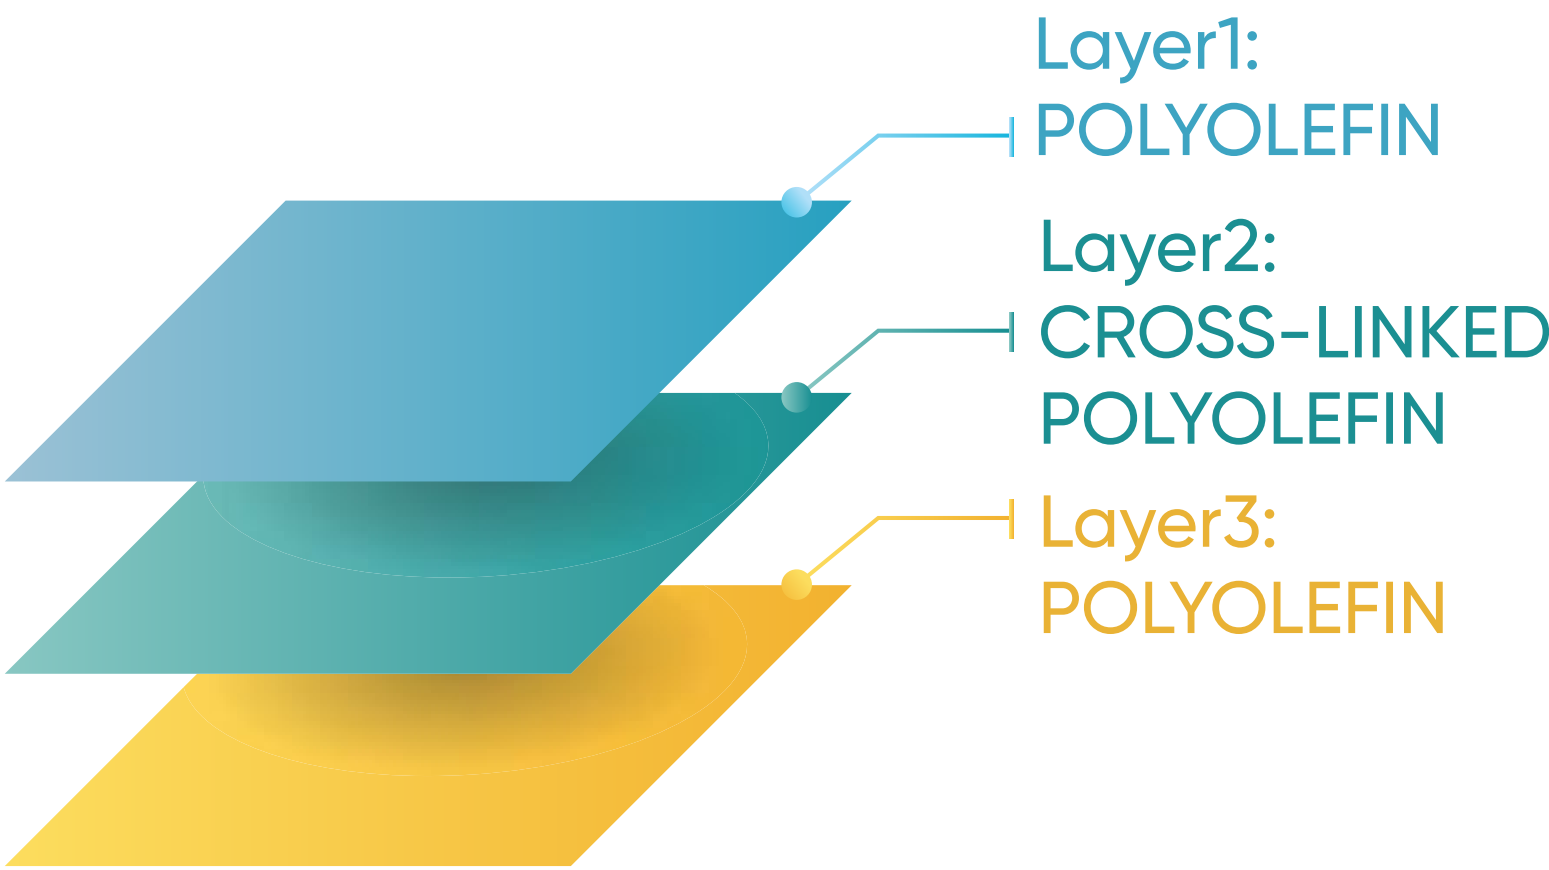

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
POFSHRINK	Polyolefin	20μ	25μ / 1 mil	< 10 cm	> 300 g/in	> 4.0 kg/in	120%

## Feature

- Strong Seal And Puncture Resistance
- Excellent Clarity And Gloss
- FDA-Approved For Food Packaging

## Variants

- Colors
  - Transparent
- Slit Material
  - Width: 100mm to 1024mm
  - Length: 1000mtrs

## Application


- Retail Product Wrapping
- Food Packaging
- Multipack Bundling
- Stationery Packaging



# PVC SHRINK FILM

PVC shrink film is widely used for lightweight packaging applications due to its versatility and affordability. It is commonly found in industries requiring secure and professional packaging solutions.

One of its key uses includes tamper-evident seals, ensuring product safety and integrity. Additionally, PVC shrink film is popular for shrink sleeves, providing a smooth and attractive finish for various consumer goods.

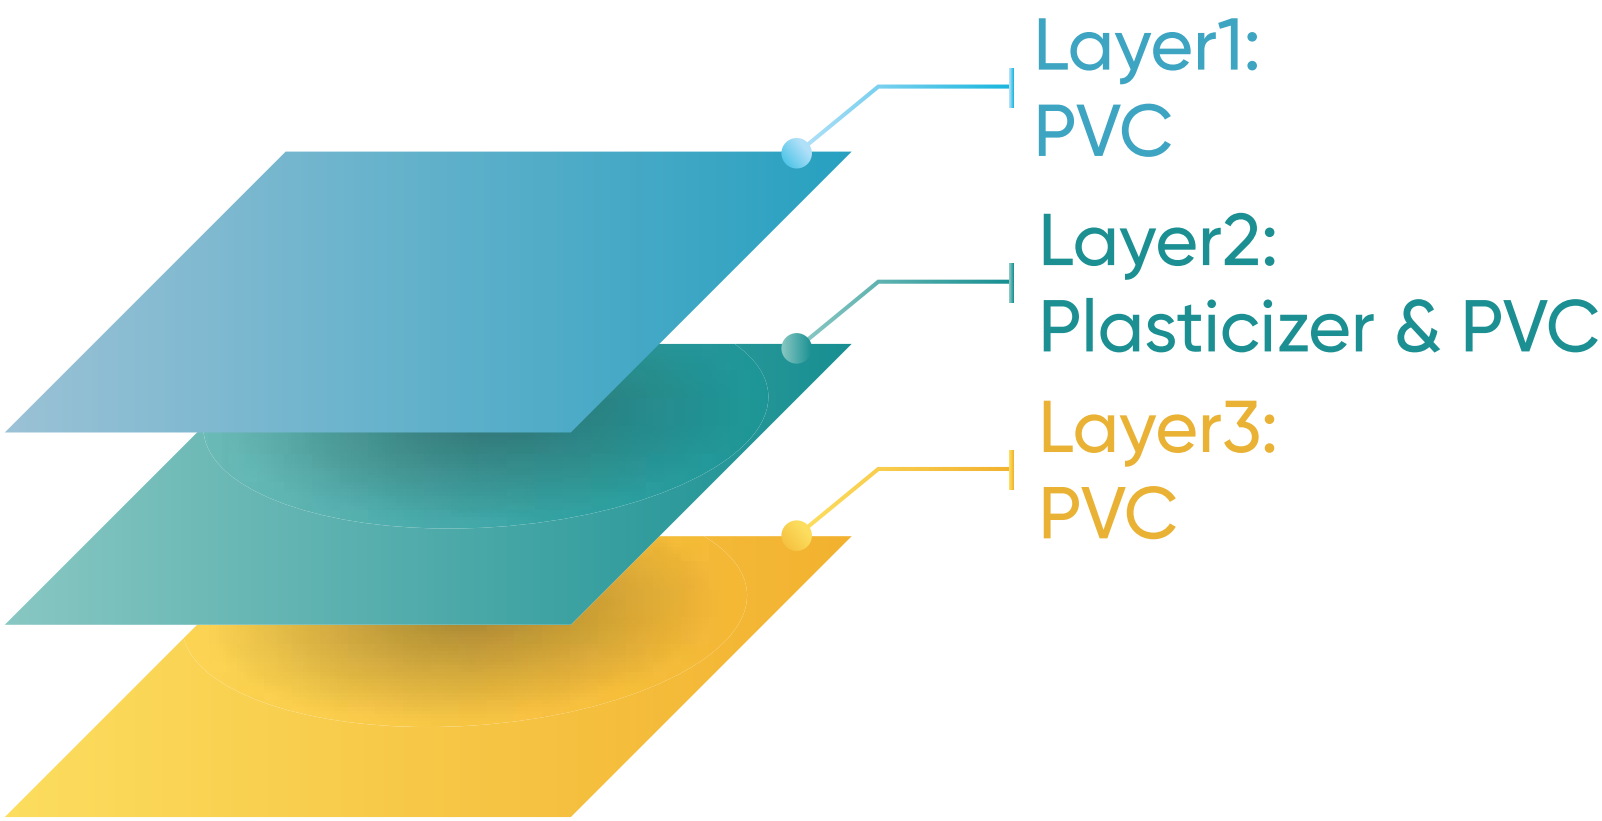

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
PVC SHRINK	PVC Film	15μ	20μ/0.8 mil	< 8 cm	> 200 g/in	> 2.5 kg/in	90%

## Feature

- Affordable and Easy to Shrink
- Good Clarity And Gloss
- Tamper-Evident Protection

## Variants

- Colors
  - Transparent
  - White
- Slit Material
  - Width: 100mm to 1024mm
  - Length: 1000mtrs

## Application

- Tamper-Evident Seals
- Retail Packaging
- Electronics Wrapping
- Shrink Sleeves for Bottles






# POLYETHYLENE SHRINK FILM

PE shrink film is a thick, durable, and highly resilient packaging material designed for heavy-duty applications. Its exceptional strength makes it ideal for securing large or bulky items, ensuring stability and protection during transport.

Commonly used for bundling beverage packs, industrial goods, and heavy consumer products, PE shrink film provides excellent load protection. Its flexibility, tear resistance, and weatherproof properties make it a reliable choice.

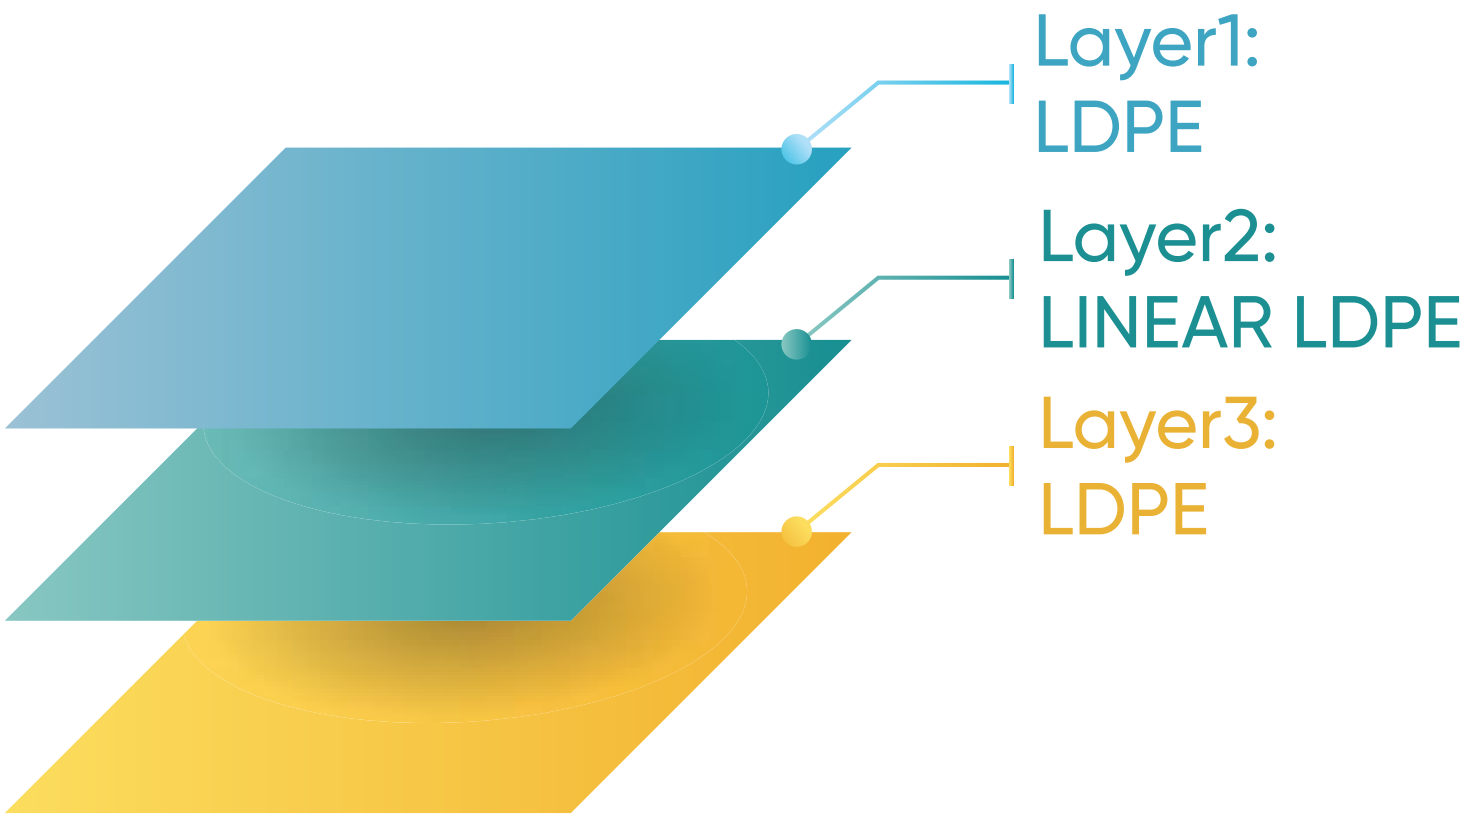

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
PESHRINK	PE	30μ	50μ/2 mil	< 15 cm	> 500 g/in	> 5.0 kg/in	150%

## Feature

- High Durability For Heavy Packaging
- Excellent Stretch And Strength
- Suitable For Bundling Multiple Products

## Variants

- Colors
  - Transparent
  - White
  - Blue
- Slit Material
  - Width: 100mm to 1024mm
  - Length: 1000mtrs

## Application


- Beverage Bottle Bundling
- Industrial Packaging
- Bulk Retail Packs
- Logistics And Transportation Wrapping



# HOT MELT TAPE

Double side tissue tapes are coated with a synthetic rubber-based adhesive, offering strong adhesion and high tack. These tapes are designed for reliable performance, ensuring a secure bond on various surfaces.

They are ideal for lightweight splicing and holding applications, making them suitable for industries like printing, packaging, and electronics. Their easy-to-use design enhances efficiency in assembly and mounting tasks.

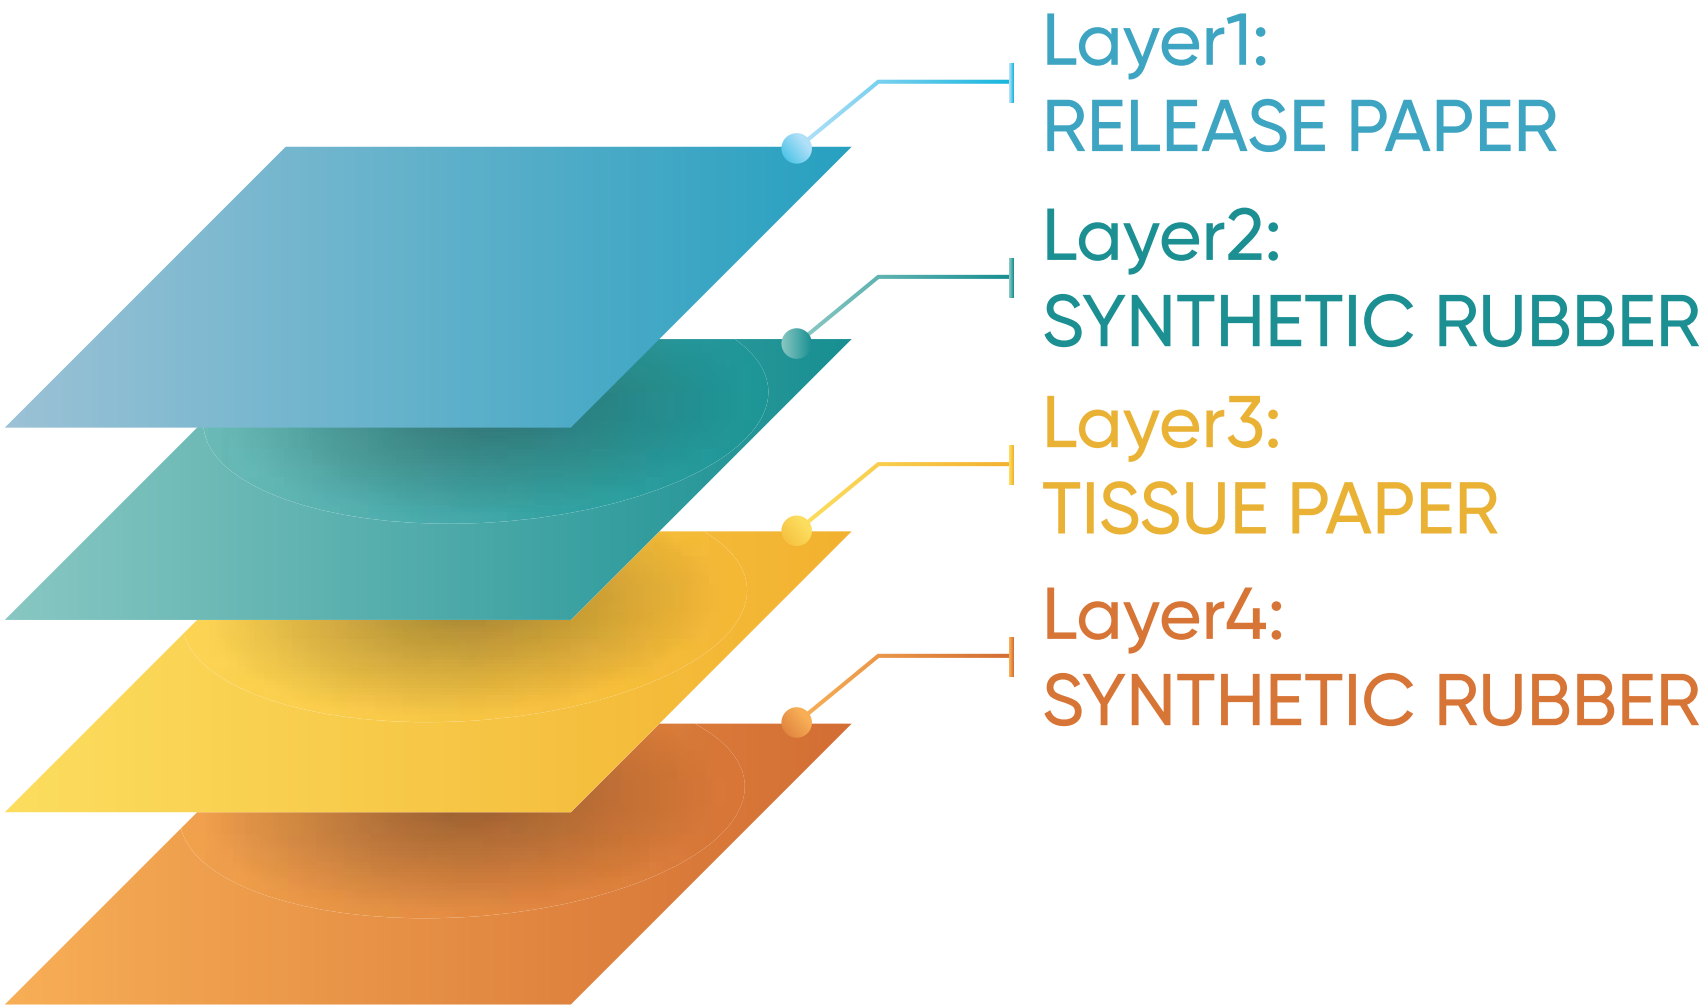

## Performance

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTHM60	Tissue Paper	60µ/2.4 mil	< 6 cm	> 600 g/in	> 40 g/in	-10 C to 60 C

## Feature

- Non-Stretchable
- Easy to Apply on Smooth Surfaces
- Easy to Handle
- High Tack Synthetic Rubber Adhesive

## Variants

- Colors
  - White
- Slit Material
  - Width: 12mm to 100mm
  - Length: 10mtr to 200mtrs
- Jumbo Rolls
  - Width: Upto 1020mm
  - Length: Upto 1000mtrs

## Application

- Arts & Crafts
- Joining & Splicing Operations
- Light Mounting Applications






# SOLVENT BASED TAPE

Double side tissue tapes coated with a rubber solvent adhesive offer very high tack and strong bonding capabilities. They are designed to provide reliable adhesion on various surfaces, ensuring durability and stability.

These tapes are suitable for medium to heavy-weight splicing and holding applications. Commonly used in industries like printing, packaging, and construction, they offer excellent performance for demanding tasks.

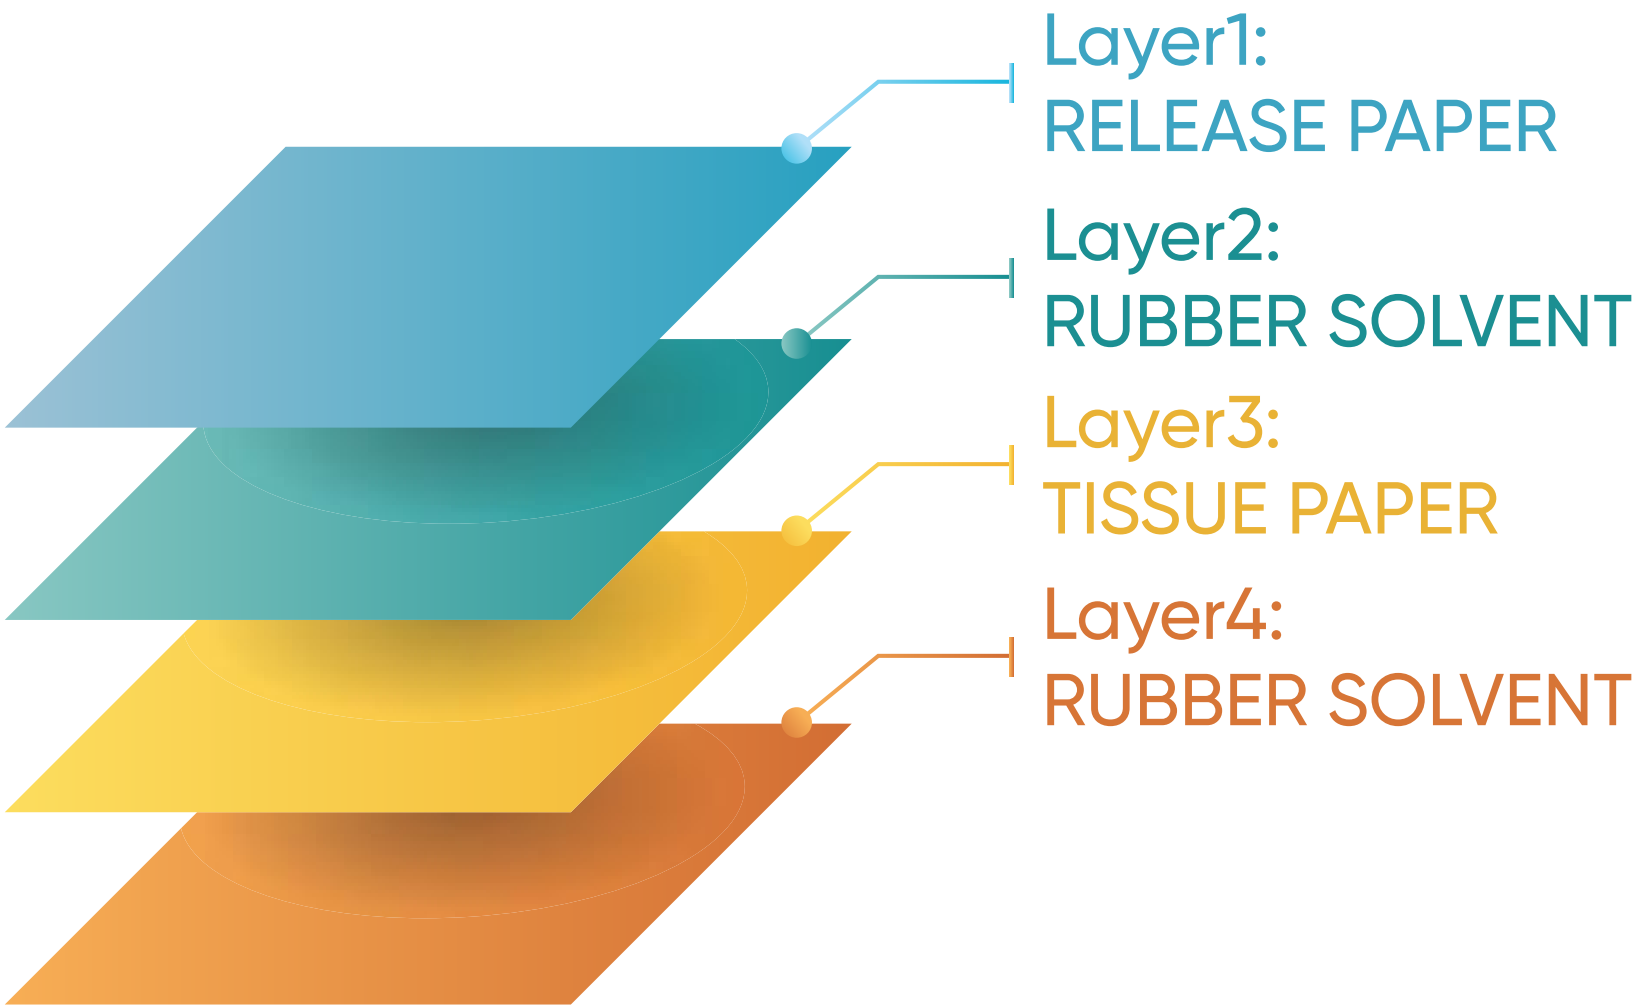

## Performance

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTSB70	Tissue Paper	70μ/2.8 mil	< 5 cm	> 800 g/in	> 40 g/in	-10 C to 60 C

## Feature

- Non-Stretchable
- Easy to Apply on Smooth Surfaces
- Easy to Handle
- High Tack Solvent Based Adhesive

## Variants

- Colors
  - White
- Slit Material
  - Width: 12mm to 100mm
  - Length: 10mtr to 200mtrs
- Jumbo Rolls
  - Width: Upto 1260mm
  - Length: Upto 1000mtrs

## Application


- Mounting Applications
- Joining & Splicing Operations



# ACRYLIC TAPE

Double side tissue tapes coated with acrylic adhesive provide reliable results for medium to heavy-weight splicing applications. They offer strong adhesion and are suitable for various industrial uses, ensuring secure bonding and efficient performance.

These tapes are UV resistant, making them ideal for long-lasting applications. Their durability and resistance to environmental factors make them perfect for both indoor and outdoor use, offering consistent results over time.

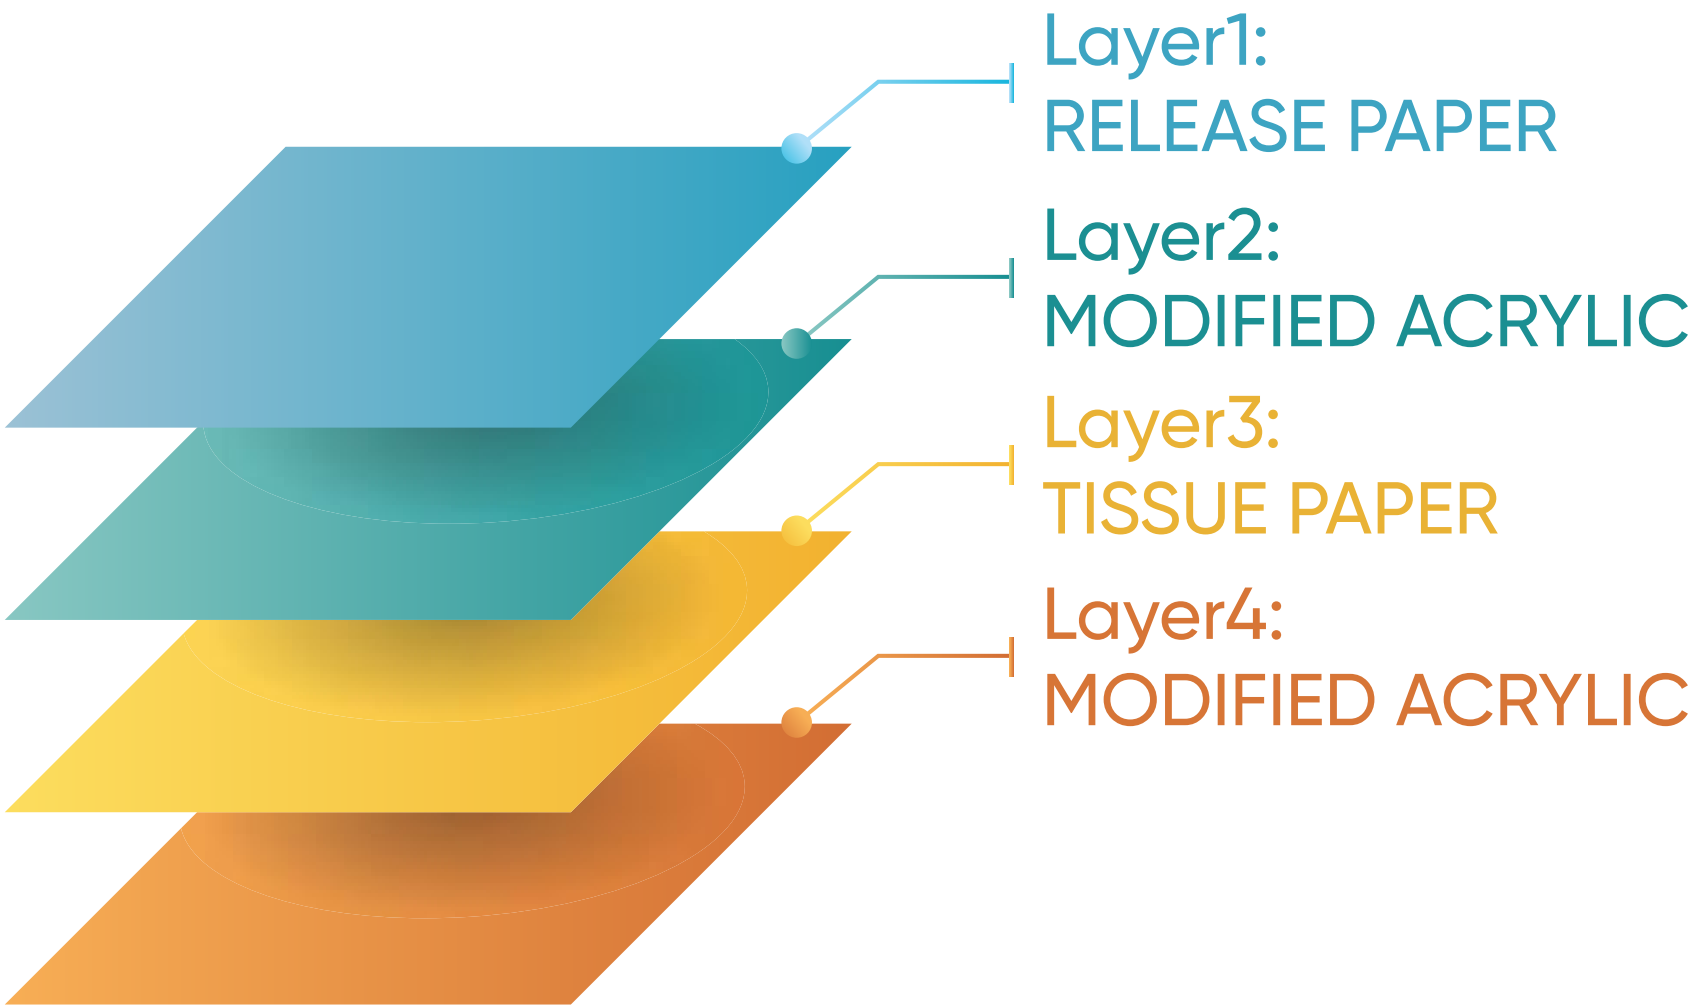

## Performance

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTWB105	Tissue Paper	105µ/4.2 mil	< 4.5 cm	> 1000 g/in	> 40 g/in	-20 C to 100 C

## Feature

- Non-Stretchable
- Easy to Apply on Smooth Surfaces
- Easy to Handle
- Eco-Friendly, 100% Recyclable
- Re-Pulpable

## Variants

- Colors
  - White
- Slit Material
  - Width: 12mm to 100mm
  - Length: 10mtr to 200mtrs
- Jumbo Rolls
  - Width: Upto 1220mm
  - Length: Upto 1000mtrs

## Application

- Mounting Applications
- Joining & Splicing Operations






# SELF ADHESIVE KRAFT TAPE

Self-adhesive Kraft paper tapes are made from high-strength, 100% recycled Kraft paper, offering great durability. They provide reliable performance for packaging and sealing, serving as an eco-friendly alternative to traditional tapes.

These tapes are 100% recyclable, compostable, and biodegradable, making them ideal for eco-conscious businesses. They help reduce waste while maintaining strong adhesion and functionality.

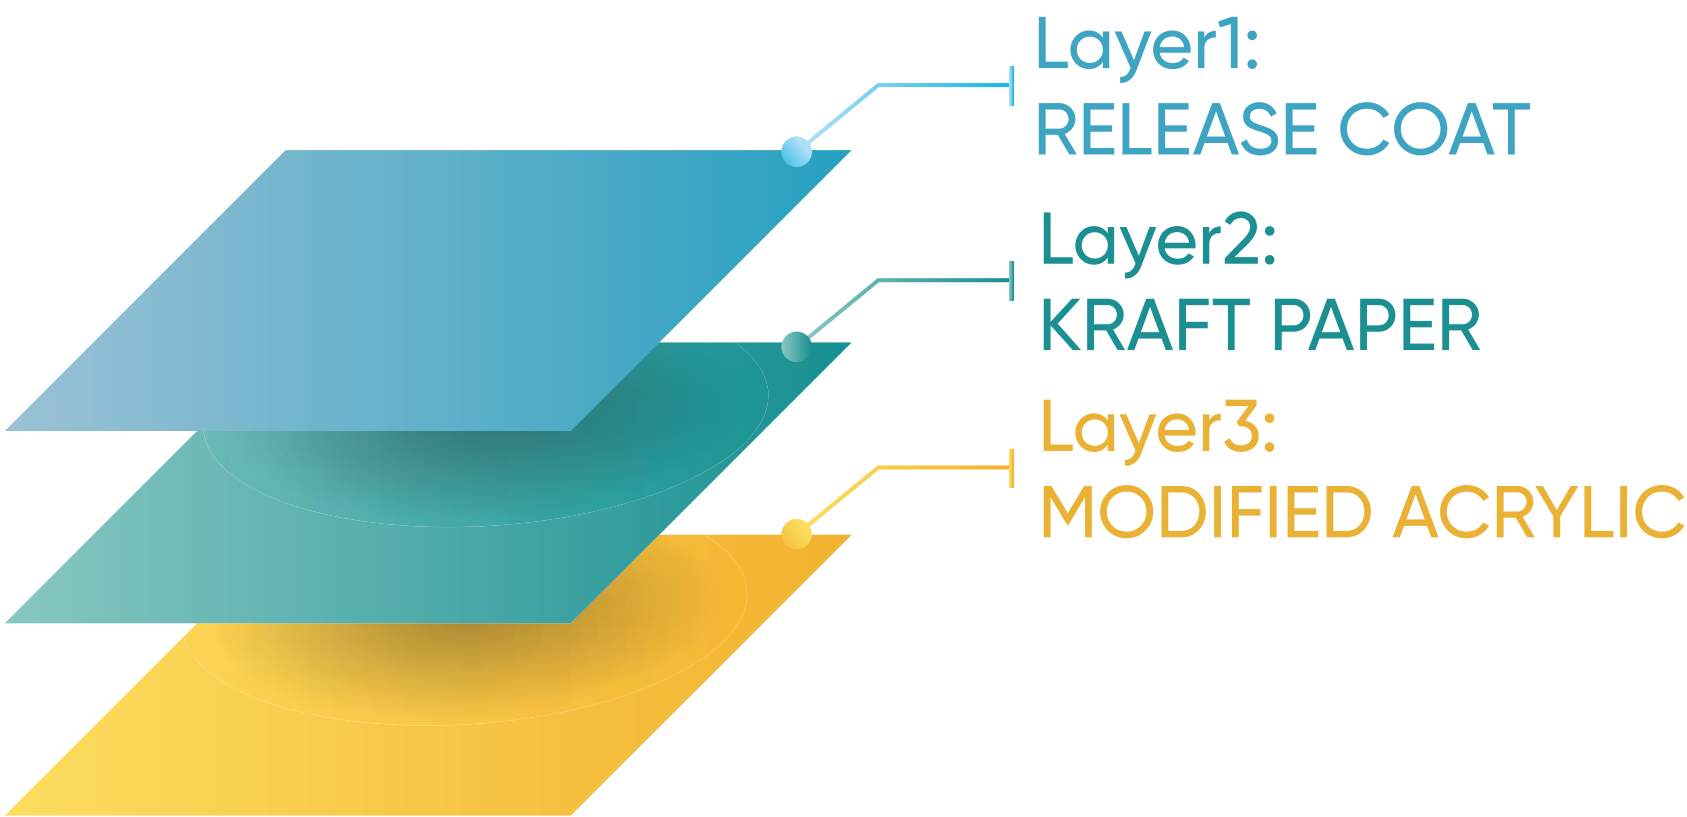

## Performance

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Peel	Tensile	Temperature Resistance
SAK70	Kraft Paper	70 GSM	115 GSM	> 1500 mins	> 900 g/in	> 7 kg/in	-20 C to 80 C

## Feature

- Compostable & Re-Pulpable
- Eco-Friendly, 100% Recyclable
- Easy to Handle & Apply
- High Durability & Tear Resistance

## Variants

- Colors
  - Brown
  - White
- Slit Material
  - Width: 18mm to 96mm
  - Length: 25mtr to 500mtrs
- Jumbo Rolls
  - Width: Upto 1060mm
  - Length: Upto 500mtrs

## Application


- Light-Heavy Duty Packaging
- General Bonding
- DIY Applications



# WATER ACTIVATED TAPE

Water-activated paper tape, also known as gummed paper tape, is an economical solution that promotes sustainability and security. It is widely used for packaging applications, offering an eco-friendly alternative to plastic-based tapes and reducing environmental impact.

Once applied, the tape bonds permanently with Kraft paper cartons, ensuring strong and secure sealing. This makes it ideal for shipping, storage, and various industrial packaging needs.

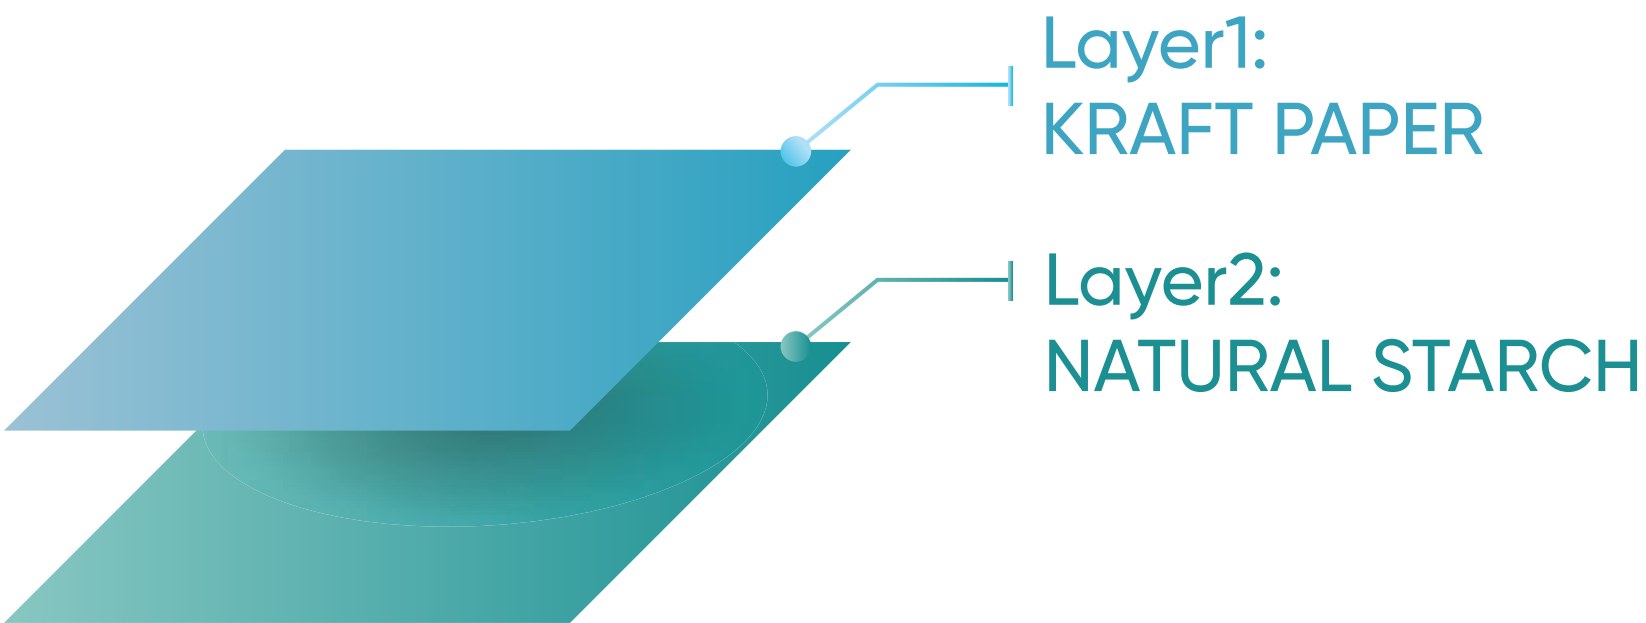

## Performance

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Bonding to Paper	Tensile	Temperature Resistance
KRA70WAT	Kraft Paper	70 GSM	95 GSM	> 10000 mins	Permanent	> 7 kg/in	-30 C to 80 C

## Feature

- Compostable & Re-Pulpable
- Eco-Friendly, 100% Recyclable
- Cost-Effective
- High Durability & Tear Resistance
- Permanent Bond with The Surface

## Variants

- Colors
  - Brown
  - White
- Slit Material
  - Width: 18mm to 96mm
  - Length: 25mtr to 500mtrs
- Jumbo Rolls
  - Width: Upto 1060mm
  - Length: Upto 500mtrs

## Application

- Light-Heavy Duty Packaging
- Tamper Proof Packaging






# REINFORCED WATER TAPE

Reinforced water-activated paper tape is tri-way reinforced with fiberglass thread, offering high tear resistance and durability. It is ideal for heavy-duty packaging, ensuring secure and reliable sealing for various industries.

Once applied, the tape bonds permanently with Kraft paper cartons, providing strong adhesion for long-term use. This makes it perfect for shipping, storage, and industrial packaging needs, offering dependable performance every time.

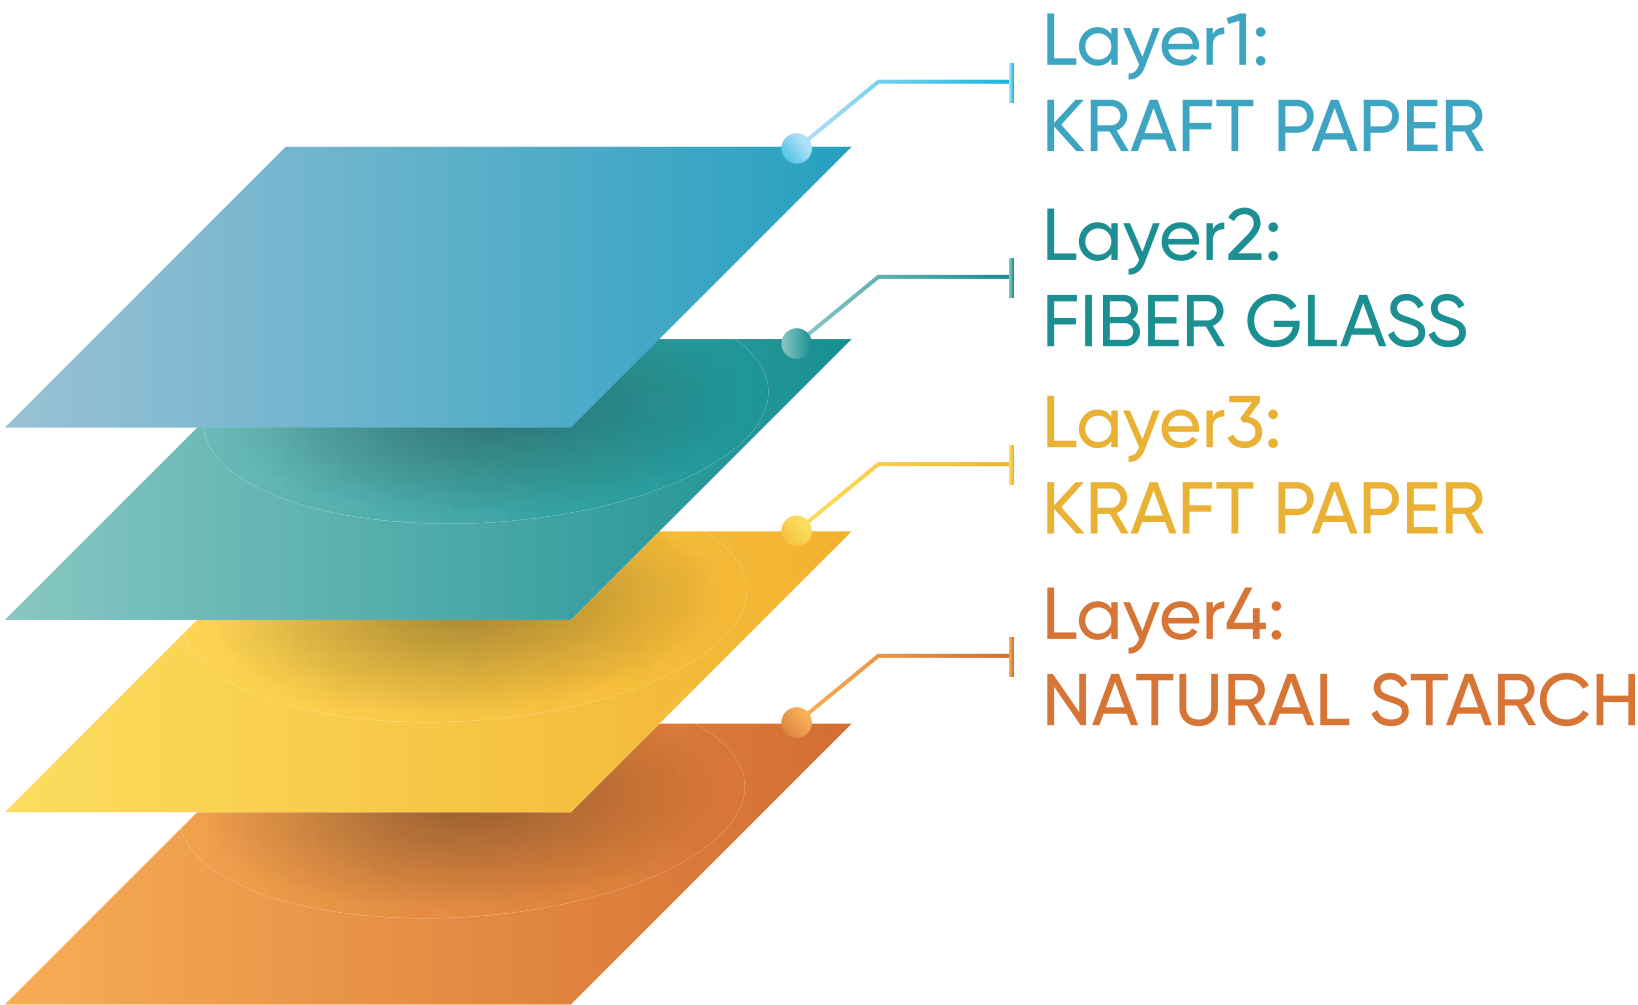

## Performance

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Bonding to Paper	Tensile	Temperature Resistance
REIN140WAT	Reinforced Kraft Paper	100 GSM	140 GSM	>10000 mins	Permanent	> 19 kg/in	-30 C to 80 C

## Feature

- Permanent Bond with The Surface
- Reinforced Fiber Glass for Increased Strength
- High Durability & Tear Resistance

## Variants

- Colors
  - Brown
- Slit Material
  - Width: 18mm to 96mm
  - Length: 25mtr to 500mtrs
- Jumbo Rolls
  - Width: Upto 1060mm
  - Length: Upto 1000mtrs

## Application


- Heavy Duty Packaging
- Tamper Proof Packaging



# SELF ADHESIVE CREPE TAPE

Crepe has excellent absorbency, making it moisture-resistant and suitable for various applications. Easy to tear and lightweight, these tapes are an ideal choice for light to heavy-duty packing, offering convenience and efficiency.

Our Grade P6040 is designed for higher adhesion and better conformity with paper surfaces. It ensures strong bonding, making it suitable for industrial, packaging, and general-purpose applications.

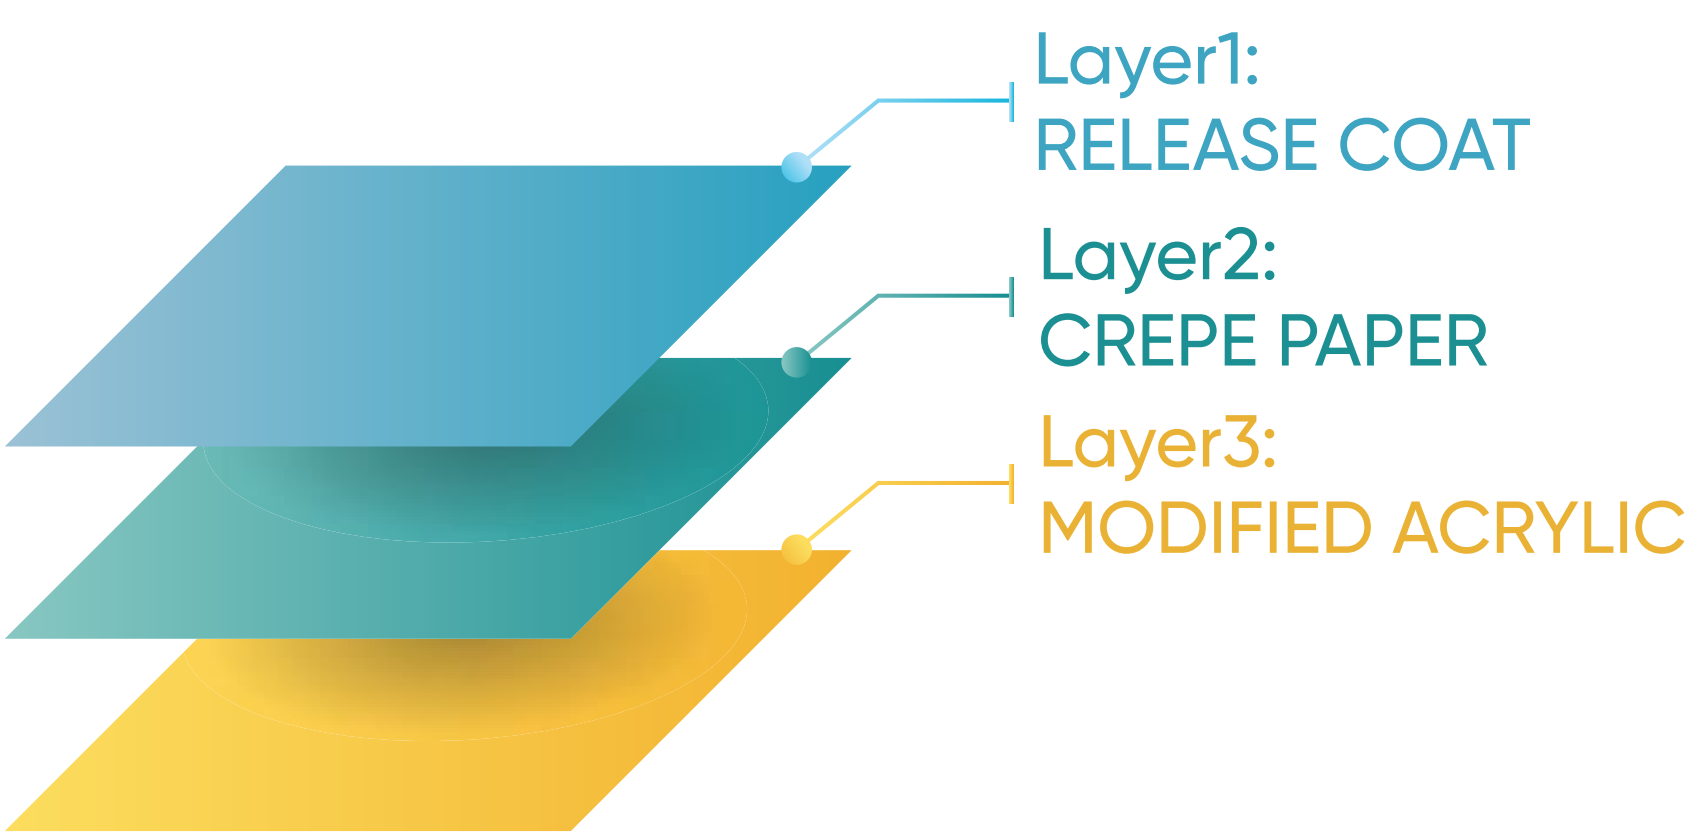

## Performance

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Peel	Tensile	Temperature Resistance
P6040	Crepe Paper	60 GSM	100 GSM	> 700 mins	> 750 g/inch	> 6 kg/in	80 C x 60 mins

## Feature

- Temperature Resistance upto 80°C x 60 minutes
- High Durability & Tear Resistance
- Eco-Friendly, 100% Recyclable
- Moisture Resistant

## Variants

- Colors
  - Brown
  - White
  - Cream
- Slit Material
  - Width: 18mm to 96mm
  - Length: 25mtr to 500mtrs
- Jumbo Rolls
  - Width: Upto 1060mm
  - Length: Upto 1000mtrs

## Application

- Light-Heavy Duty Packaging
- General Bonding
- DIY Applications






# MASKING TAPE

Grade K6143 is a versatile masking tape with a natural rubber-based adhesive. It offers strong holding power, making it suitable for various applications. The tape adheres well to different surfaces and ensures a secure bond.

It is easily removable without leaving residue or breaking, ensuring a clean removal process. Ideal for painting, packaging, and surface protection, it performs well under varying temperatures and delivers consistent results.

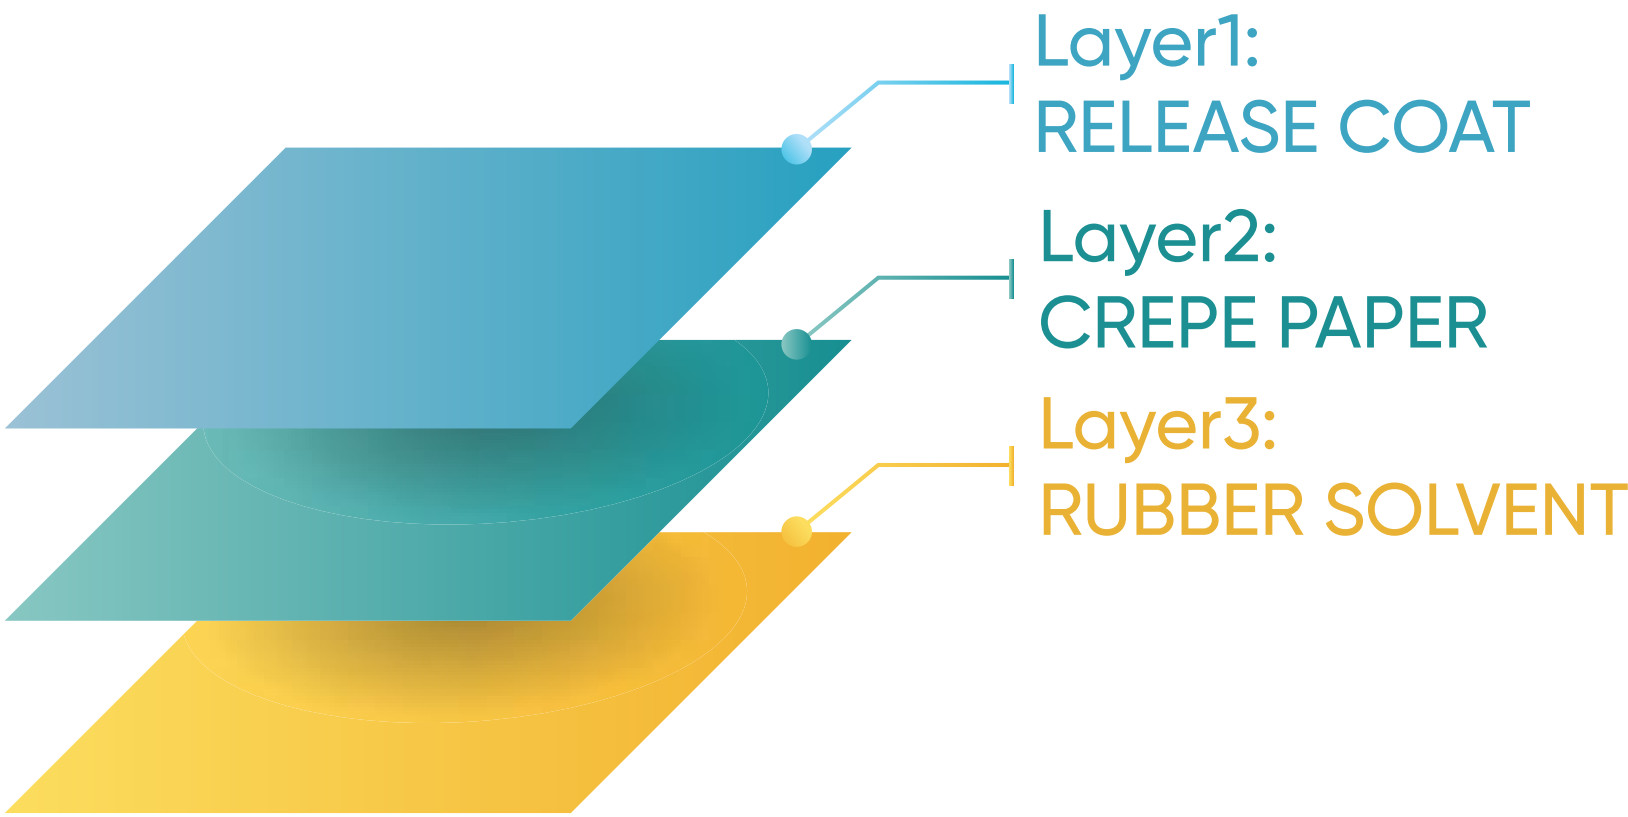

## Performance

Product Code	Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
K6143MASK	Crepe Paper	55 GSM	85 GSM	125μ/5 mil	> 1500 mins	> 750 g/in	7 kg/in	60 C x 60 mins

## Feature

- Strong Crepe Paper
- Clean Removability
- Good Holding Power
- Residue Free
- Temperature Resistance upto 60°C x 60 minutes

## Variants

- Colors
  - Off White
- Slit Material
  - Width: 12mm to 72mm
  - Length: 5mtr to 500mtrs
- Jumbo Rolls
  - Width: Upto 1280mm
  - Length: Upto 2000mtrs

## Application


- Painting Jobs
- Furniture Holding
- Labelling Supplies
- Decoration Purposes



# MASKING TAPE

Grade P6035 is a highly versatile masking tape with modified acrylic adhesive. It offers moderate peel strength, superior holding power, and excellent performance for various industrial and commercial applications.

The tape is easily removable without leaving any residue or breaking. Additionally, it is UV-resistant, ensuring enhanced durability, long-lasting performance, and reliable adhesion in both indoor and outdoor conditions.

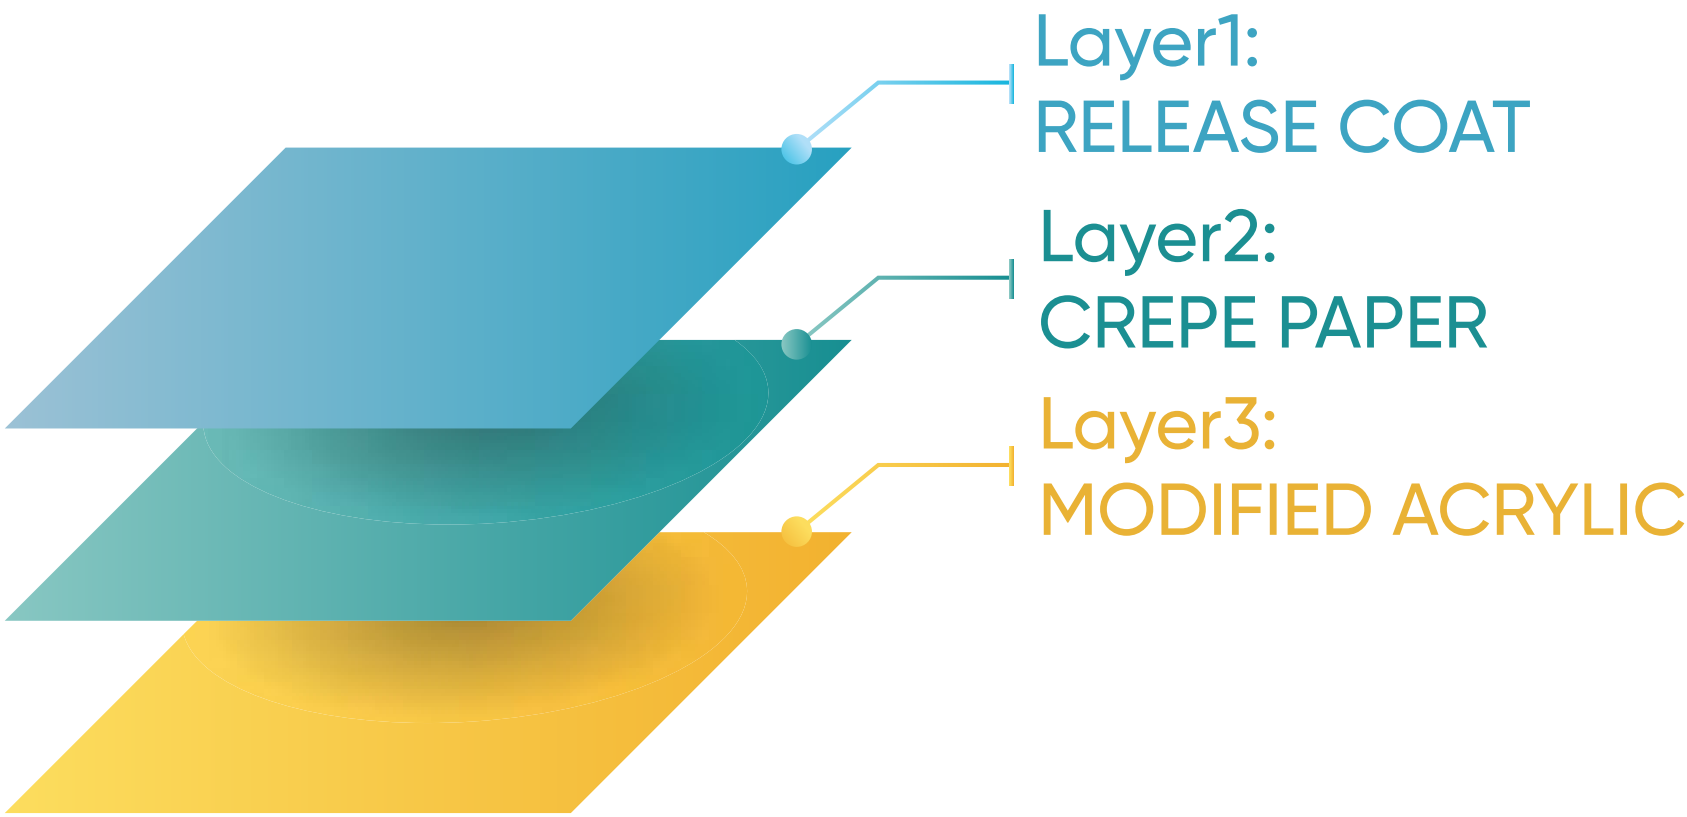

## Performance

Product Code	Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
P6035MASK	Crepe Paper	60 GSM	95 GSM	130µ/5.2 mil	> 1440 mins	> 450 g/in	6 kg/in	80 C x 60 mins

## Feature

- Strong Crepe Paper
- Clean Removability
- 30 Days Residue Free Removal Guaranteed
- UV Resistant
- Temperature Resistance upto 80°C x 60 minutes

## Variants

- Colors
  - White
- Slit Material
  - Width: 12mm to 72mm
  - Length: 5mtr to 500mtrs
- Jumbo Rolls
  - Width: Upto 1280mm
  - Length: Upto 2000mtrs

## Application

- Painting Jobs
- Furniture Holding
- Labelling Supplies
- Decoration Purposes






# AUTOMOTIVE TAPE

Grade P6030 is a versatile masking tape made with modified acrylic adhesive. It offers good peel strength, excellent flexibility, and high holding power, making it suitable for various industrial and commercial applications.

This tape is easily removable without leaving residue or breaking. It is also UV-resistant, providing enhanced durability, weather resistance, and long-lasting performance in both indoor and outdoor environments.

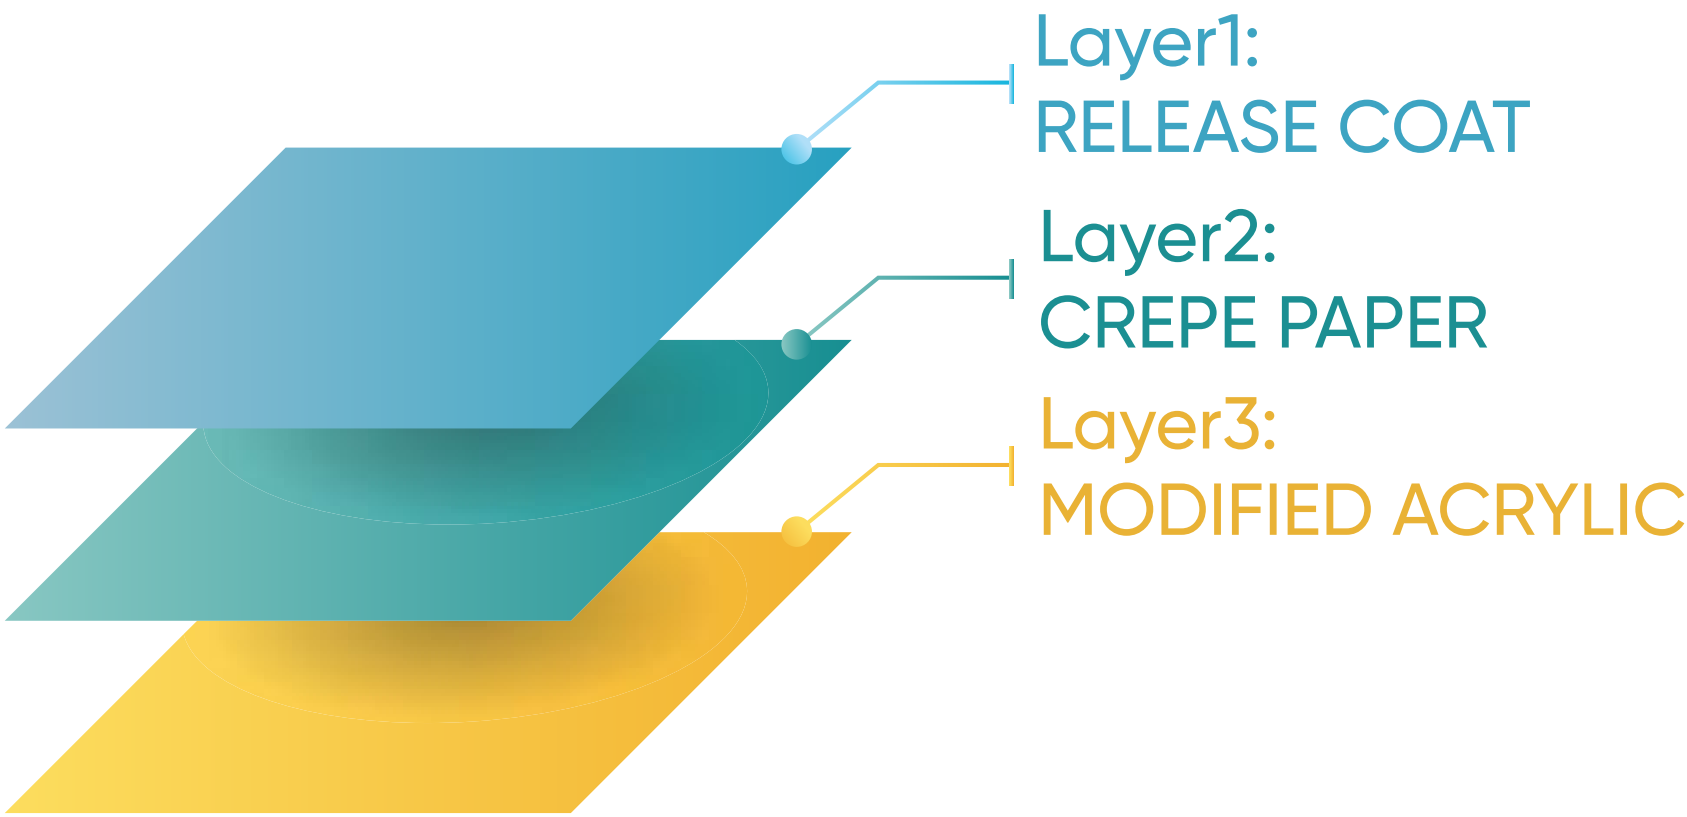

## Performance

Product Code	Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
P6030MASK	Crepe Paper	60 GSM	90 GSM	125µ/5 mil	> 600 mins	> 400 g/in	6 kg/in	80 C x 60 mins

## Feature

- Strong Crepe Paper
- Clean Removability
- 30 Days Residue Free Removal Guaranteed
- UV Resistant
- Temperature Resistance upto 80°C x 60 minutes

## Variants

- Colors
  - White
- Slit Material
  - Width: 12mm to 72mm
  - Length: 5mtr to 500mtrs
- Jumbo Rolls
  - Width: Upto 1280mm
  - Length: Upto 2000mtrs

## Application


- Painting Jobs
- Temporary Holding
- Labelling Supplies



# GASKET TAPE

Gasket Tape is used for sealing electrical panels in industrial units and automobile bodies. It offers reliable insulation and protection, ensuring durability and efficiency in various applications.

These tapes are typically made of EVA Foam as a substrate and coated with acrylic adhesive. They provide excellent cushioning, strong adhesion, and resistance to environmental factors, making them ideal for long-term use.

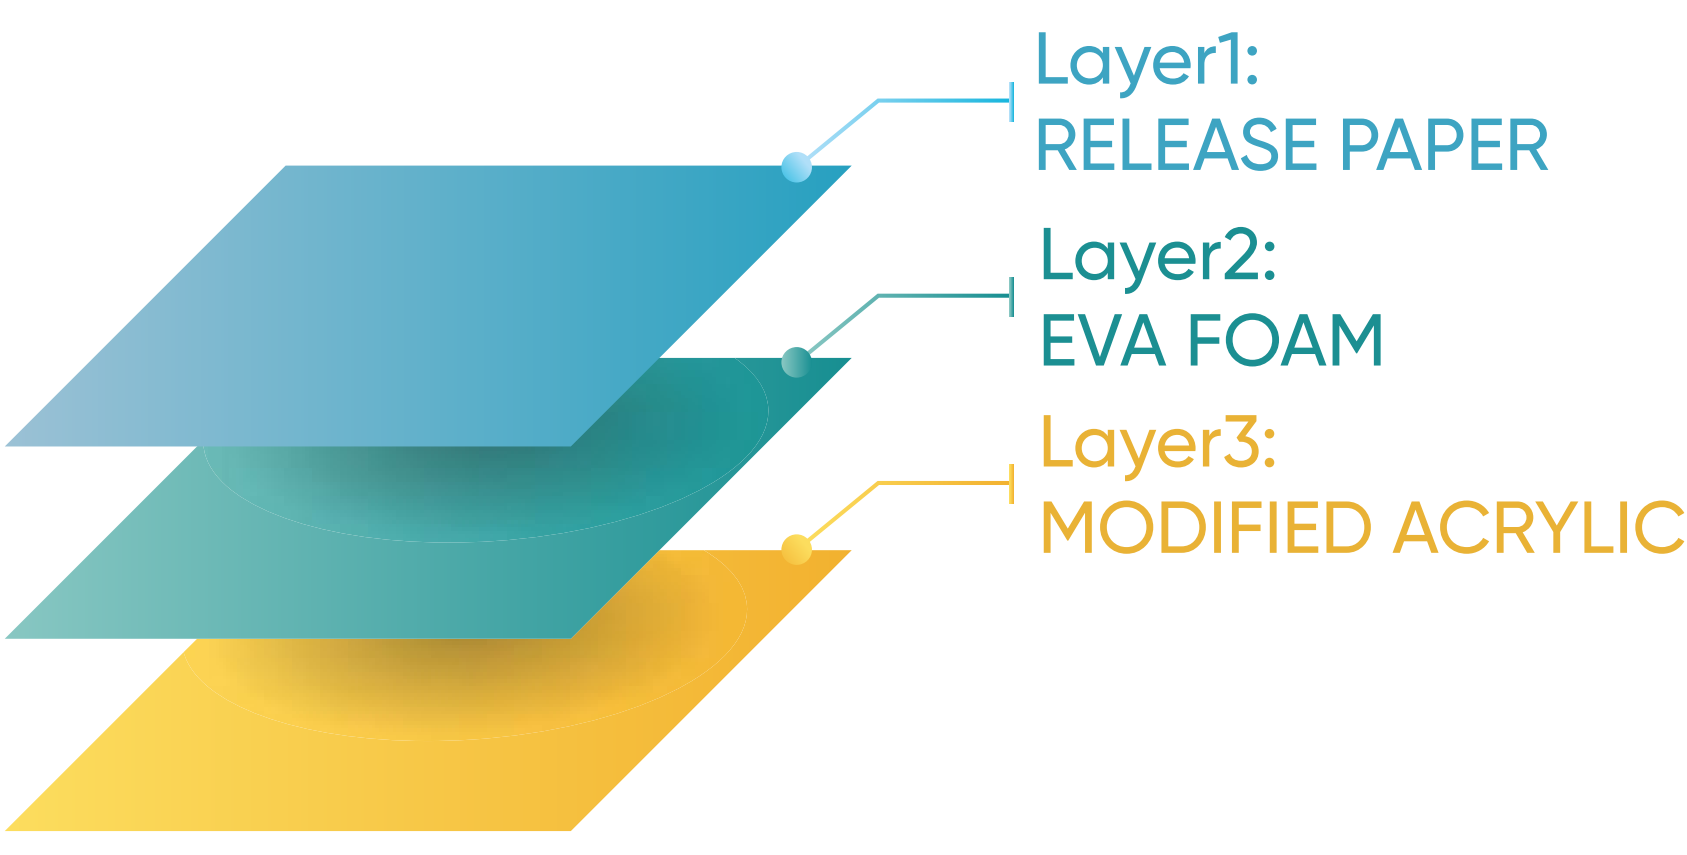

## Performance

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
SSFBC2MM	EVA Foam	2mm	< 8 cm	> 700 mins	> 800 g/in	> 1.2 kg/in	20%
SSFBC3MM	EVA Foam	3mm	< 8 cm	> 700 mins	> 800 g/in	> 1.7 kg/in	20%
SSFBC4MM	EVA Foam	4mm	< 8 cm	> 700 mins	> 800 g/in	> 2.2 kg/in	20%
SSFBC5MM	EVA Foam	5mm	< 8 cm	> 700 mins	> 800 g/in	> 2.7 kg/in	20%
SSFBC6MM	EVA Foam	6mm	< 8 cm	> 700 mins	> 800 g/in	> 3.2 kg/in	20%
SSFBC8MM	EVA Foam	8mm	< 8 cm	> 700 mins	> 800 g/in	> 4.2 kg/in	20%
SSFBC10MM	EVA Foam	10mm	< 8 cm	> 700 mins	> 800 g/in	> 5.2 kg/in	20%

## Feature

- High Strength Acrylic Adhesive for Superior Bonding
- Elastic Foam for Great Cushioning

## Variants

- Colors
  - Black
- Slit Material
  - Width: 10mm to 100mm
  - Length: Upto 10mtrs
- Jumbo Rolls
  - Width: Upto 1020mm
  - Length: Upto 100mtrs

## Application

- Gasketing of Electrical Panels
- Insulation of Electrical Panels
- Protecion from Sharp Edges






# INSULATION TAPE

White EVA foam tape is used for heat insulation, providing effective thermal protection for industrial and household applications. It helps reduce energy loss and improves system efficiency.

These tapes are coated with modified acrylic adhesive, offering wide heat resistance. They withstand temperatures from -10°C to 70°C, ensuring durability. They also provide excellent cushioning and soundproofing.

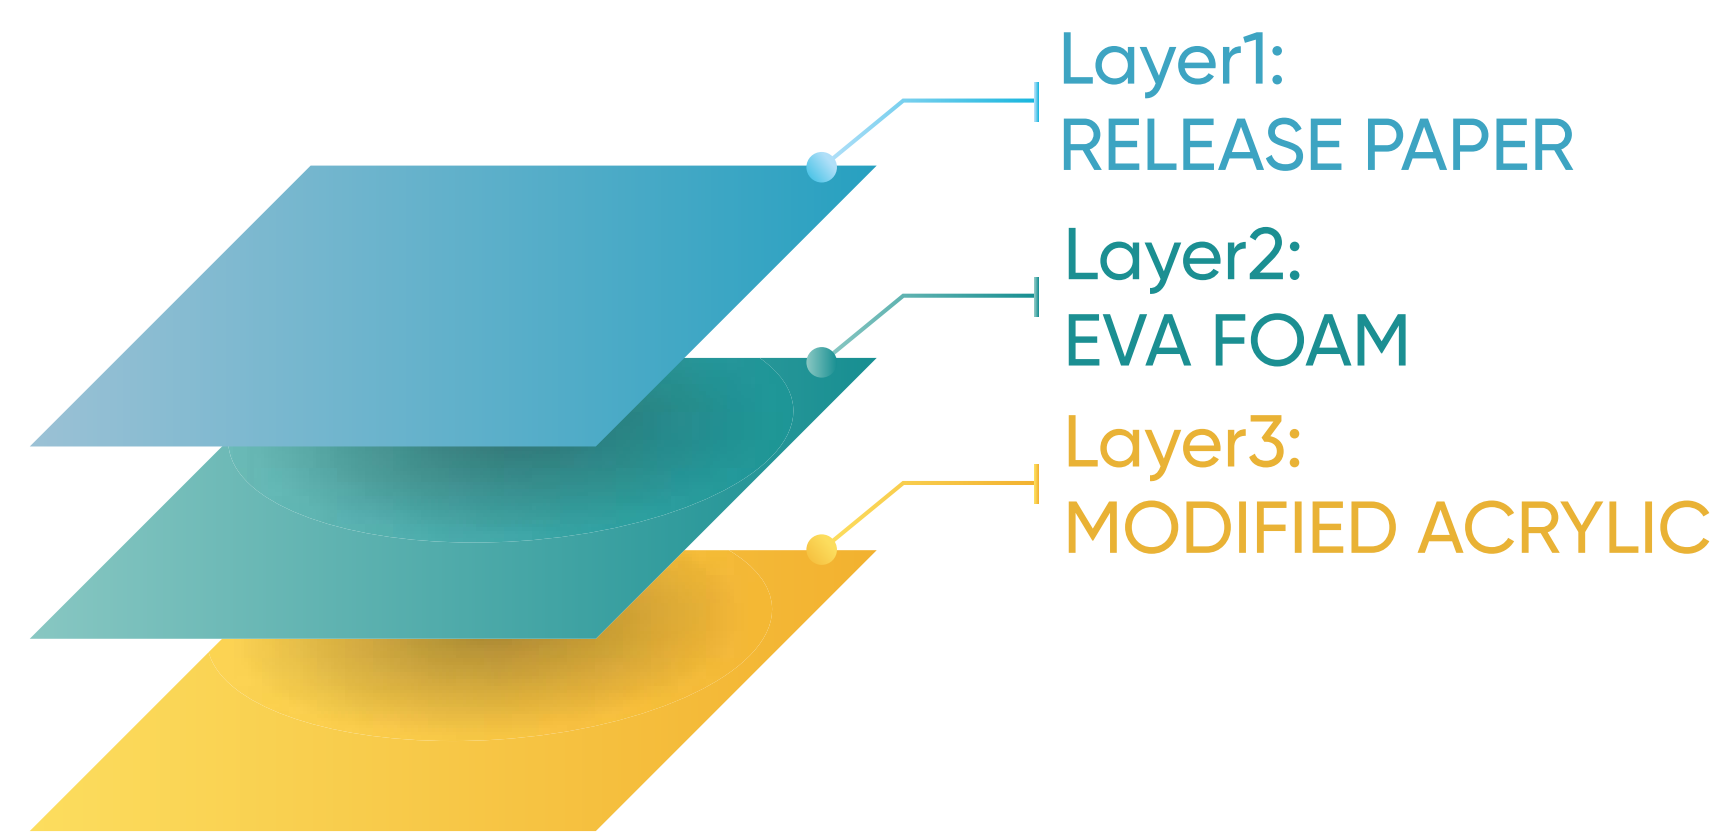

## Performance

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
SSFWB2MM	EVA Foam	2mm	< 8 cm	> 700 mins	> 800 g/in	> 1.2 kg/in	20%
SSFWB3MM	EVA Foam	3mm	< 8 cm	> 700 mins	> 800 g/in	> 1.7 kg/in	20%
SSFWB5MM	EVA Foam	5mm	< 8 cm	> 700 mins	> 800 g/in	> 2.7 kg/in	20%

## Feature

- High Strength Acrylic Adhesive For Superior Bonding
- Elastic Foam for Great Cushioning
- Easy to Apply on Variety of Surfaces

## Variants

- Colors
  - White
- Slit Material
  - Width: 10mm to 100mm
  - Length: Upto 10mtrs
- Jumbo Rolls
  - Width: Upto 1020mm
  - Length: Upto 100mtrs

## Application


- Light-Duty Electrical Insulation
- Light-Duty Heat Insulation



# MOUNTING TAPE

EVA Double Side Foam tapes are ideal for various lightweight mounting applications. They provide reliable and consistent adhesion, making them suitable for different surfaces in both industrial and household settings.

These durable tapes are specifically designed to hold up to 1/2 kg load per square inch, ensuring strong and long-lasting bonding strength. They also offer excellent cushioning and are easy to apply, making them highly versatile and efficient.

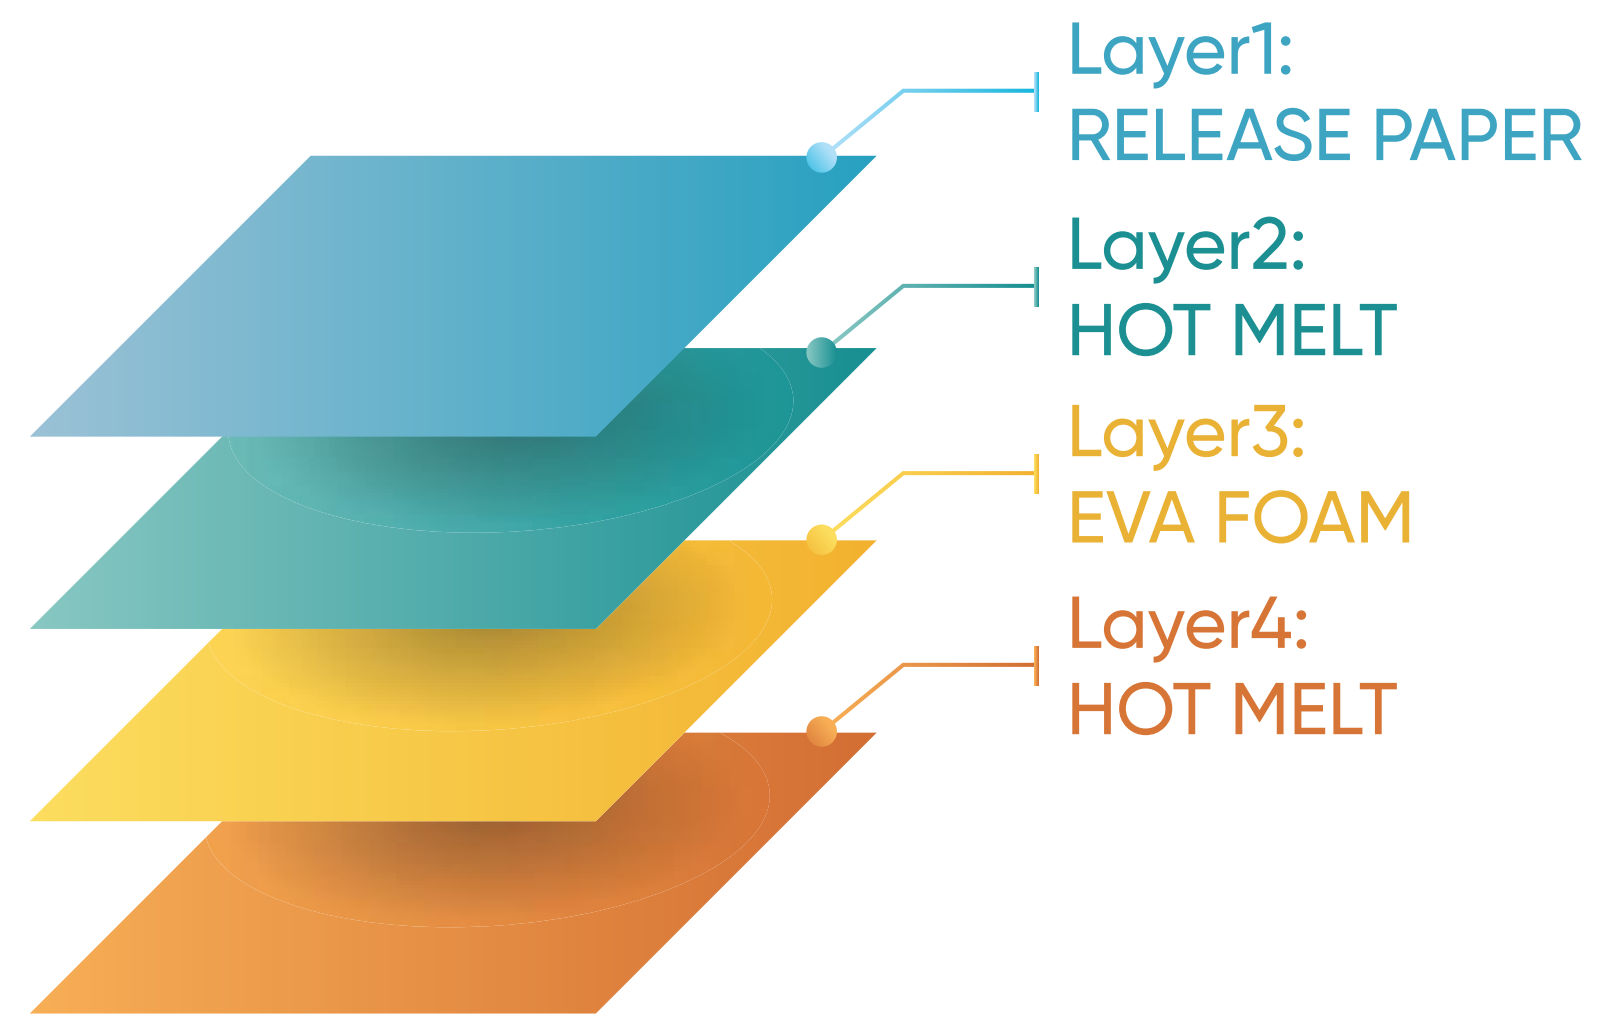

## Performance

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
DSFHM2MM	EVA Foam	2mm	< 7 cm	> 1000 mins	> 1500 g/in	> 2 kg/in	20%

## Feature

- Strong Adhesive for Superior Bonding
- Elastic Foam for Great Cushioning
- Easy to Apply on Variety of Surfaces
- Easy to Unwind

## Variants

- Colors
  - White
- Slit Material
  - Width: 6mm to 50mm
  - Length: 0.7mtr to 10mtrs
- Jumbo Rolls
  - Width: Upto 1020mm
  - Length: Upto 100mtrs

## Application

- Light Mounting
- DIY & Stationery
- Cushioning






# SURFACE TAPE

General Purpose Surface Protection Tape is designed to safeguard various surfaces from scratches, dust, and minor damages. It offers reliable protection during manufacturing, transportation, and installation processes.

This tape is ideal for low gloss or low matt surfaces such as glass, steel, wood, laminates, and polycarbonate sheets. Its versatile application makes it a practical choice for both industrial and domestic use.

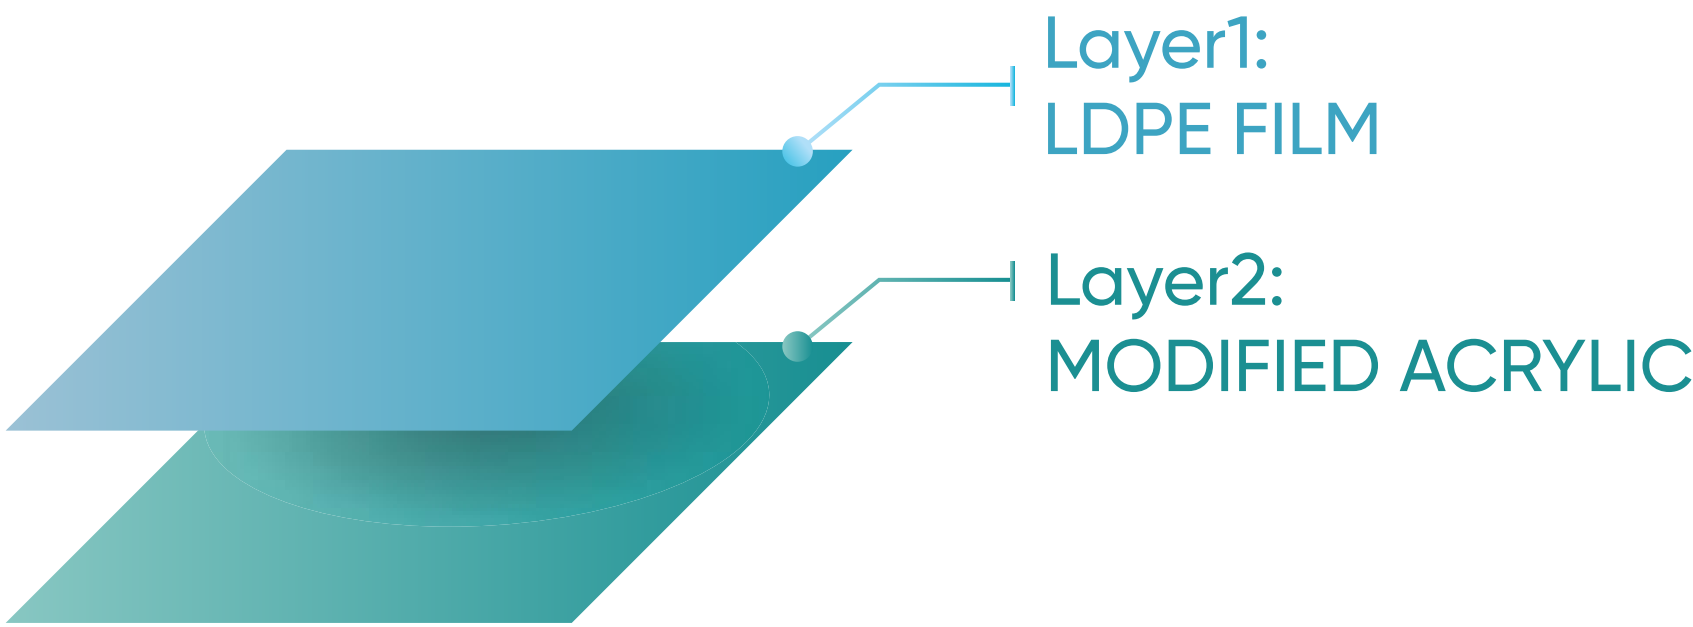

## Performance

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
30NAT120P	Multi-Layer LDPE Film	31µ/1.24 mil	100-120 g/in	< 20 cm	2.3 kg/in	6 months
40NAT120P	Multi-Layer LDPE Film	41µ/1.64 mil	100-120 g/in	< 20 cm	3.1 kg/in	6 months

## Feature

- Modified Acrylic Adhesive For Stable Bonding
- Cross-Linked Formulation to Prevent Gum Transfer/Peel-Gain
- Easy to Apply & Remove On Variety of Surfaces
- Easy to Peel-Off

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 24mm to 1235mm
  - Length: 50mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 1235mm
  - Length: Upto 1000mtrs

## Application


- Usable on Multiple Surfaces like Metal, Laminates, Glass, Ceramics & Plastics



# FLOOR GUARD TAPE

Floor Guard can be applied to almost any surface, offering reliable protection during various activities. It is particularly useful in environments where surfaces are exposed to heavy use or potential damage.

This protective layer safeguards against mechanical damage, provides chemical resistance, and most importantly, prevents scratches during construction activities, ensuring surfaces remain intact and clean.

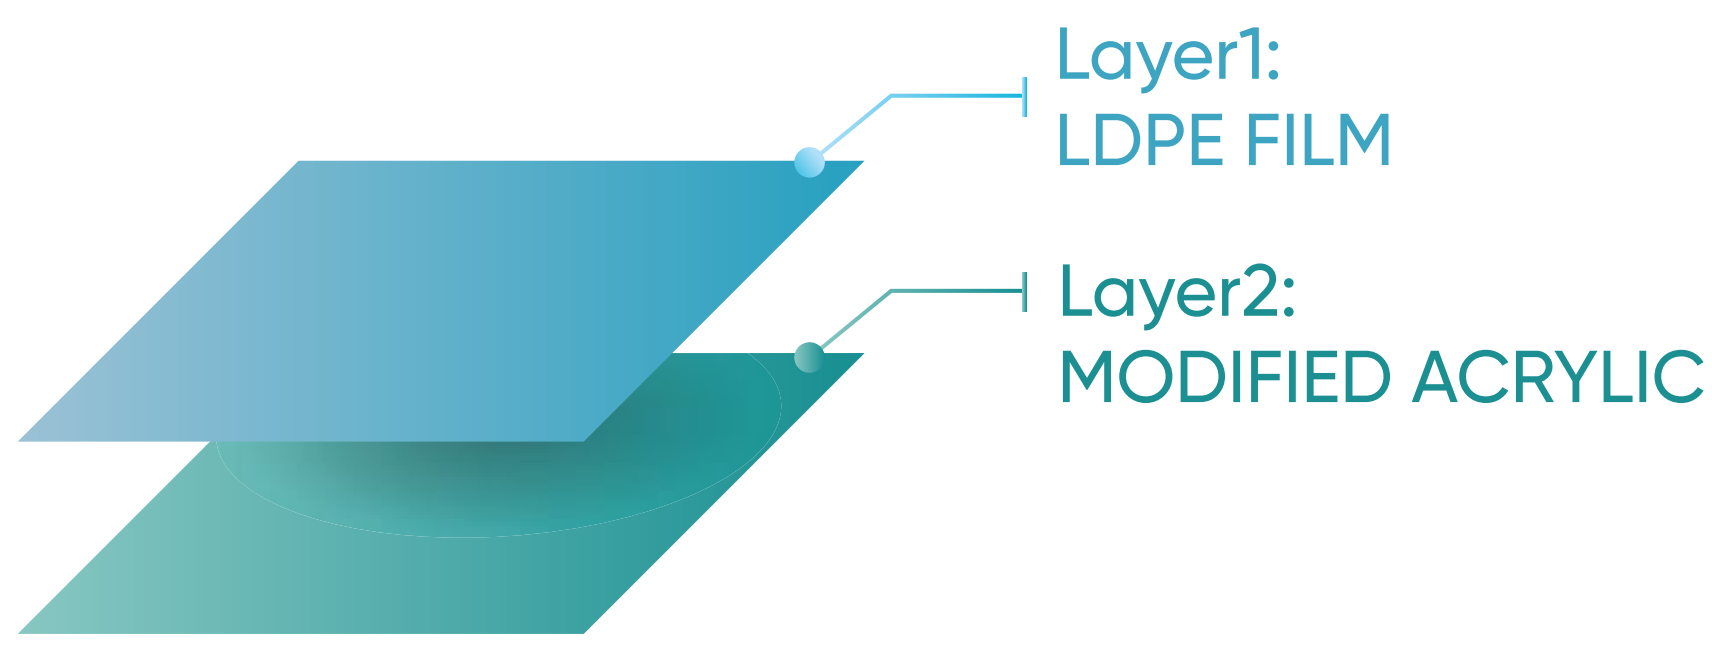

## Performance

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
95NAT120P	Multi-Layer LDPE Film	95μ/3.8 mil	100-120 g/in	< 20 cm	7.8 kg/in	6 months

## Feature

- Modified Acrylic Adhesive For Stable Bonding
- Cross-Linked Formulation to Prevent Gum Transfer/Peel-Gain
- Easy to Apply & Remove On Variety of Surfaces
- Easy to Peel-Off

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 24mm to 1235mm
  - Length: 50mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 1235mm
  - Length: Upto 1000mtrs

## Application

- Suitable for Marble, Ceramics & Wood
- For Construction & Interior Works






# CARPET TAPE

Carpet Protection Tape helps prevent carpets from gathering dirt and wearing out during manufacturing or transit. It serves as a protective barrier, maintaining the carpet's quality and extending its lifespan.

Special care is taken to ensure that carpet fabric threads remain fully intact and undamaged. This prevents threads from coming off when the tape is pulled, effectively preserving the carpet's appearance, durability, and overall longevity.

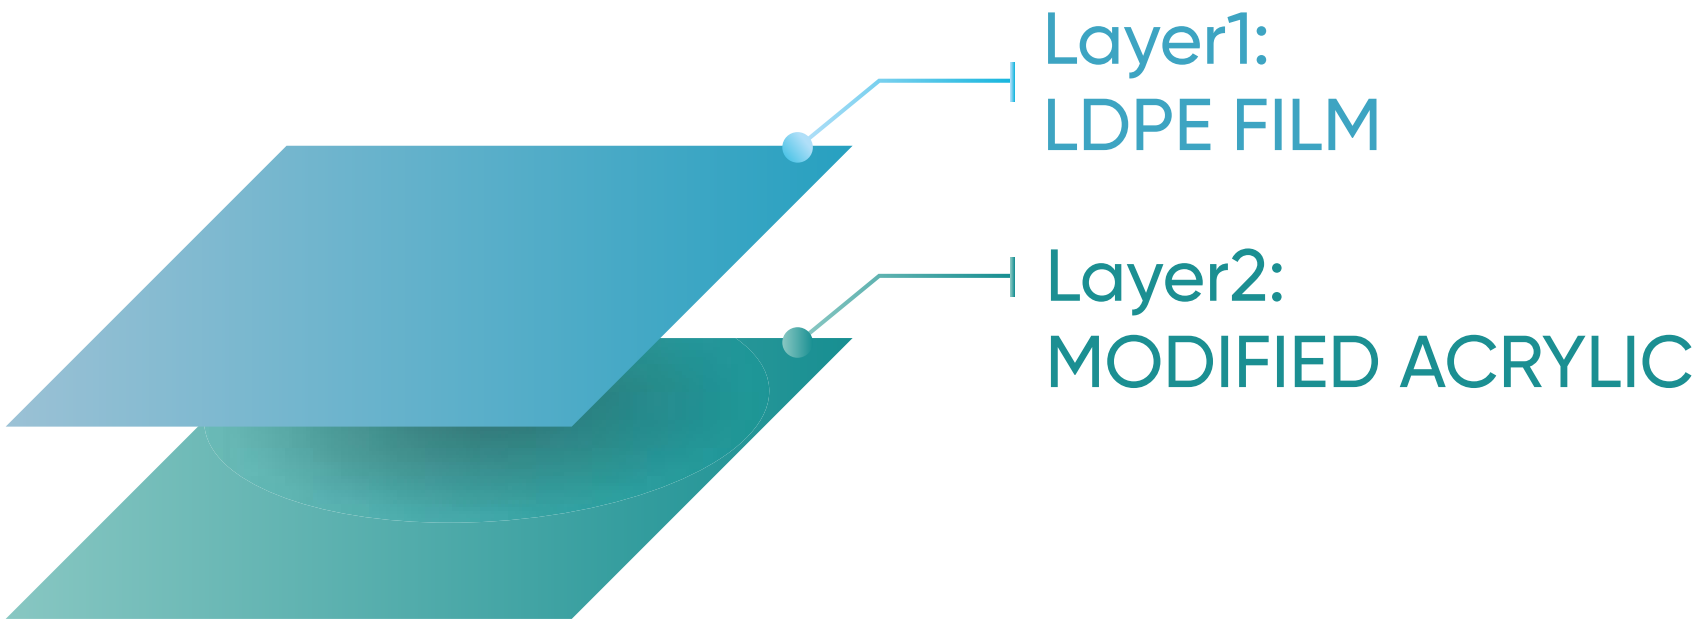

## Performance

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
65NAT180P	Multi-Layer LDPE Film	66µ/2.64 mil	180-200 g/in	< 20 cm	5.05 kg/in	6 months

## Feature

- Modified Acrylic Adhesive For Stable Bonding
- Cross-Linked Formulation to Prevent Gum Transfer/Peel-Gain
- Easy to Apply & Remove On Variety of Surfaces
- Easy to Peel-Off

## Variants

- Colors
  - Transparent
- Slit Material
  - Width: 24mm to 1235mm
  - Length: 50mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 1235mm
  - Length: Upto 1000mtrs

## Application


- Protection of Carpets



# ALUMINIUM PANEL TAPE

AL panel protection films are specifically designed for UV resistance and weathering. They offer reliable protection for sensitive surfaces, ensuring durability and minimizing damage during various construction processes.

These films are ideal for safeguarding panels from harsh environmental conditions. They help maintain surface quality by preventing scratches, stains, and other forms of wear that can occur during construction activities.

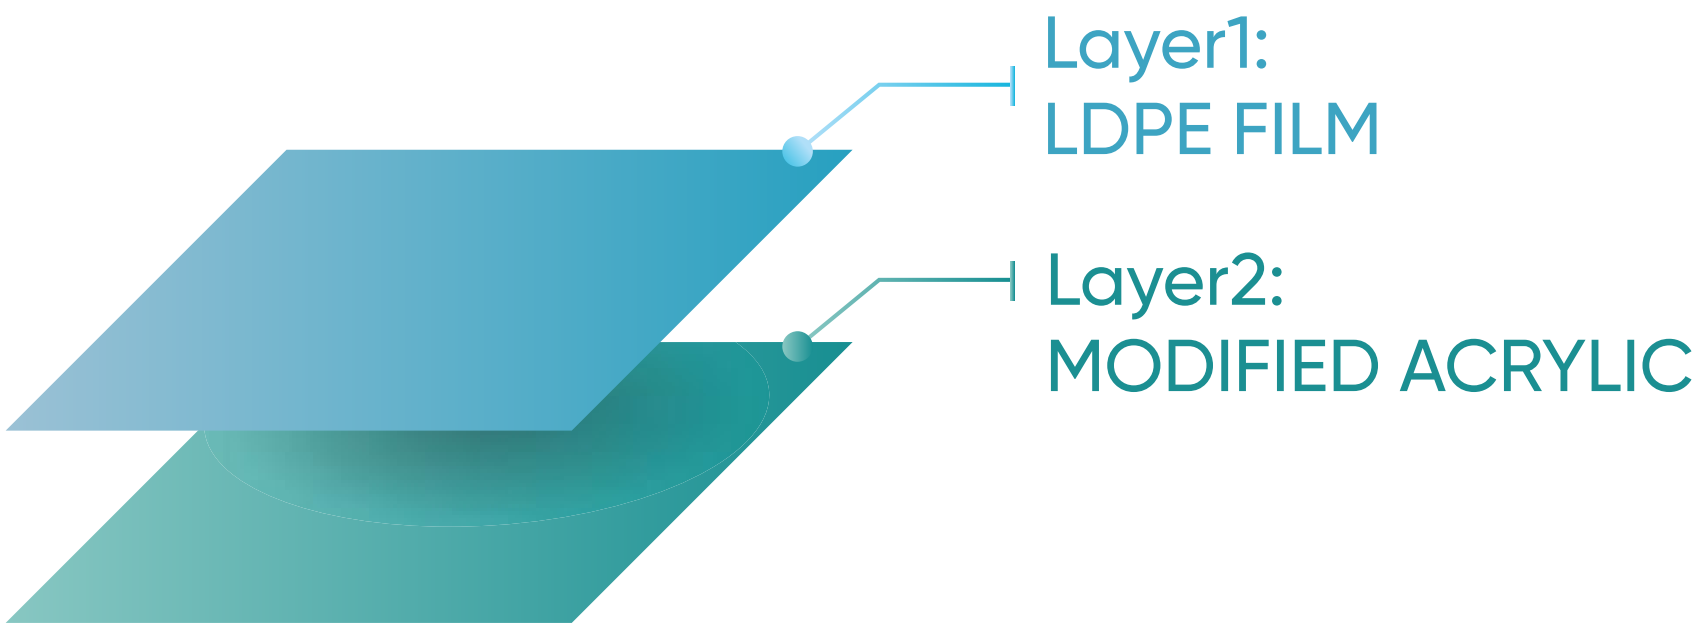

## Performance

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40BW120P	Multi-Layer LDPE Film	41µ/1.64 mil	100-120 g/in	< 24 cm	3.1 kg/in	3 moths
40BW80P	Multi-Layer LDPE Film	41µ/1.64 mil	60-80 g/in	< 24 cm	3.1 kg/in	3 moths
65BW120P	Multi-Layer LDPE Film	66µ/2.64 mil	100-120 g/in	< 20 cm	5.05 kg/in	6 months
65BW80P	Multi-Layer LDPE Film	66µ/2.64 mil	60-80 g/in	< 20 cm	5.05 kg/in	6 months

## Feature

- Modified Acrylic Adhesive For Stable Bonding
- Cross-Linked Formulation to Prevent Gum Transfer/Peel-Gain
- Easy to Apply & Remove On Variety of Surfaces
- Easy to Peel-Off

## Variants

- Colors
  - Transparent
- Slit Material
  - Width: 24mm to 1235mm
  - Length: 50mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 1235mm
  - Length: Upto 1000mtrs

## Application

- Designed for Use on Anodized/Powder-Coated Aluminium Surfaces






# LOW PEEL TAPE

Low Peel Protection Tape is specifically developed for highly reactive metals and high gloss surfaces. It offers reliable protection, preventing potential damage while maintaining the surface's original shine and finish.

These tapes are generally applied using high pressure to ensure strong adhesion. This feature allows them to stick easily and effectively, making them ideal for delicate surfaces that require extra care.

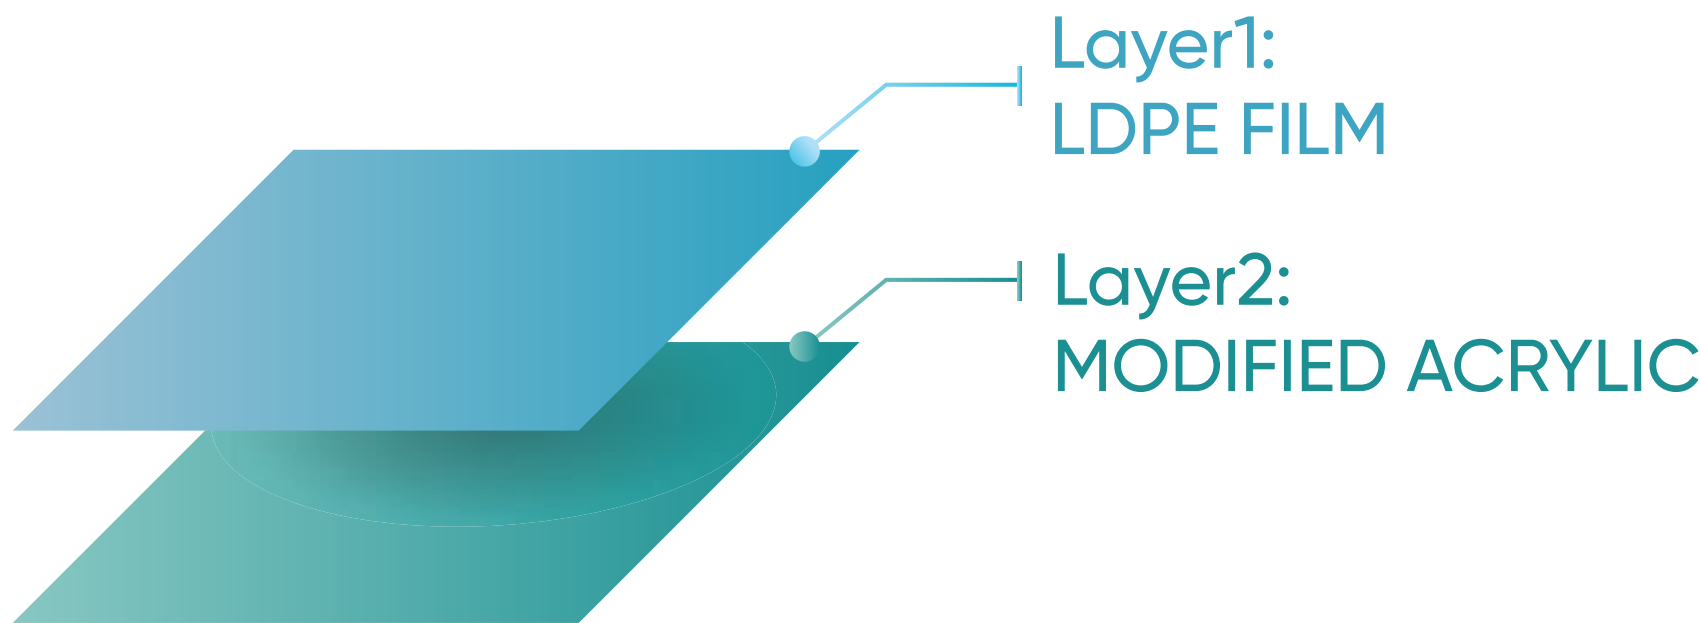

## Performance

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40NAT40P	Multi-Layer LDPE Film	41µ/1.64 mil	40-60 g/in	< 24 cm	3.1 kg/in	6 months

## Feature

- Modified Acrylic Adhesive For Stable Bonding
- Cross-Linked Formulation to Prevent Gum Transfer/Peel-Gain
- Easy to Apply & Remove On Variety of Surfaces
- Easy to Peel-Off

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 24mm to 1235mm
  - Length: 50mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 1235mm
  - Length: Upto 1000mtrs

## Application


- Used on Coated Surfaces Where The Tape is Applied With Very High Pressure



# LAMINATE TAPE

Laminate Protection Tape is designed to safeguard veneer, ply, and laminates from potential damage. It provides a durable layer of protection, ensuring the materials retain their quality and finish during various applications.

These surfaces often undergo extensive processing and transit, which increases the risk of scratches and damage. The tape helps maintain their appearance and integrity, making it essential for industries that handle delicate materials.

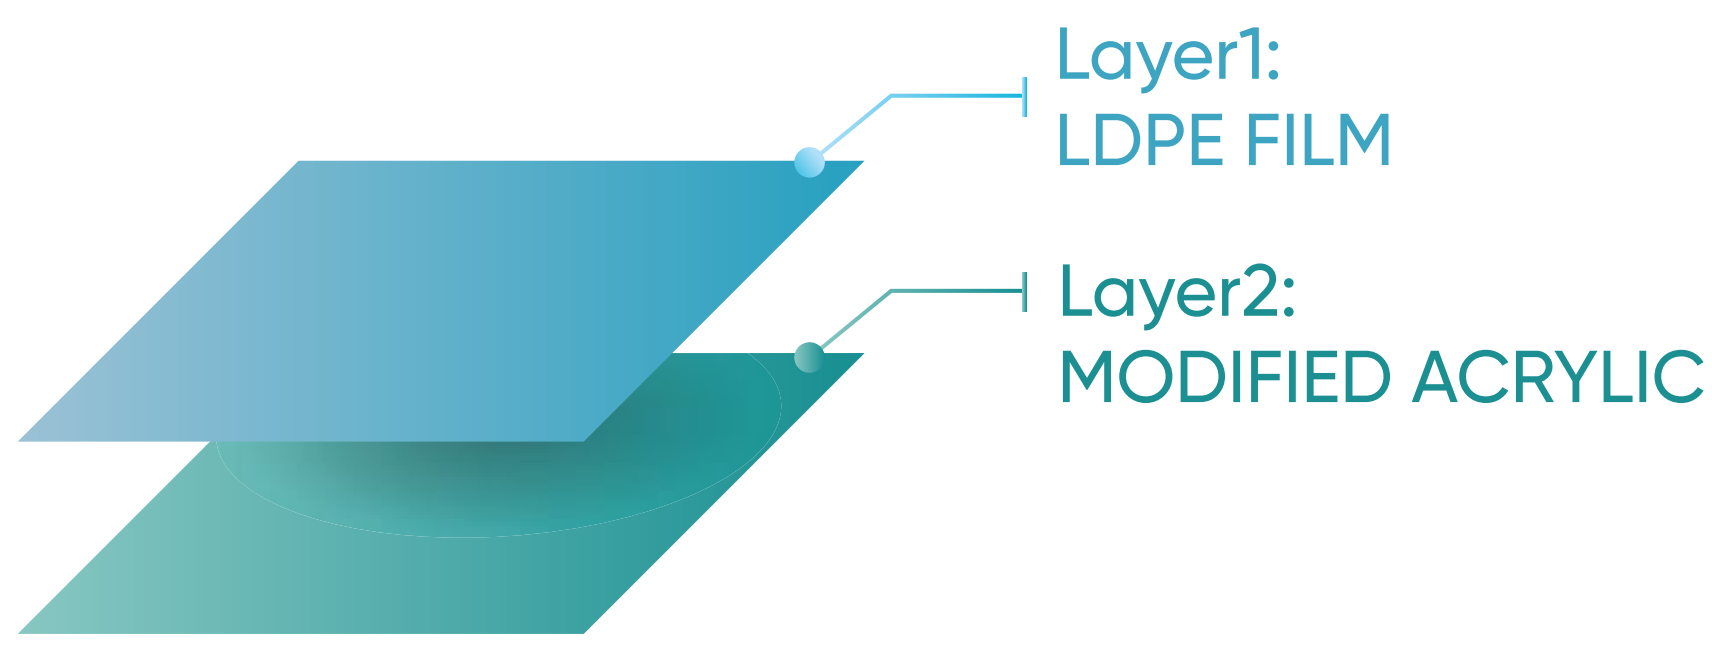

## Performance

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40NAT120P	Multi-Layer LDPE Film	41µ/1.64 mil	100-120 g/in	< 20 cm	3.1 kg/in	6 months
50NAT120P	Multi-Layer LDPE Film	51µ/2.04 mil	100-120 g/in	< 20 cm	3.4 kg/in	6 months

## Feature

- Modified Acrylic Adhesive For Stable Bonding
- Cross-Linked Formulation to Prevent Gum Transfer/Peel-Gain
- Easy to Apply & Remove On Variety of Surfaces
- Easy to Peel-Off

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 24mm to 1235mm
  - Length: 50mtr to 100mtrs
- Jumbo Rolls
  - Width: Upto 1235mm
  - Length: Upto 1000mtrs

## Application

- Used for Protection Of Veneer/Ply & Laminates






# DUCT TAPE

Duct Tape or Cloth Tape is a durable tape with a sturdy backing. It is water-resistant, strong, easy to tear, and flexible, making it highly versatile for various applications, including sealing, patching, and reinforcement in different environments.

It is very useful for quick repairs and fixes that require strong adhesive bonding. Its reliability and resilience make it a go-to solution for both household and industrial needs, ensuring long-lasting performance in demanding conditions.

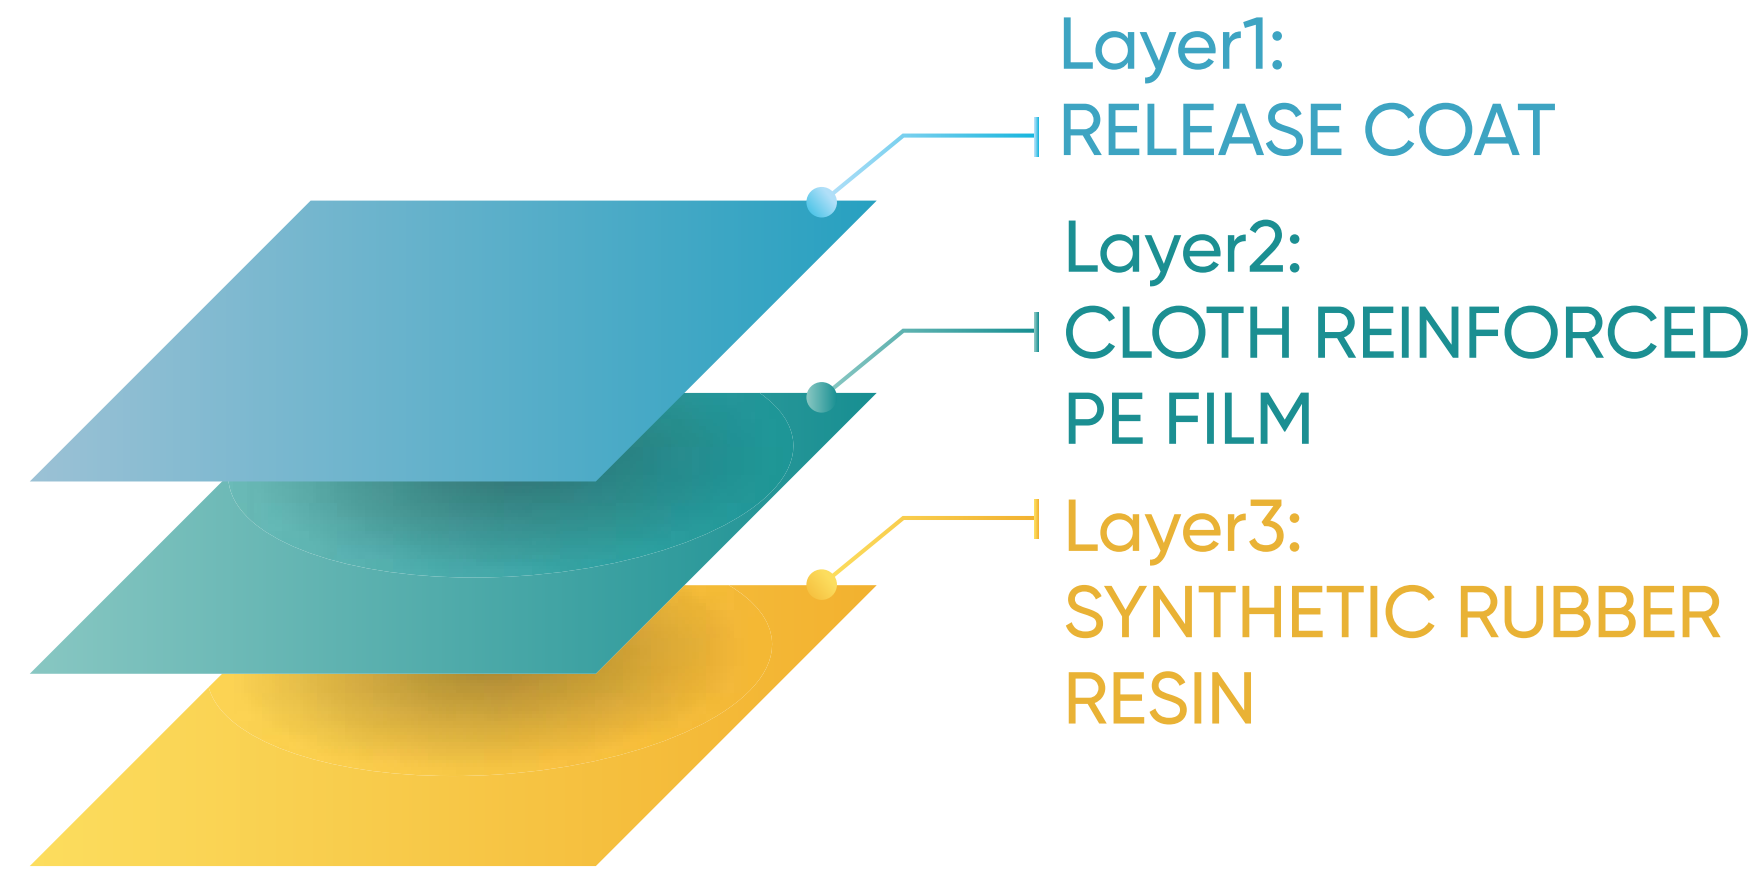

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
DT130	PE Film + Reinforced Woven Cloth	130μ/5.2 mil	> 1500 mins	> 1200 g/in	12%	> 30 N/in	- 20 C to 60 C
DT150	PE Film + Reinforced Woven Cloth	150μ/5.6 mil	> 1500 mins	> 1200 g/in	12%	> 55 N/in	- 20 C to 60 C
DT170	PE Film + Reinforced Woven Cloth	150μ/5.6 mil	> 2000 mins	> 1500 g/in	12%	> 75 N/in	- 20 C to 60 C
DT230	PE Film + Reinforced Woven Cloth	150μ/5.6 mil	> 3000 mins	> 2000 g/in	12%	> 80 N/in	- 20 C to 60 C

## Feature

- Excellent Moisture Resistance & Conformity On Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance

## Variants

- Colors
  - Silver/ Black/ White/ Red/ Green/ Dark Blue/ Yellow
- Slit Material
  - Width: 24mm to 96mm
  - Length: 10mtr to 50mtrs
- Jumbo Rolls
  - Width: Upto 1060mm
  - Length: Upto 1500mtrs

## Application


- Handling & Packing Of Heavy Objects
- Pipe Wrapping & Carpet Fixing
- HVAC Ducting- Seam and Joints Sealing



# CROSS FILAMENT TAPE

Cross Filament Tape is a high-tensile, cross-weaved reinforced tape. It features a PET film backed with fiberglass and coated with a synthetic rubber adhesive, ensuring durability and strength for various applications.

These tapes offer high adhesion, excellent resistance to breakage, and enhanced safety in use. They are ideal for heavy-duty packaging, bundling, and securing items with strong, long-lasting performance.

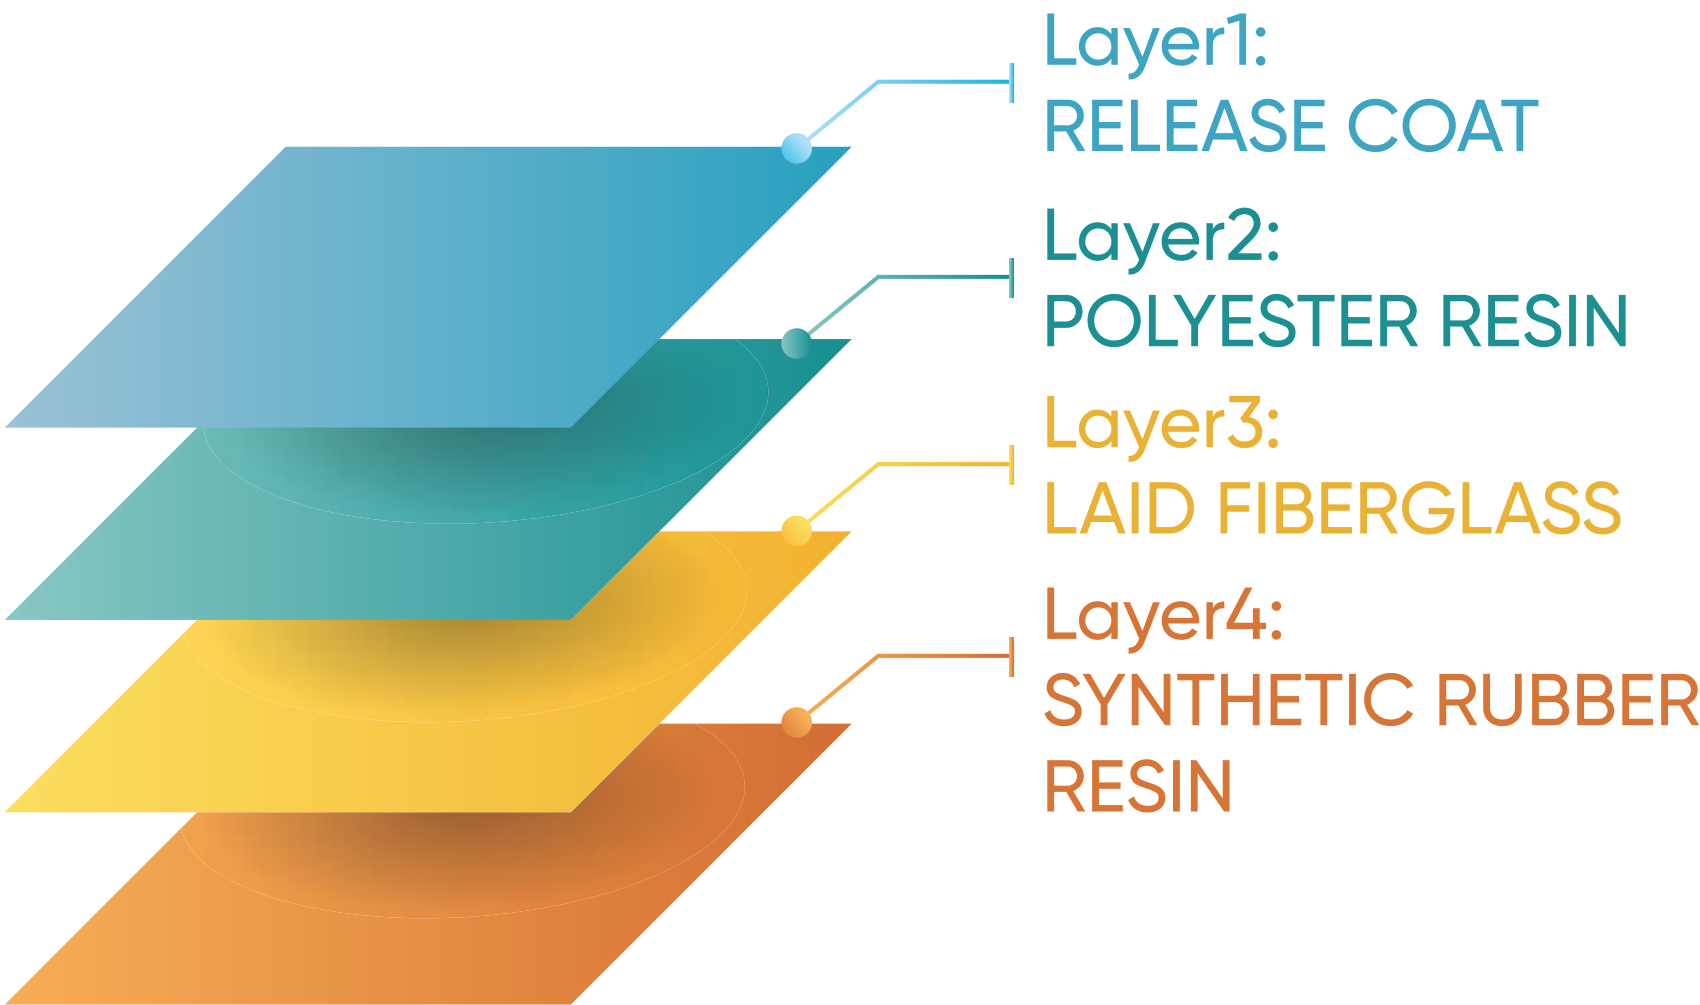

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
CFT140PTGF	Reinforced PET Film	140μ/5.6 mil	> 1500 mins	> 1850 g/in	12%	> 40 kg/in	- 5 C to 70 C

## Feature

- Strong Adhesion, High Tack, Peel & Holding Power
- Excellent Moisture Resistance & Conformity On Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has Fast Stick Ability & Good Tensile Strength

## Variants

- Colors
  - Transparent
- Slit Material
  - Width: 24mm to 72mm
  - Length: 20mtr to 50mtrs
- Jumbo Rolls
  - Width: Upto 1060mm
  - Length: Upto 1000mtrs

## Application

- Bundling of Heavy Objects like Pallets & Steel Coils
- As a Bag-Tearing Tape






# MONO FILAMENT TAPE

Mono Filament is a high-tensile strength, mono-directional reinforced tape. It features a PET film backed with fiberglass and coated with a synthetic rubber adhesive, ensuring durability and reliability in various applications.

These tapes offer high adhesion, excellent resistance to breaking, and enhanced safety during application. They are ideal for heavy-duty tasks that require strong, secure bonding and long-lasting performance.

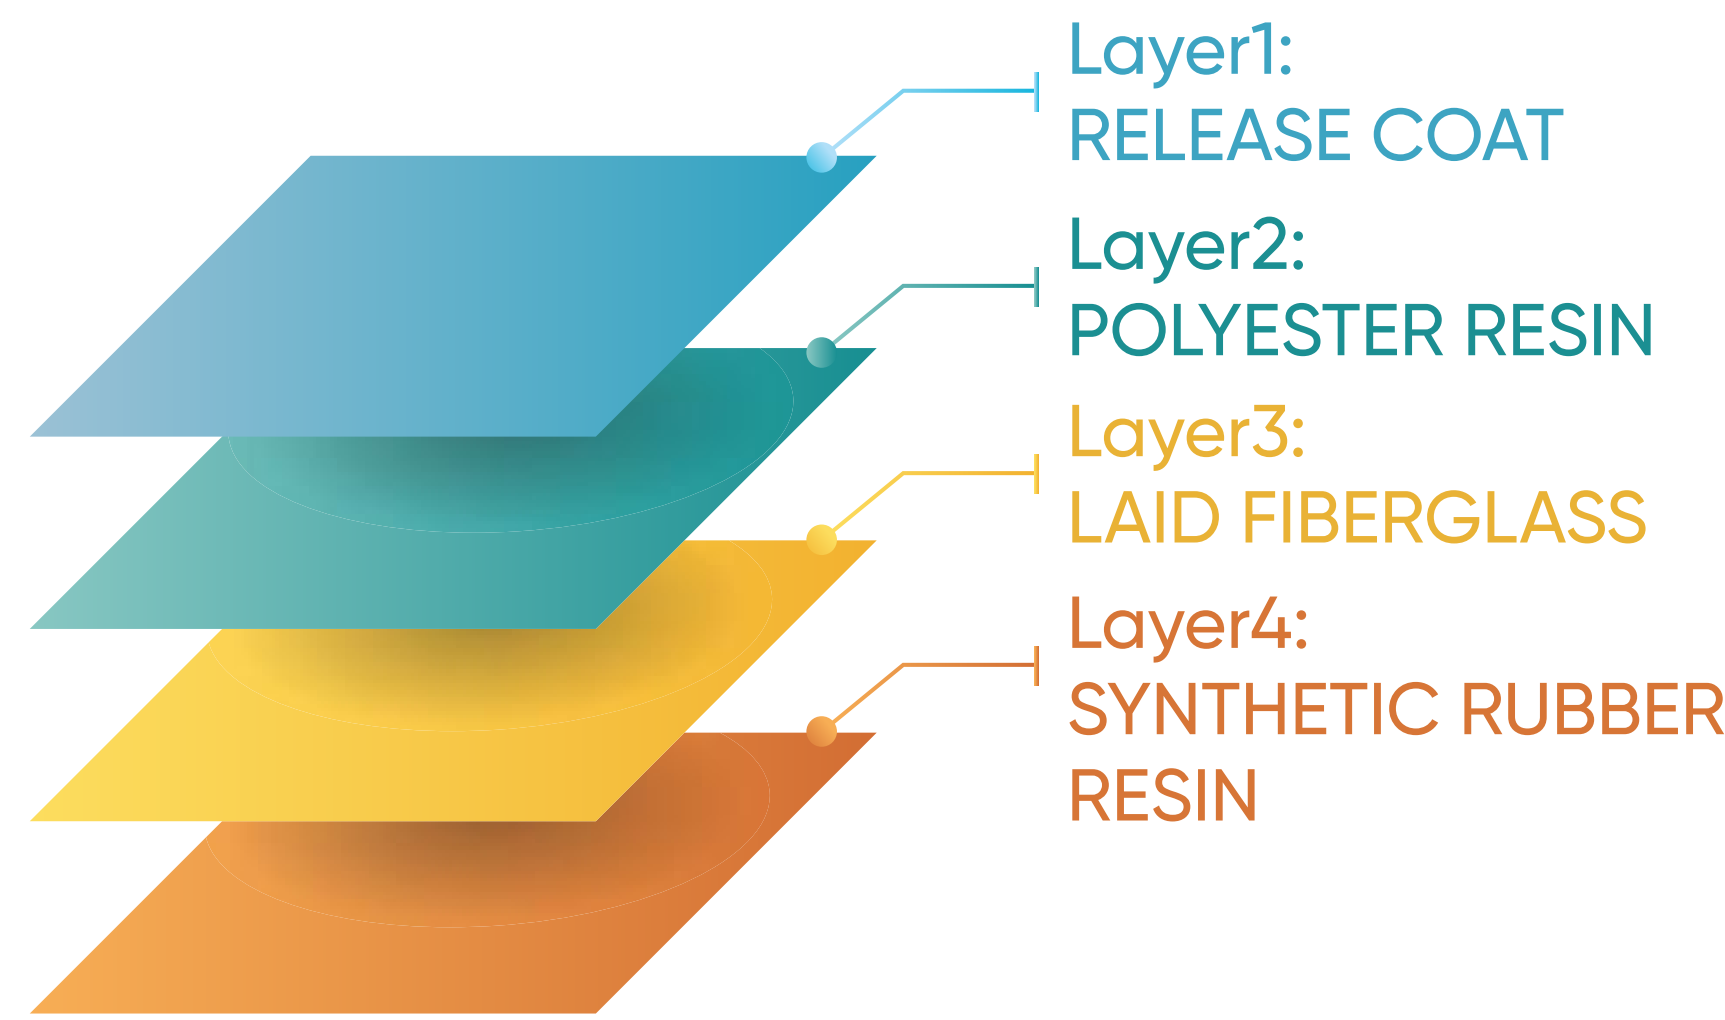

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
MFT120PPGF	Reinforced PET Film	120μ/4.8 mil	> 1500 mins	> 2350 g/in	5%	> 36 kg/in	- 5 C to 70 C

## Feature

- Strong Adhesion, High Tack, Peel & Holding Power
- Excellent Moisture Resistance & Conformity On Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has Fast Stick Ability & Good Tensile Strength

## Variants

- Colors
  - Transparent
- Slit Material
  - Width: 24mm to 72mm
  - Length: 20mtr to 50mtrs
- Jumbo Rolls
  - Width: Upto 1060mm
  - Length: Upto 1000mtrs

## Application


- Bundling of Heavy Objects like Pallets & Steel Coils
- As a Bag-Tearing Tape



# HDPE FABRIC TAPE

HDPE Fabric Tape is made from cross-weaved fabric and features a special grade of synthetic rubber adhesive. This combination provides durability, flexibility, and strong bonding for various industrial and domestic applications.

The tape adheres exceptionally well to all surfaces, offering excellent strength and reliability. It is ideal for tasks requiring a secure hold and long-lasting performance across different materials.

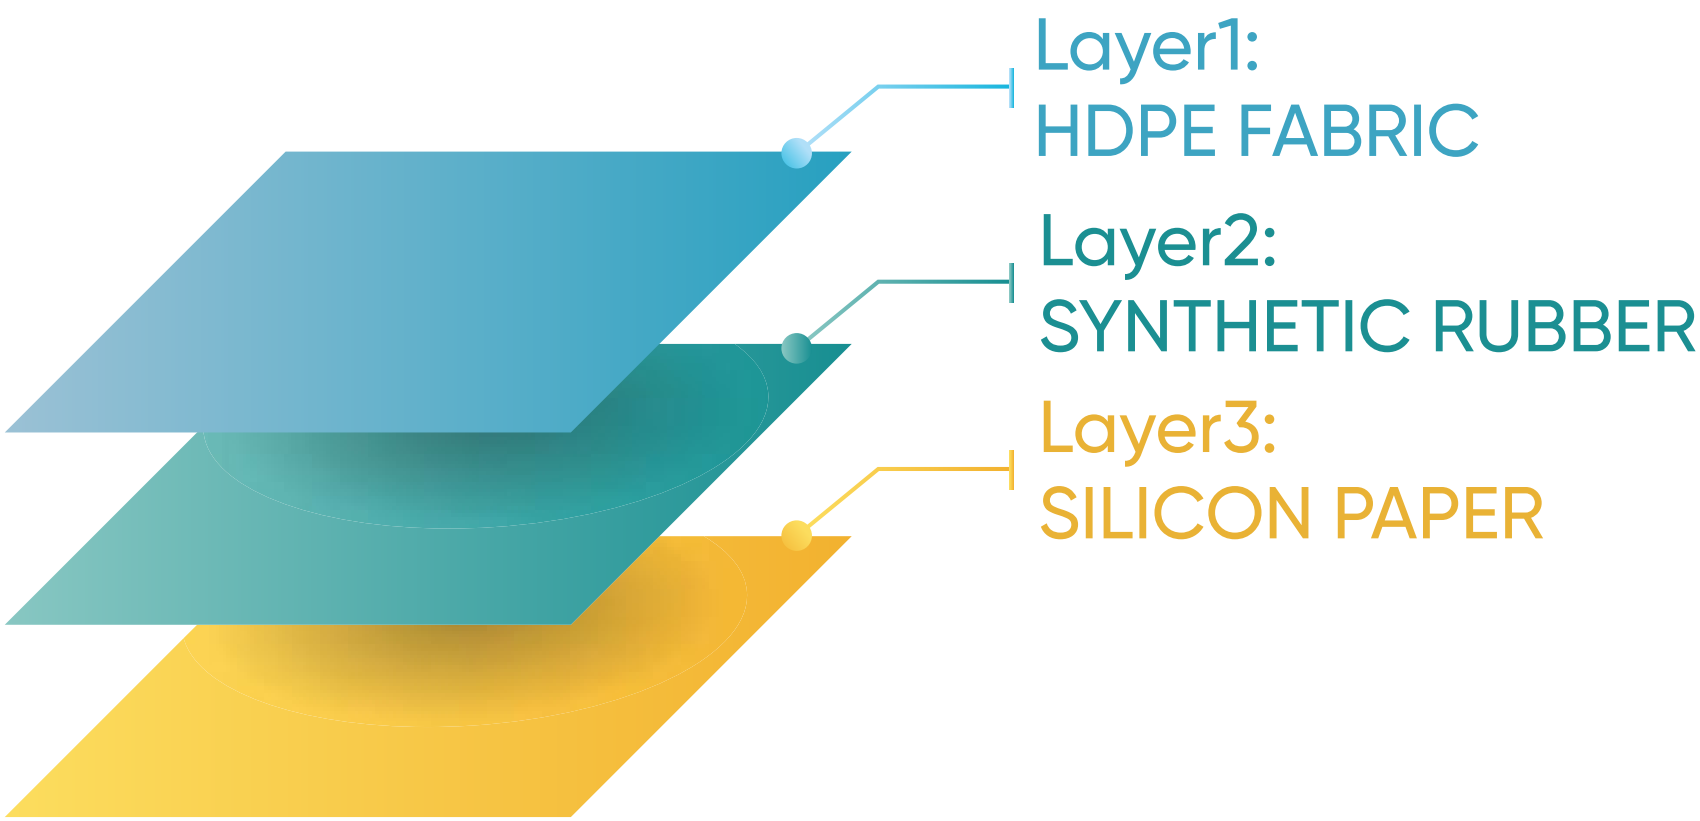

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
HDPE170	HDPE Fabric	170µ/6.8 mil	> 1500 mins	> 2300 g/in	< 5%	> 70 N/in	- 20 C to 60 C

## Feature

- Strong Adhesion, High Tack, Peel & Holding Power
- Excellent Moisture Resistance & Conformity On Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has Fast Stick Ability & Good Tensile Strength

## Variants

- Colors
  - Black/White/Blue
- Slit Material
  - Width: 24mm to 96mm
  - Length: 20mtr to 50mtrs
- Jumbo Rolls
  - Width: Upto 1010mm
  - Length: Upto 750mtrs

## Application

- Bundling & Packing Of Heavy Objects & Cartons
- Packing & Sealing HDPE Sacks






# PET HOLDING TAPE

Polyester Holding Tape features a strong film and excellent adhesive strength, ensuring easy applicability and convenient removability. It is designed for reliable performance in various industrial and domestic uses.

This tape can be effectively used at room temperature and is suitable for low to medium temperature holding applications. It offers dependable adhesion for securing materials during different processes.

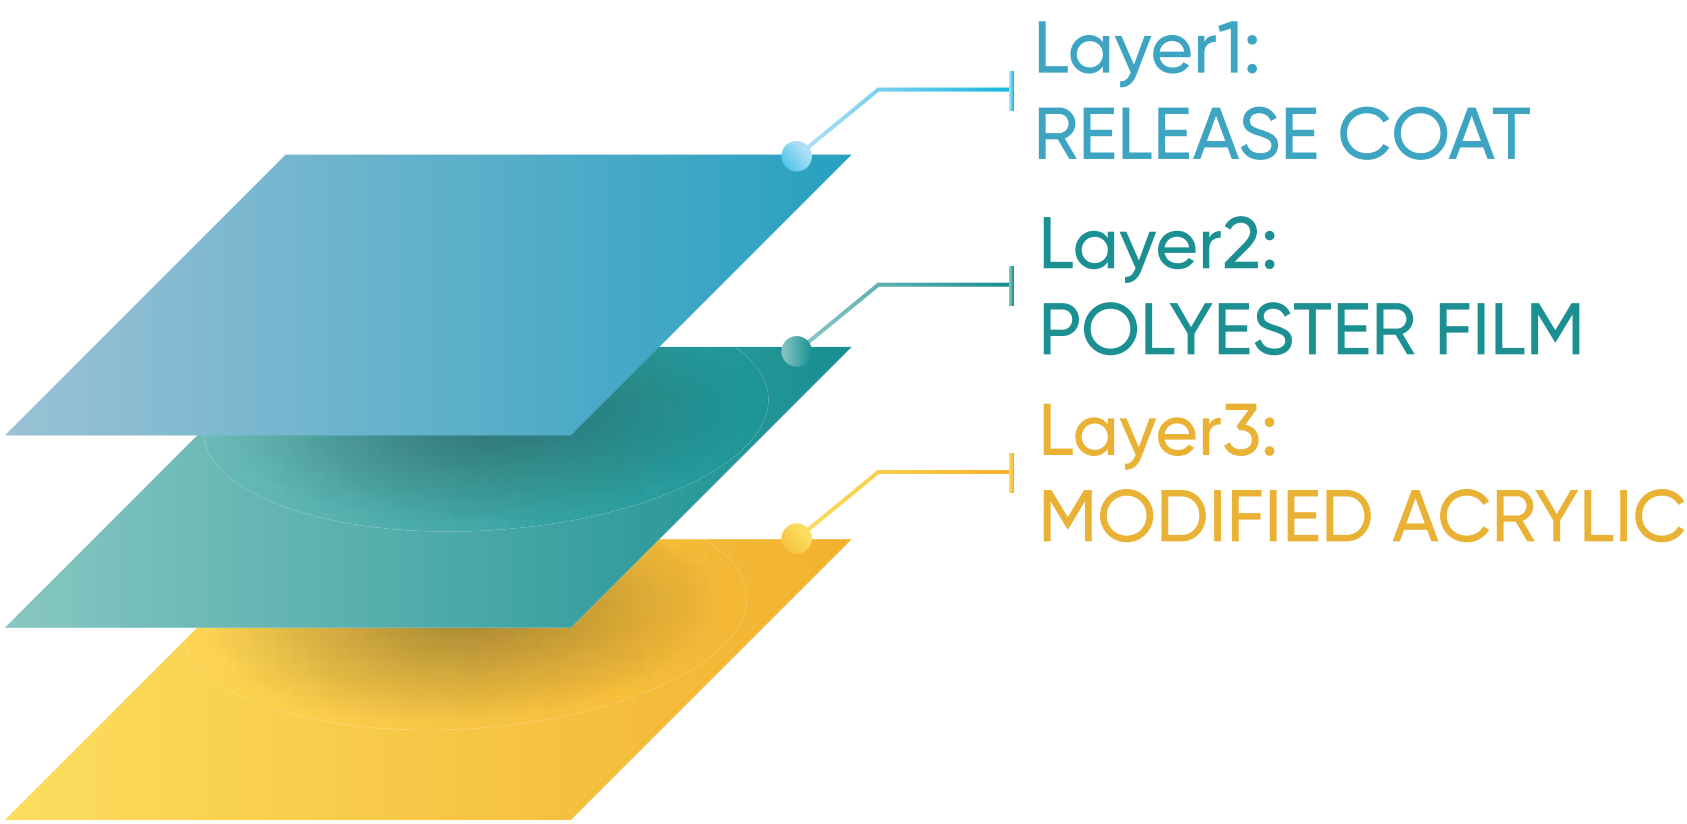

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
SSPETHT	PET Film	45μ/1.8 mil	> 3000 mins	> 6500 g/in	100%	> 6 kg/in	- 10 C to 60 C

## Feature

- Strong Adhesion, High Tack, Peel & Holding Power
- Conformity On Irregular Surfaces
- It has Fast Stick Ability & Good Tensile Strength
- High Resistance

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 24mm to 72mm
  - Length: 30mtr to 65mtrs
- Jumbo Rolls
  - Width: Upto 1220mm
  - Length: Upto 2000mtrs

## Application


- Holding Applications
- Bonding Applications
- Masking Applications



# DOUBLE SIDED PET TAPE

Double-Sided Polyester Tape is specifically designed for medium to heavy-duty splicing and mounting applications. It provides strong adhesion, making it highly suitable for various industrial and commercial uses across different environments.

This versatile tape features custom peel/shear properties available on both surfaces, ensuring flexibility, enhanced performance, and durability for specialized applications in demanding conditions.

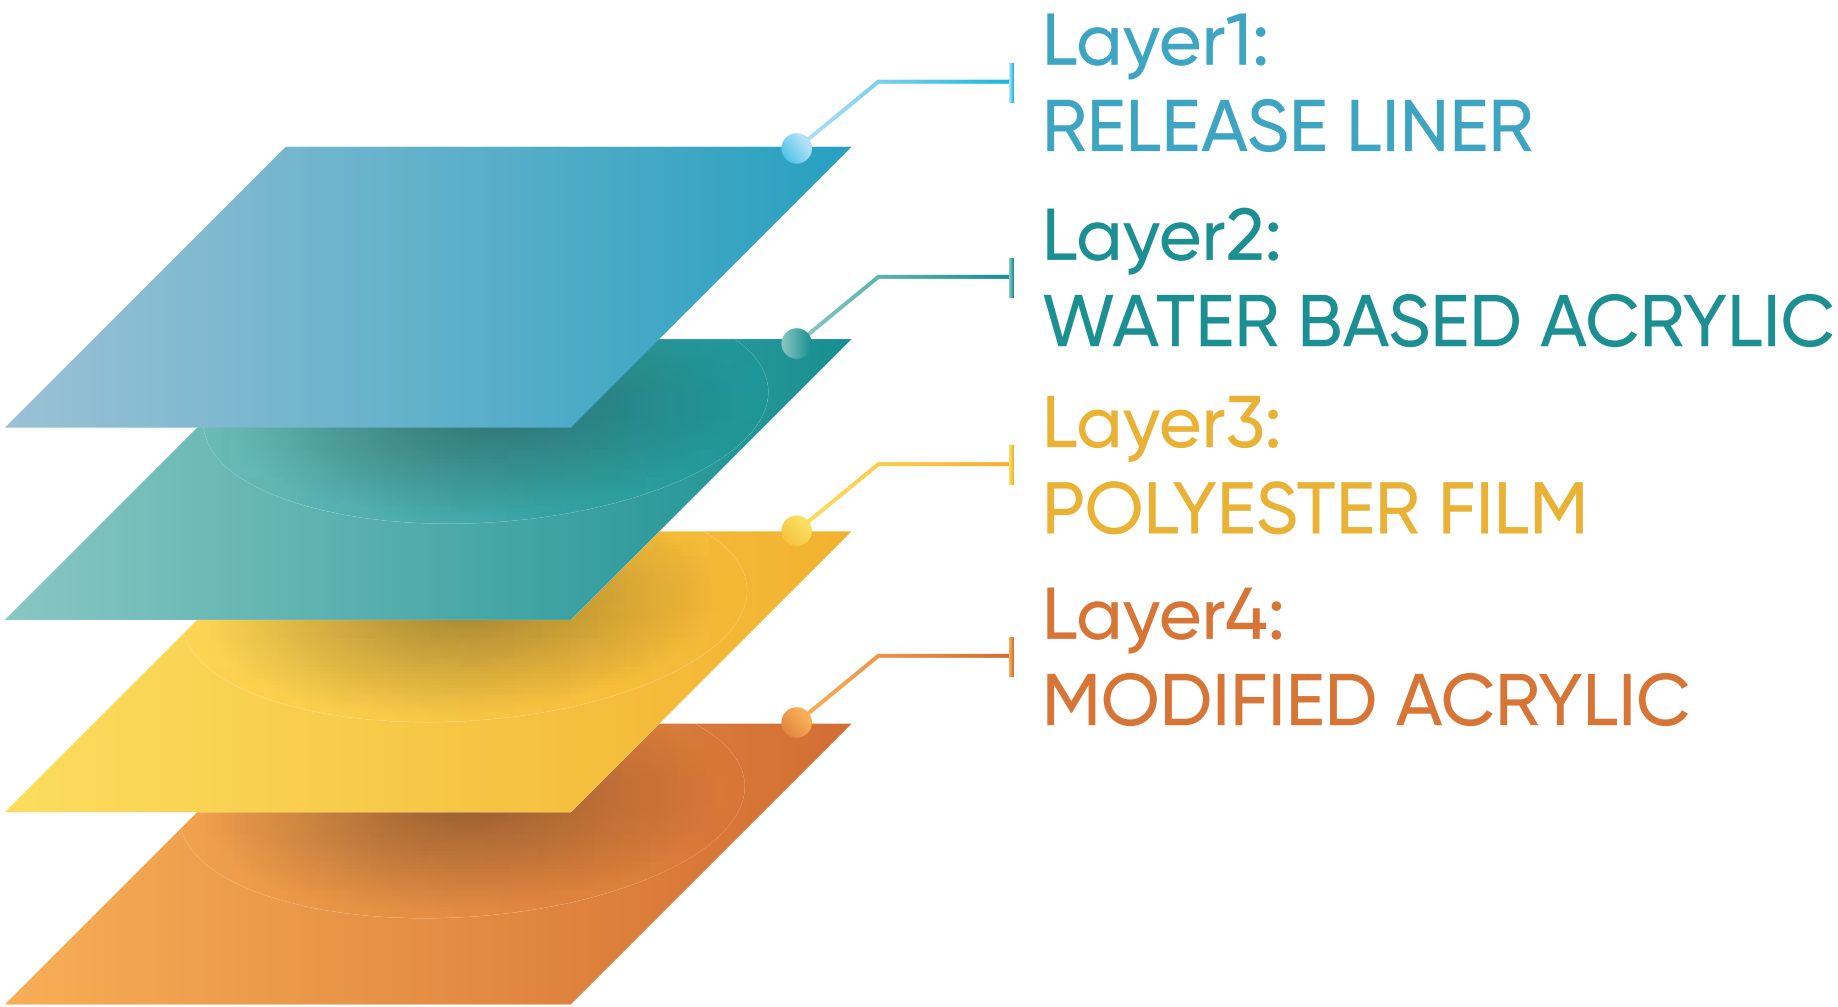

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
DSPET254040	PET Film	110µ/4.4 mil	> 2000 mins	> 1300 g/in	100%	> 6 kg/in	- 10 C to 100 C

## Feature

- Strong Adhesion, High Tack, Peel & Holding Power
- Conformity On Irregular Surfaces
- It has Fast Stick Ability & Good Tensile Strength
- High Resistance

## Variants

- Colors
  - Transparent
  - Red
- Slit Material
  - Width: 24mm to 72mm
  - Length: 30mtr to 65mtrs
- Jumbo Rolls
  - Width: Upto 1220mm
  - Length: Upto 2000mtrs

## Application

- Heavy-Duty Splicing & Mounting Applications






# RECYCLED TAPE

Recycled PET tape contains over 80% polyester derived from recycled PET bottles. This promotes sustainability by creating a demand for recycling, reducing waste that would otherwise remain in landfills for hundreds of years.

These thinner tapes offer enhanced strength and durability, with up to 20% lower plastic usage per tape. This makes them an eco-friendly solution for various industrial and packaging applications.

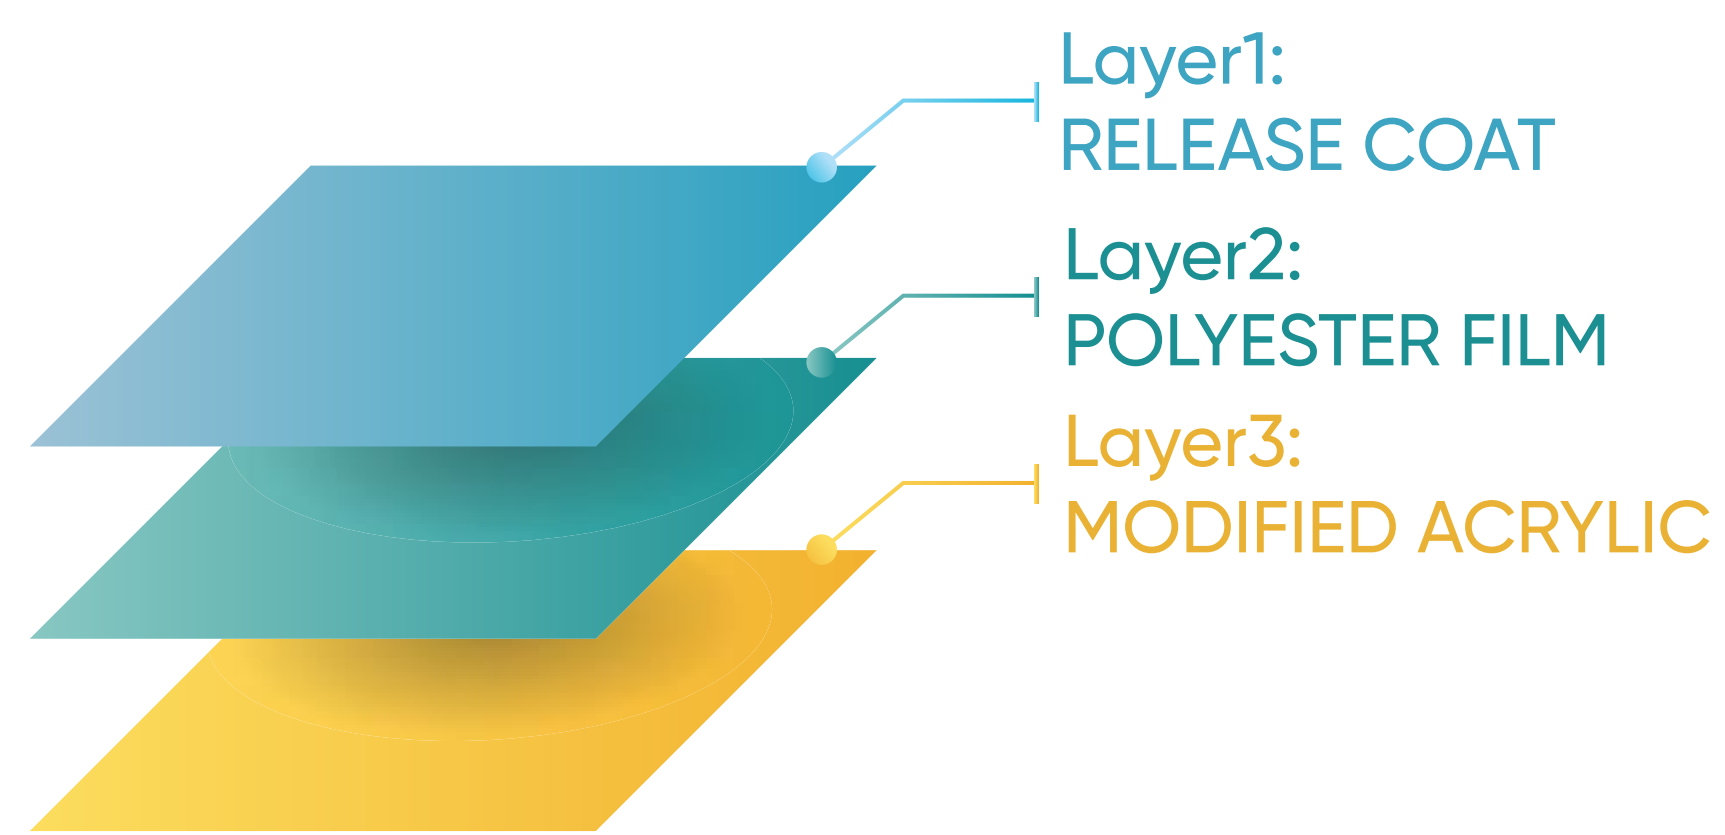

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
PCR12	PET Film	32µ/1.28 mil	> 2000 mins	> 600 g/in	100%	> 4 kg/in	- 10 C to 100 C
PCR18	PET Film	38µ/1.52 mil	> 2000 mins	> 600 g/in	100%	> 4.6 kg/in	- 10 C to 100 C

## Feature

- 80% Post-Consumer Recycled (PCR) PET Backing
- Offers Excellent Printability
- Suitable for Manual & Automatic Dispensing

## Variants

- Colors
  - Transparent
  - Custom Colors
- Slit Material
  - Width: 24mm to 72mm
  - Length: 30mtr to 2000mtrs
- Jumbo Rolls
  - Width: Upto 1220mm
  - Length: Upto 2000mtrs

## Application


- Light-Medium Duty Packaging
- General Bonding & Sealing



# ALUMINIUM FOIL TAPE

Aluminum Foil Tape uses aluminum foil as the backing material and is coated on one side with acrylic adhesive. This combination provides durability and strong adhesion, making it ideal for various industrial and insulation purposes.

The tape possesses excellent electric and heat conductivity, making it highly suitable for thermal insulation, electrical repairs, and HVAC systems. It is also resistant to moisture, chemicals, and UV degradation.

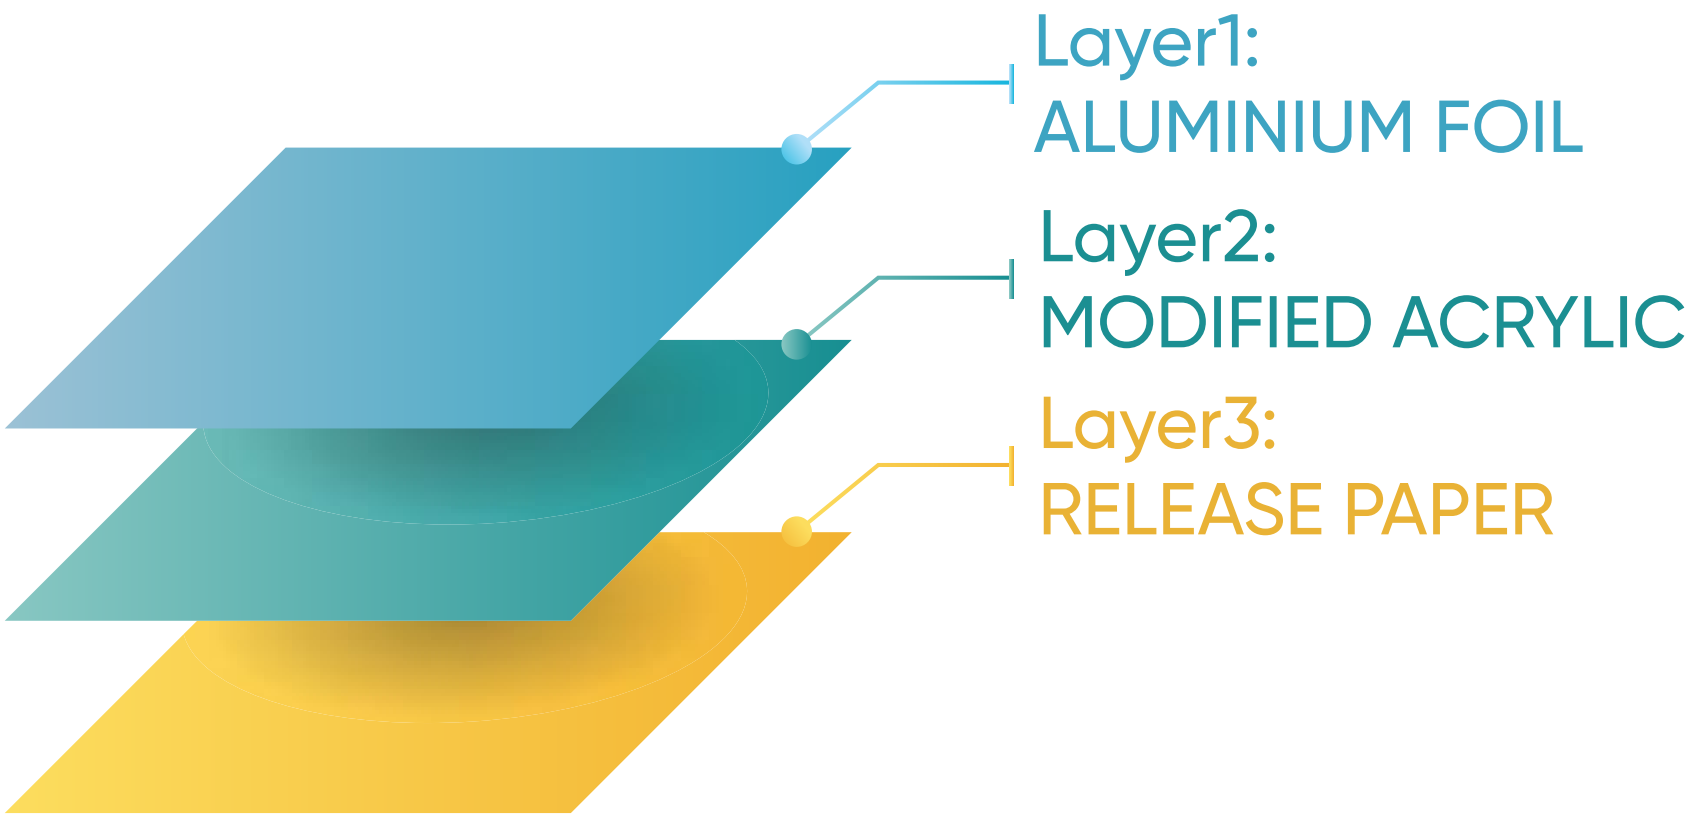

## Performance

Product Code	Backing	Backing Thickness	Total Thickness	Peel	Tensile	Temperature Resistance
ALU20LIN	Aluminium Foil	20μ	45μ/1.8 mil	> 550 g/in	> 3.6 kg/in	-10 C to 90 C
ALU30LIN	Aluminium Foil	30μ	55μ/2.2 mil	> 550 g/in	> 4.5 kg/in	-10 C to 90 C
ALU40LIN	Aluminium Foil	40μ	65μ/2.6 mil	> 550 g/in	> 6 kg/in	-10 C to 90 C

## Feature

- Very High Vapor Barrier
- Good Heat Conductivity
- Easy to Unwind & Tear
- Good Electrical Conductivity
- UV Resistant

## Variants

- Colors
  - Silver
- Slit Material
  - Width: 24mm to 72mm
  - Length: 15mtr to 50mtrs

## Application

- Sealing Joints & Seams of Irregular Metal Surfaces
- HVAC, Refrigerator Industry and Metal Patching
- Shielding Application For Motors, Cables, Cabinets, Antennae






# PVC TAPE

PVC Floor Marking Tape is used for demarcating areas in industrial and warehouse complexes. It helps in organizing spaces efficiently, ensuring safety and better workflow management.

Designed to last long without damaging the floor, unlike paints, it can withstand heavy industrial movement. This tape is durable, easy to apply, and resistant to wear and tear from constant foot and machinery traffic.

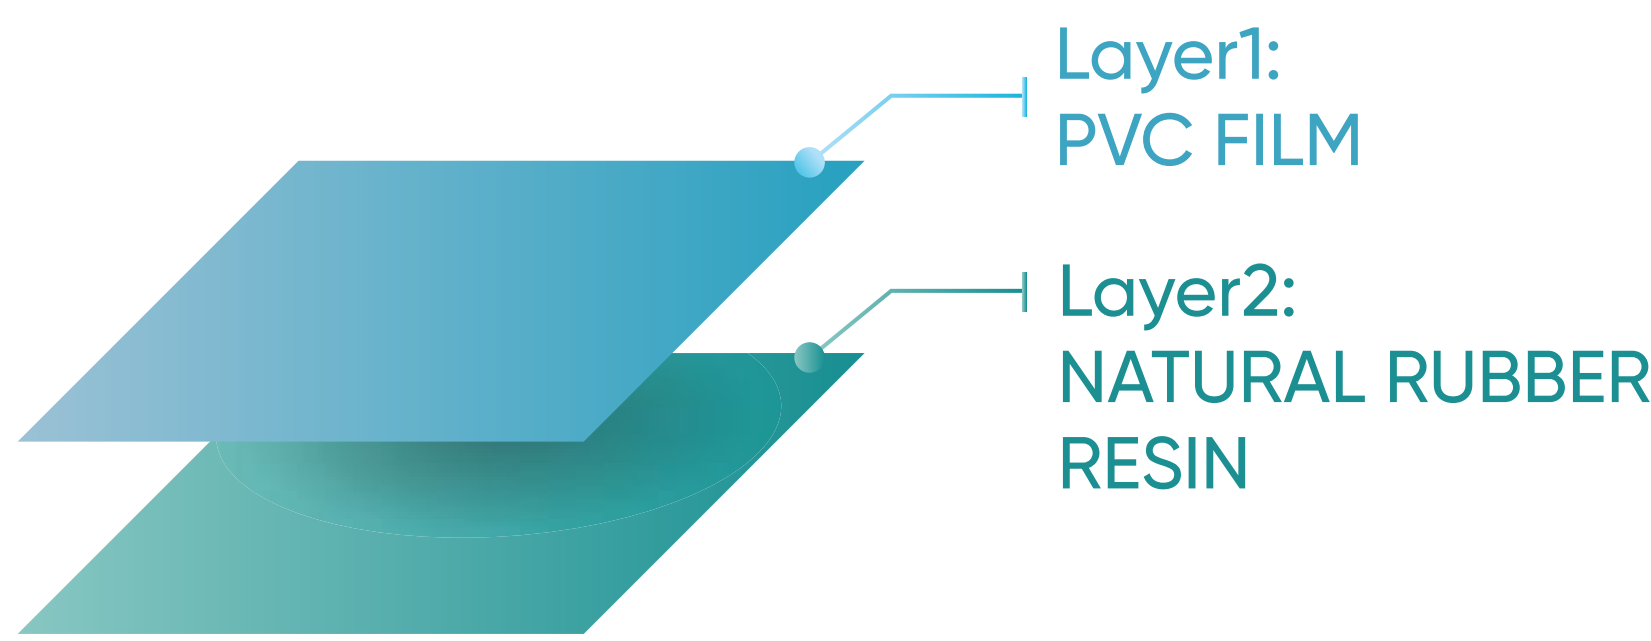

## Performance

Product Code	Backing	Total Thickness	Dart Impact	Peel	Tensile	Elongation	Shelf Life
FMT25150	PVC Film	150µ/6 mil	> 1100 gms	> 400 g/in	> 4.5 kg/in	100%	1 Year

## Feature

- Flexibility: Ultimate Versatility
- No Lifting or Curling
- Can Withstand Heavy Industrial Movement

## Variants

- Colors
  - Red/Yellow/Green/Blue/Blue & White/Red & White /Black & Yellow
- Slit Material
  - Width: 36mm to 72mm
  - Length: 18mtr to 33mtrs

## Application


- Demarking Areas in Industrial and Warehouse Complexes



# ULTRA TAPE

Ultra Floor Marking Tape (uFMT) is 5 times stronger and 10 times longer-lasting. It is primarily used for demarcating areas in industrial and warehouse complexes, ensuring clear and organized spaces.

Designed to last without damaging the floor, unlike paints, it can withstand heavy forklift traffic and industrial movements. Its durability makes it ideal for high-traffic areas, offering reliable performance over time.

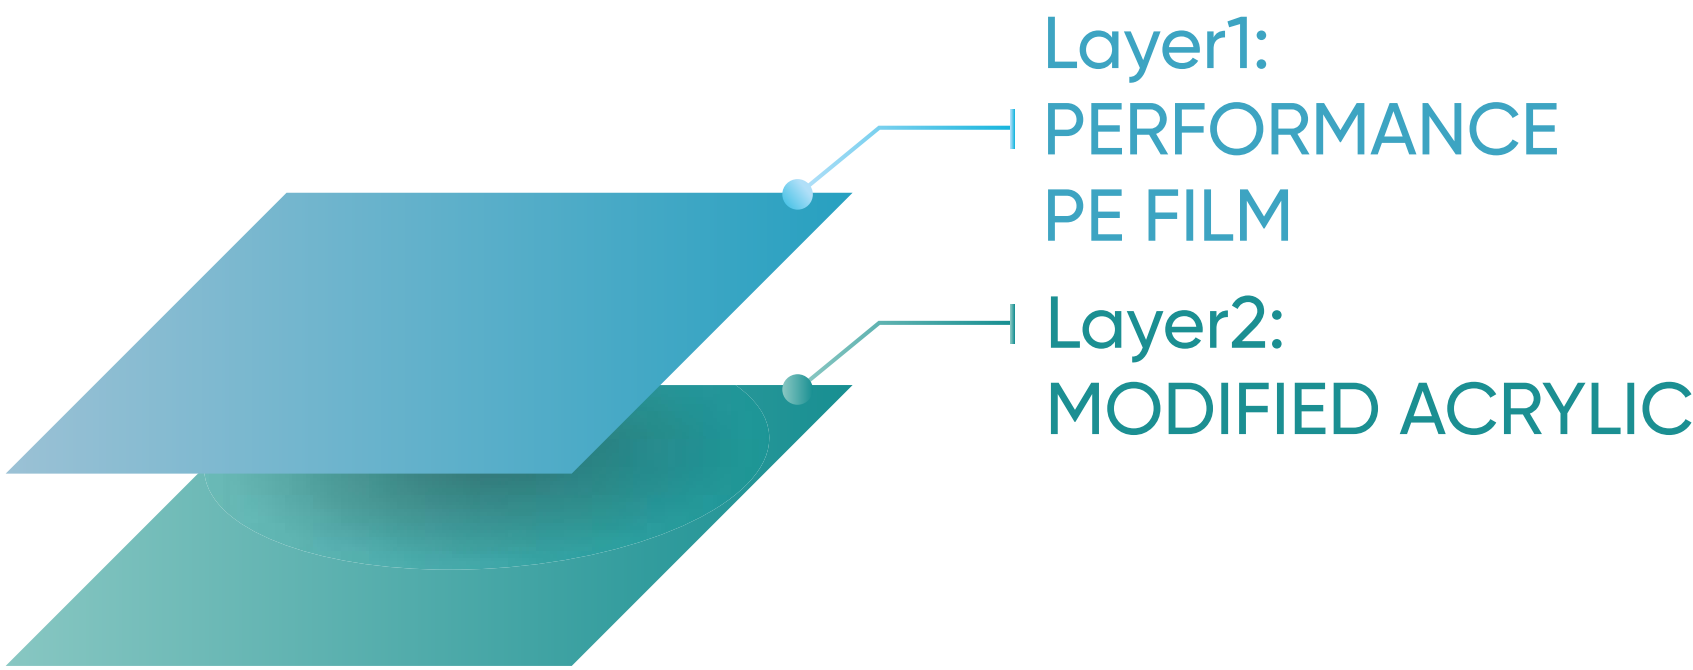

## Performance

Product Code	Backing	Total Thickness	Dart Impact	Peel	Tensile	Elongation	Shelf Life
uFMT12525	Performance PE Film	150µ/6 mil	> 1400 gms	> 500 g/in	> 5.5 kg/in	500%	10 Years

## Feature

- 5x Times Stronger & 10x Long-Lasting
- UV Reistant
- No Lifting or Curling
- Can Withstand Heavy Industrial Movement
- Flexibility: Ultimate Versatility
- PVC Free

## Variants

- Colors
  - Red/Yellow/Green/Blue/Blue & White/Red & White / Black & Yellow
  - Custom Colors
- Slit Material
  - Width: 36mm to 144mm
  - Length: 18mtr to 33mtrs

## Application

- Demarking Areas in Industrial and Warehouse Complexes






# WARNING TAPE

Warning tapes or Caution Tapes are used to alert or grab attention. They highlight areas that may pose danger or risk, ensuring people stay cautious around hazardous zones, construction sites, or restricted areas.

These tapes are essential in situations where there is a threat to life or safety. They serve as a clear visual signal, effectively preventing accidents by marking unsafe areas and promoting public awareness.

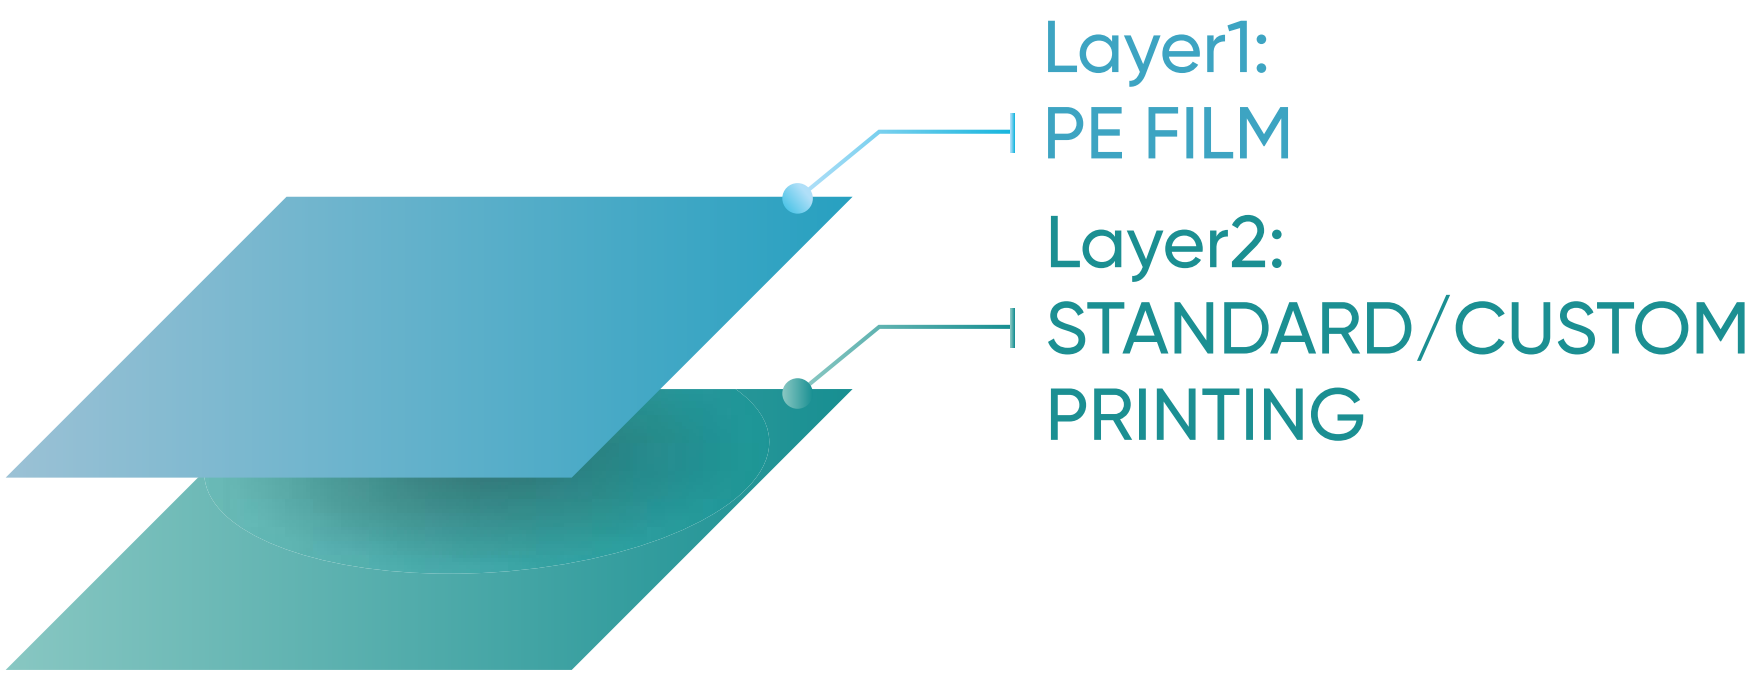

## Performance

Product Code	Backing	Total Thickness
PEWT25	PE Film	25μ/1 mil
PEWT30	PE Film	30μ/1.2 mil
PEWT40	PE Film	40μ/1.6 mil
PEWT70	PE Film	70μ/2.8 mil

## Feature

- Signifies Restricted Access to Hazardous Areas
- Warns & Alerts Pedestrians Of Danger in Both Small & Large Areas
- Difficult to Tear, Hence Providing Additional Security

## Variants

- Colors
  - Red & White / Black & Yellow
  - Custom Colors
- Slit Material
  - Width: 70mm to 100mm
  - Length: 100mtr to 1000mtrs

## Application


- Marking at Construction Sites
- Maintenance & Repair Operations
- Solar & Wind Power Facilities
- Irrigation & Mining Areas



# PVC INSULATION TAPE

inVOLT PVC Insulation Tapes provide excellent flame retardancy and offer strong weather resistance. These tapes are designed to withstand various environmental conditions, ensuring reliable performance in diverse applications.

Besides being effective, they offer long-lasting insulation, making them ideal for electrical and industrial uses. Their durability and safety features make them a dependable choice for both professionals and DIY enthusiasts.

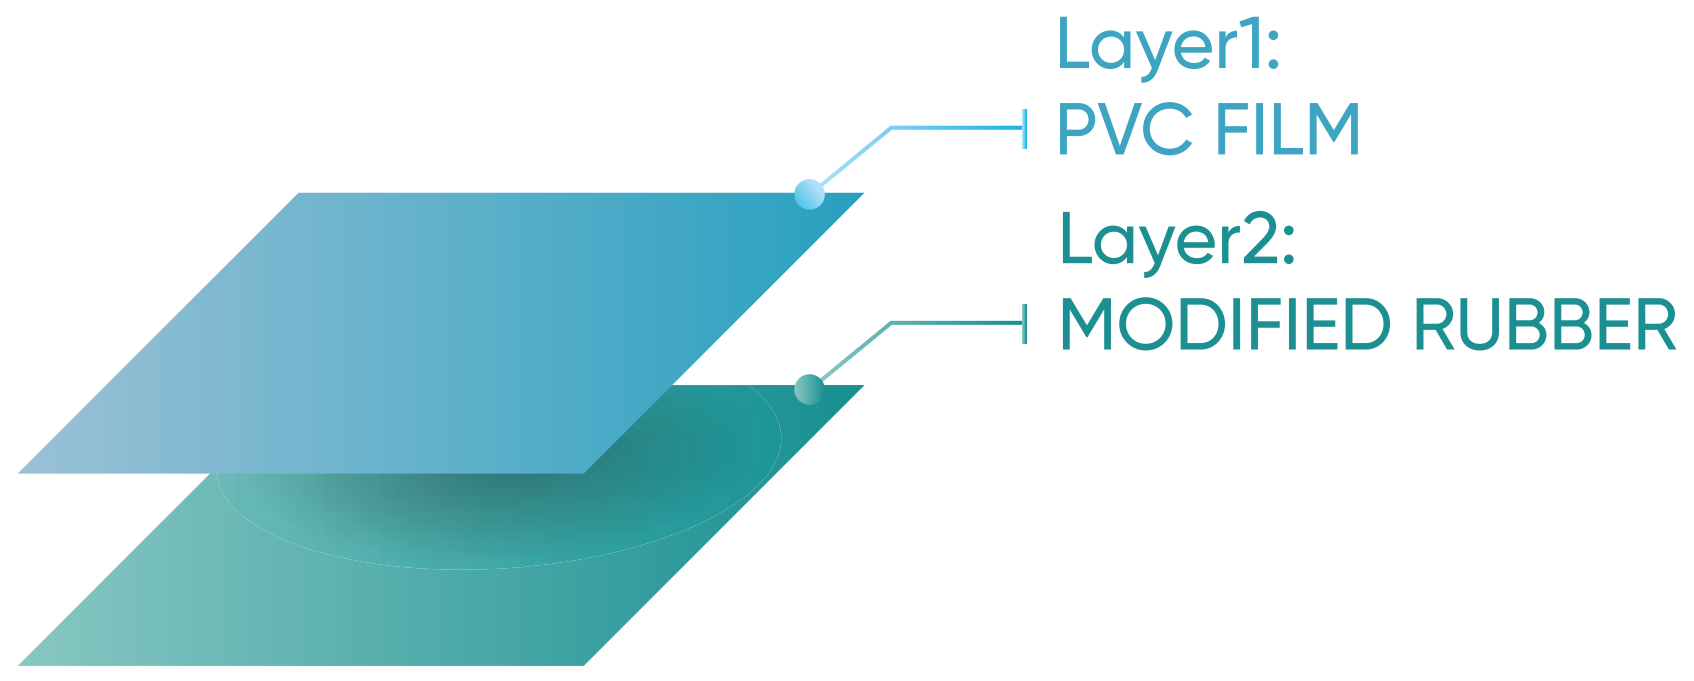

## Performance

Product Code	Backing	Total Thickness	Dielectric Strength (Volts)	Elongation	Shelf Life	Service Temperature
inVOLT125	PVC Film	125μ	> 7000	100%	1 Year	-5 C to 60 C

## Feature

- High Conformability
- Strong Adhesion & Holding Power
- Fire Retardant
- Excellent Electrical & Insulation Properties

## Variants

- Colors
  - Yellow/ Black/ Green/ Blue/ Red
- Slit Material
  - Width: 12mm to 72mm
  - Length: 5mtr to 10mtrs
- Jumbo Rolls
  - Width: Upto 1250mm
  - Length: 5mtr to 10mtrs

## Application

- For Permanent Joining / Bonding For Wires & Cables
- For Protecting Loose Electrical Wire Ends






# PE INSULATION TAPE

The world's first PE-based electric insulation tapes offer high elasticity, extreme elongation, and superior electrical resistance compared to PVC. These features make them highly effective for various electrical applications.

The tapes also boast a wide service temperature range. They are ROHS-compliant, fire retardant, and provide excellent safety, durability, flexibility, and long-lasting performance in demanding industrial, commercial, and residential conditions.

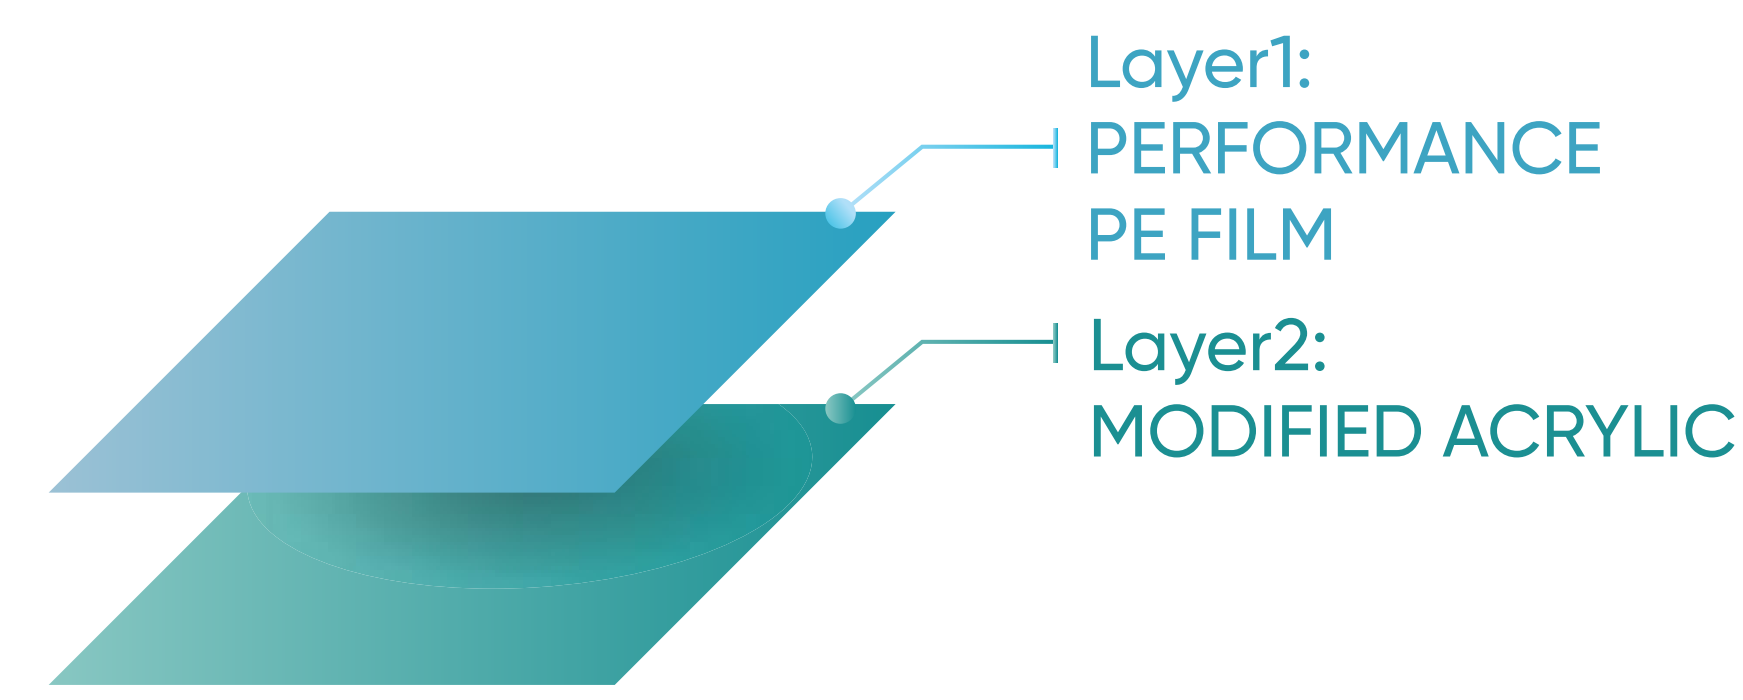

## Performance

Product Code	Backing	Total Thickness	Dielectric Strength (Volts)	Elongation	Shelf Life	Service Temperature
inVOLTPlus110	PE Film	110μ	> 8000	500%	5 Years	-20 C to 80 C

## Feature

- High Conformability
- UV Resistant
- PVC Free
- Strong Adhesion & Holding Power
- Excellent Electrical & Insulation Properties

## Variants

- Colors
  - Yellow/ Black/ Green/ Blue/ Red/ White/ Orange
- Slit Material
  - Width: 12mm to 72mm
  - Length: 4mtr to 66mtrs
- Jumbo Rolls
  - Width: Upto 1030mm
  - Length: 4mtr to 66mtrs

## Application


- For Permanent Joining / Bonding For Wires & Cables
- For Protecting Loose Electrical Wire Ends



# MX WONDER TAPE

The world's first PE-based electric insulation tapes offer high elasticity, extreme elongation, and superior electrical resistance compared to PVC.

These tapes have a wide service temperature range. They are ROHS-compliant, made with FR grade material for enhanced fire safety, and are fire retardant. They provide excellent durability, flexibility, and reliable performance in industrial, commercial, and residential conditions.

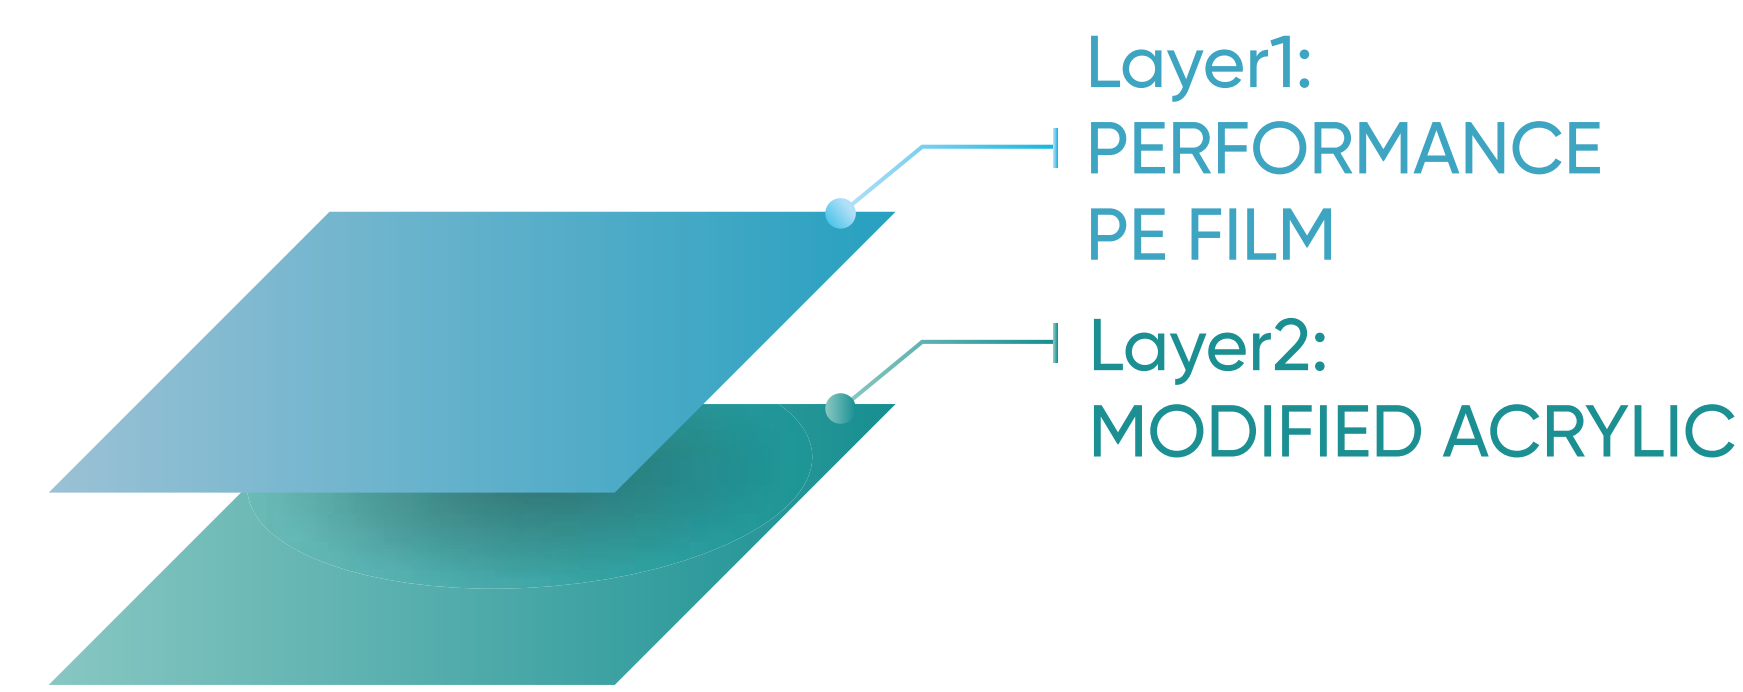

## Performance

Product Code	Backing	Total Thickness	Dielectric Strength (Volts)	Elongation	Shelf Life	Service Temperature
Mxwon110	PE Film	110μ	> 8000	500%	1 Year	-20 C to 80 C

## Feature

- High Conformability
- UV Resistant
- PVC Free
- Strong Adhesion & Holding Power
- Excellent Electrical & Insulation Properties
- Non-FR Grade

## Variants

- Colors
  - Yellow/ Black/ Green/ Blue/ Red/ White/ Orange
- Slit Material
  - Width: 12mm to 72mm
  - Length: 4mtr to 66mtrs
- Jumbo Rolls
  - Width: Upto 1030mm
  - Length: 4mtr to 66mtrs

## Application

- For Permanent Joining / Bonding For Wires & Cables
- For Protecting Loose Electrical Wire Ends






# AIR VENTILATION TAPE

Air Ventilation Tapes are used during foam forming in sandwich panels made of metals, composites, and plastics. They play a crucial role in ensuring proper ventilation during the manufacturing process.

When applied on air vents of a panel where PU or PIR foam is being formed, the tape allows hot air to pass through efficiently. It also provides a strong barrier against foam liquid and solid, preventing unwanted leakage.

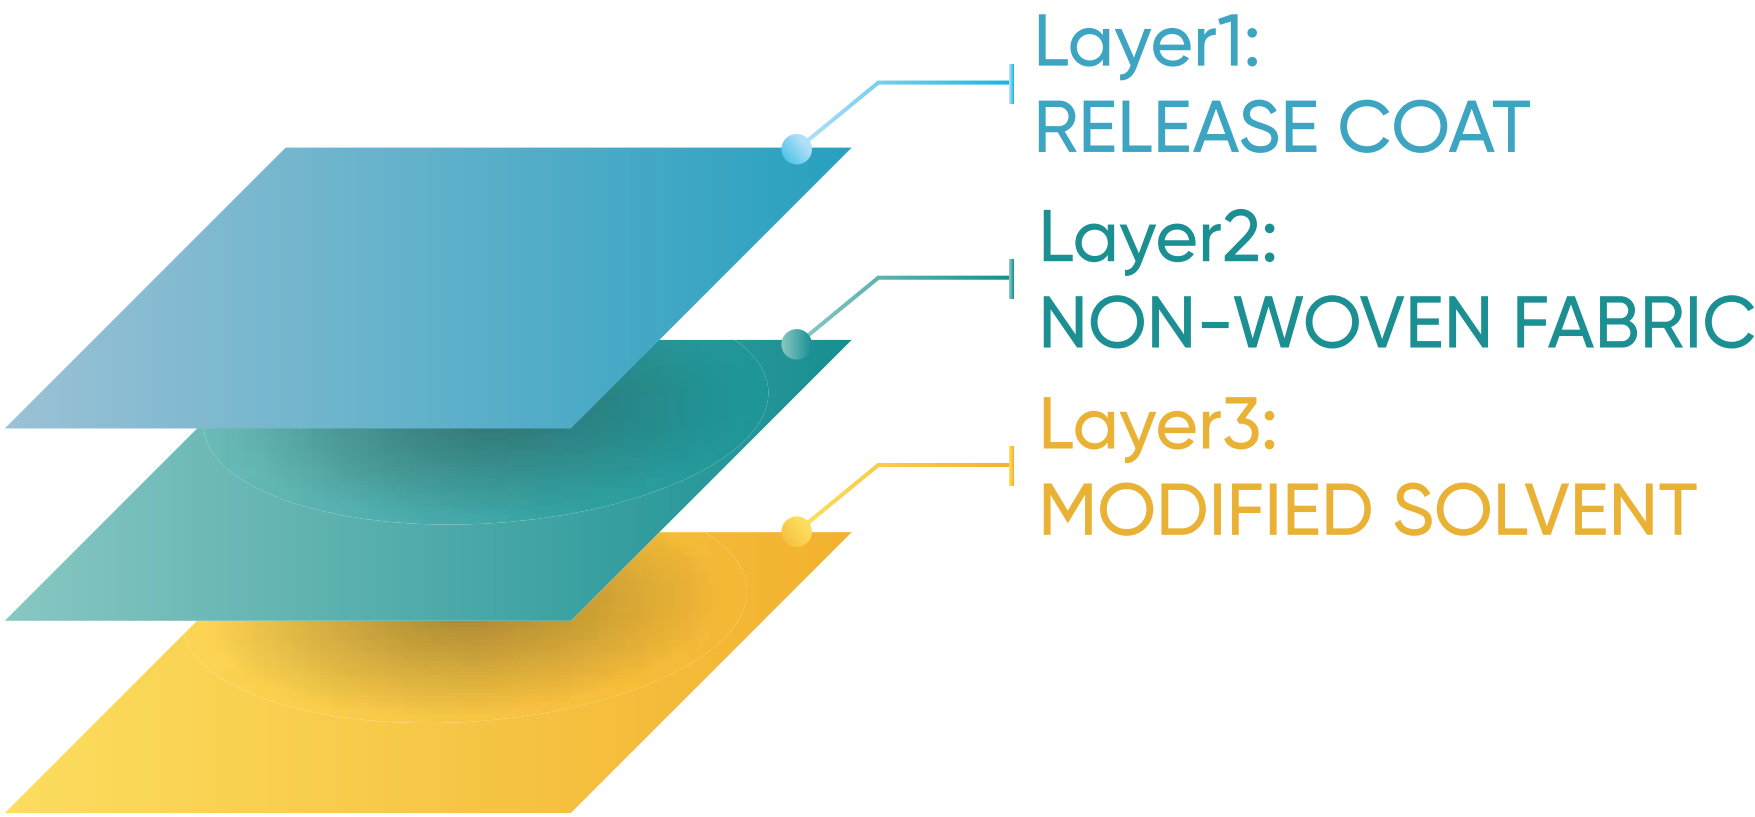

## Performance

Product Code	Backing	Total Thickness	Tack	Holding Power	Peel	Tensile
AVT160	Non-Woven Fabric	160μ	< 12 cm	> 1000 mins	> 400 g/in	> 4 kg/in

## Feature

- Special Porous Backing Allowing Excellent Permeability of High Air / Gases
- Pressure Sensitive Adhesive Holds Strong to a Wide Variety of Surfaces

## Variants

- Colors
  - White
- Slit Material
  - Width: 12mm to 300mm
  - Length: 33mtr to 66mtrs

## Application


- PUF Panel Manufacturing
- Insulated Doors / Cabinet
- Coolers / Refrigerator Manufacturing



# ALUMINIUM BITUMEN TAPE

Aluminium Flashband Bitumen Tape is the ultimate solution for waterproofing and vapour barrier requirements. It offers excellent sealing properties, ensuring long-lasting protection against moisture and leaks.

This tape is ideal for application on surfaces such as concrete, brick, or shingle roofing. It provides a strong, durable bond that withstands various weather conditions, making it perfect for outdoor use.

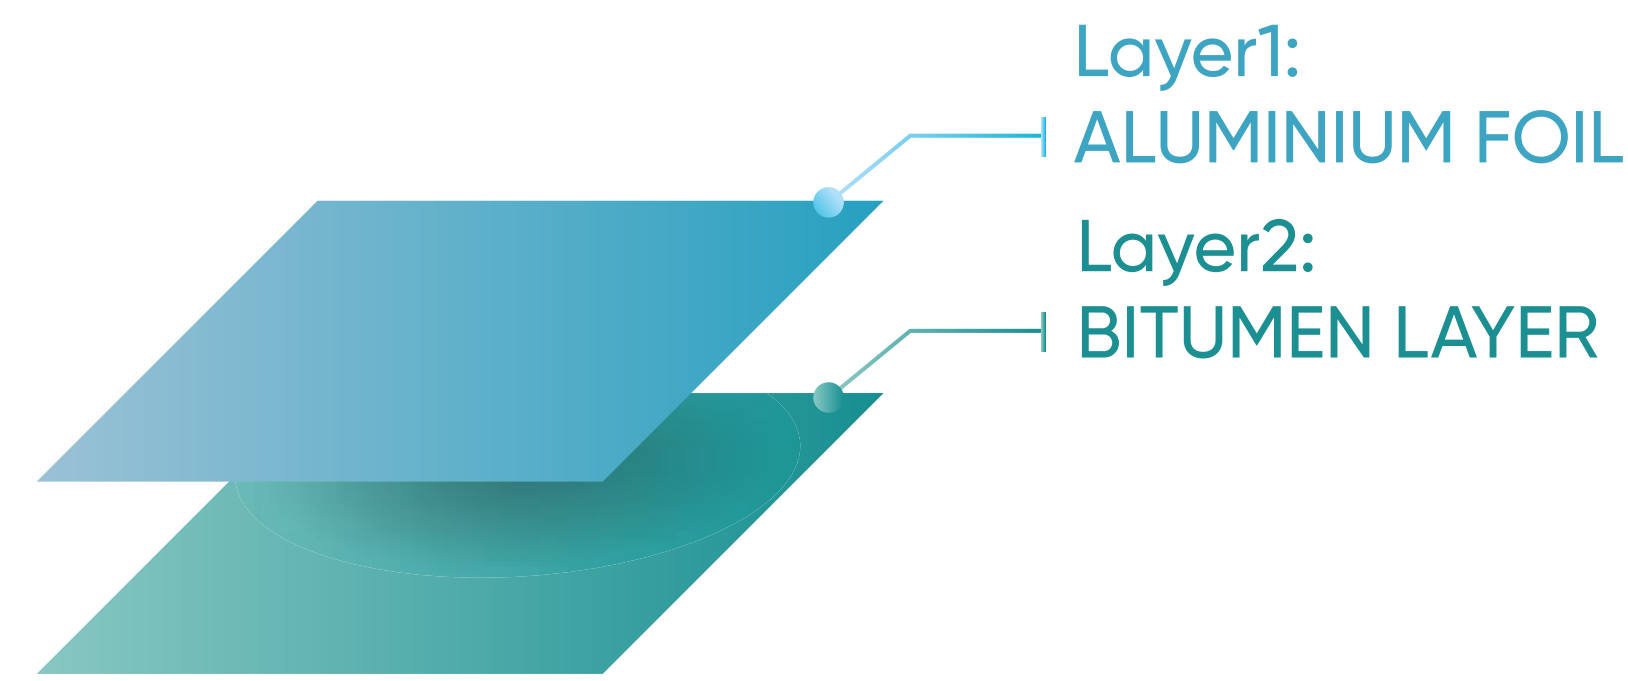

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Tensile
ALUFLASH	Bitumen	1.2 mm	> 6000 mins	> 2000 g/in	> 3.4 kg/cm

## Feature

- Glossy Aluminium Backing- To Reflect UV-Radiation and Provide Low Permeance
- High Resistance to Breaking Loads
- Excellent Heat Resistance
- Self Sealing
- Cold Application - No Flame, Heat, Primer Required
- Excellent Resistance to Acids, Mineral Salts & Corrosive Chemicals

## Variants

- Colors
  - Black
- Slit Material
  - Width: 36mm to 320mm
  - Length: 5mtr to 15mtrs
- Jumbo Rolls
  - Width: Upto 320mm
  - Length: Upto 15mtrs

## Application

- Shingle Roofing & Terraces
- Terrace, Bathroom & Kitchen Underlayment
- Renovation Work






# ABHEDYA BITUMEN TAPE

Abhedya Bitumen Tape is the ultimate solution for waterproofing and vapour barrier requirements. It offers strong protection against moisture, ensuring durability and long-term performance in various environments.

This tape is ideal for application on concrete, brick, or shingle roofing. It forms a reliable seal, providing excellent resistance to harsh weather conditions and enhancing the longevity of roofing structures.

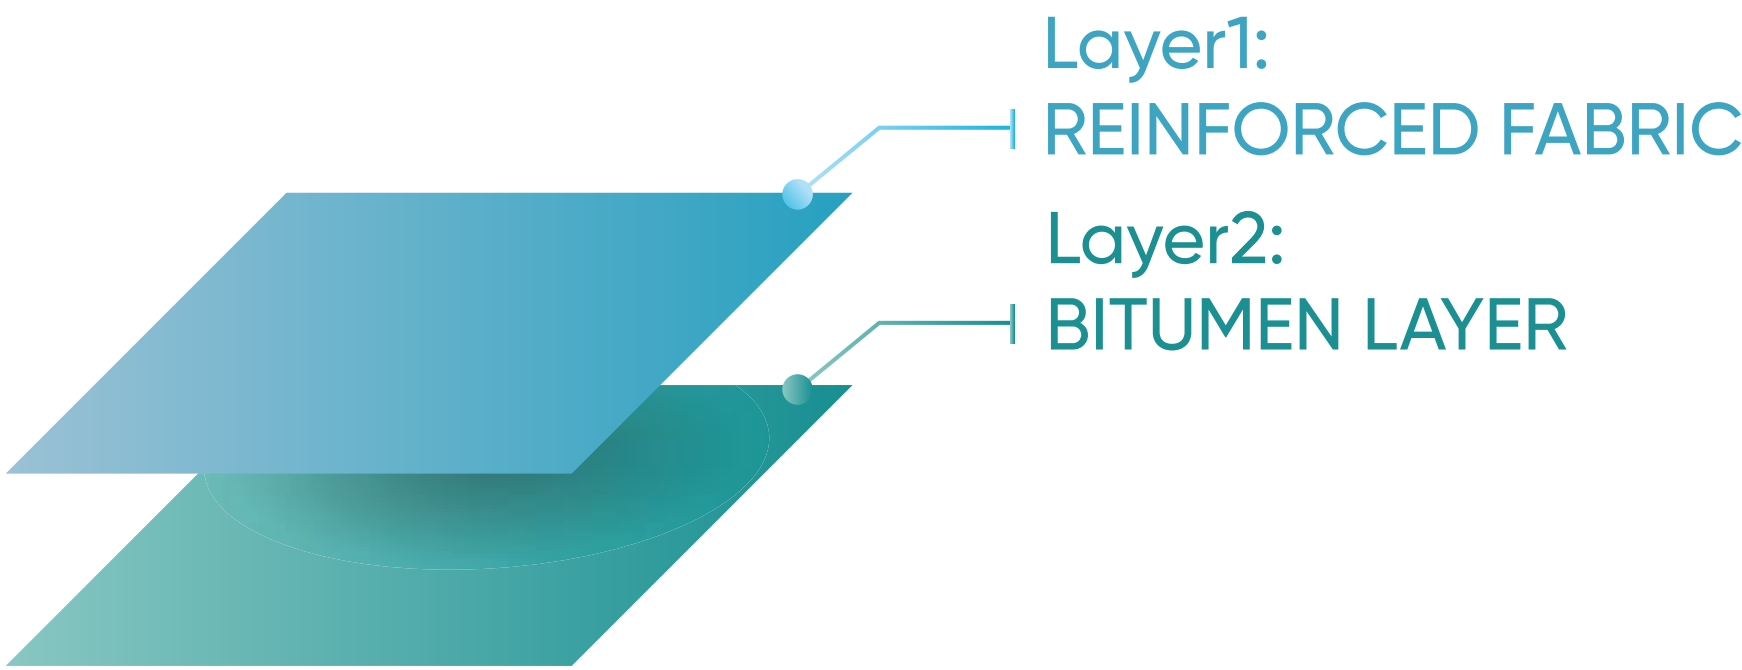

## Performance

Product Code	Backing	Total Thickness	Holding Power	Peel	Tensile
ABHEDYA	Bitumen	1.2 mm	> 6000 mins	> 2000 g/in	> 3.4 kg/cm

## Feature

- Self Sealing
- Cold Application – No Flame, Heat, Primer Required
- Excellent Resistance to Acids, Mineral Salts & Corrosive Chemicals
- High Resistance to Breaking Loads
- Excellent Heat Resistance

## Variants

- Colors
  - Black
- Slit Material
  - Width: 36mm to 300mm
  - Length: 5mtr to 15mtrs
- Jumbo Rolls
  - Width: Upto 320mm
  - Length: Upto 15mtrs

## Application


- Shingle Roofing & Terraces
- Terrace, Bathroom & Kitchen Underlayment
- Renovation Work



# PIPE WRAPPING TAPE

Pipe Wrapping Tapes are made from high-performance PE film combined with a modified acrylic adhesive. This composition ensures strong adhesion and durability for various industrial applications.

These tapes are weatherproof, offer excellent conformability, and are ideal for wrapping different kinds of pipes. They are suitable for both above-ground and underground use, providing reliable protection against environmental factors.

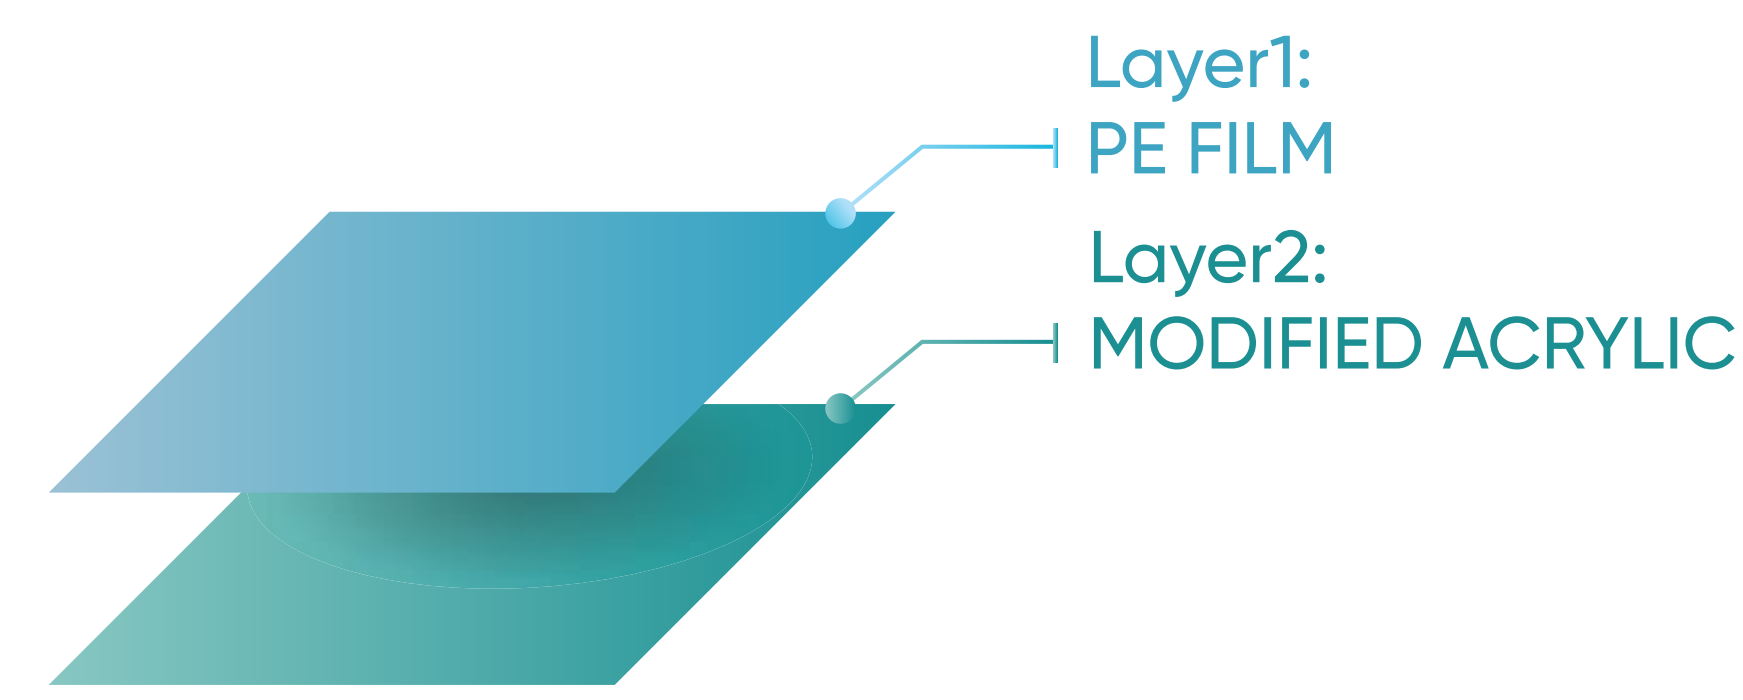

## Performance

Product Code	Backing	Total Thickness	Peel	Tensile	Elongation	Shelf Life
PWT	Performance PE Film	150μ	> 500 g/in	> 5.5 kg/in	> 500%	10 Years

## Feature

- Weatherproof & Corrosion Resistance
- UV Resistant
- REACH / RoHS Compliant
- Superb Flexibility
- Strong Adhesion & Holding Power
- Excellent Electrical & Insulation Properties

## Variants

- Colors
  - Black
  - White
  - Multiple Colors
- Slit Material
  - Width: 24mm to 100mm
  - Length: 25mtr to 1000mtrs

## Application

- To Protect Iron & Steel Pipe from Corrosion
- To Protect Electrical Conduit & Fittings From Corrosion






# POLYCOATED RELEASE LINERS

We offer poly-coated release liner solutions tailored to your specific applications. Our seamless release liners are available in widths of up to 1300 mm, ensuring efficiency and consistency in various industrial uses.

The silicone formulation is selected based on the required properties for your applications. We develop customized solutions to enhance your production processes and meet your end-use requirements.

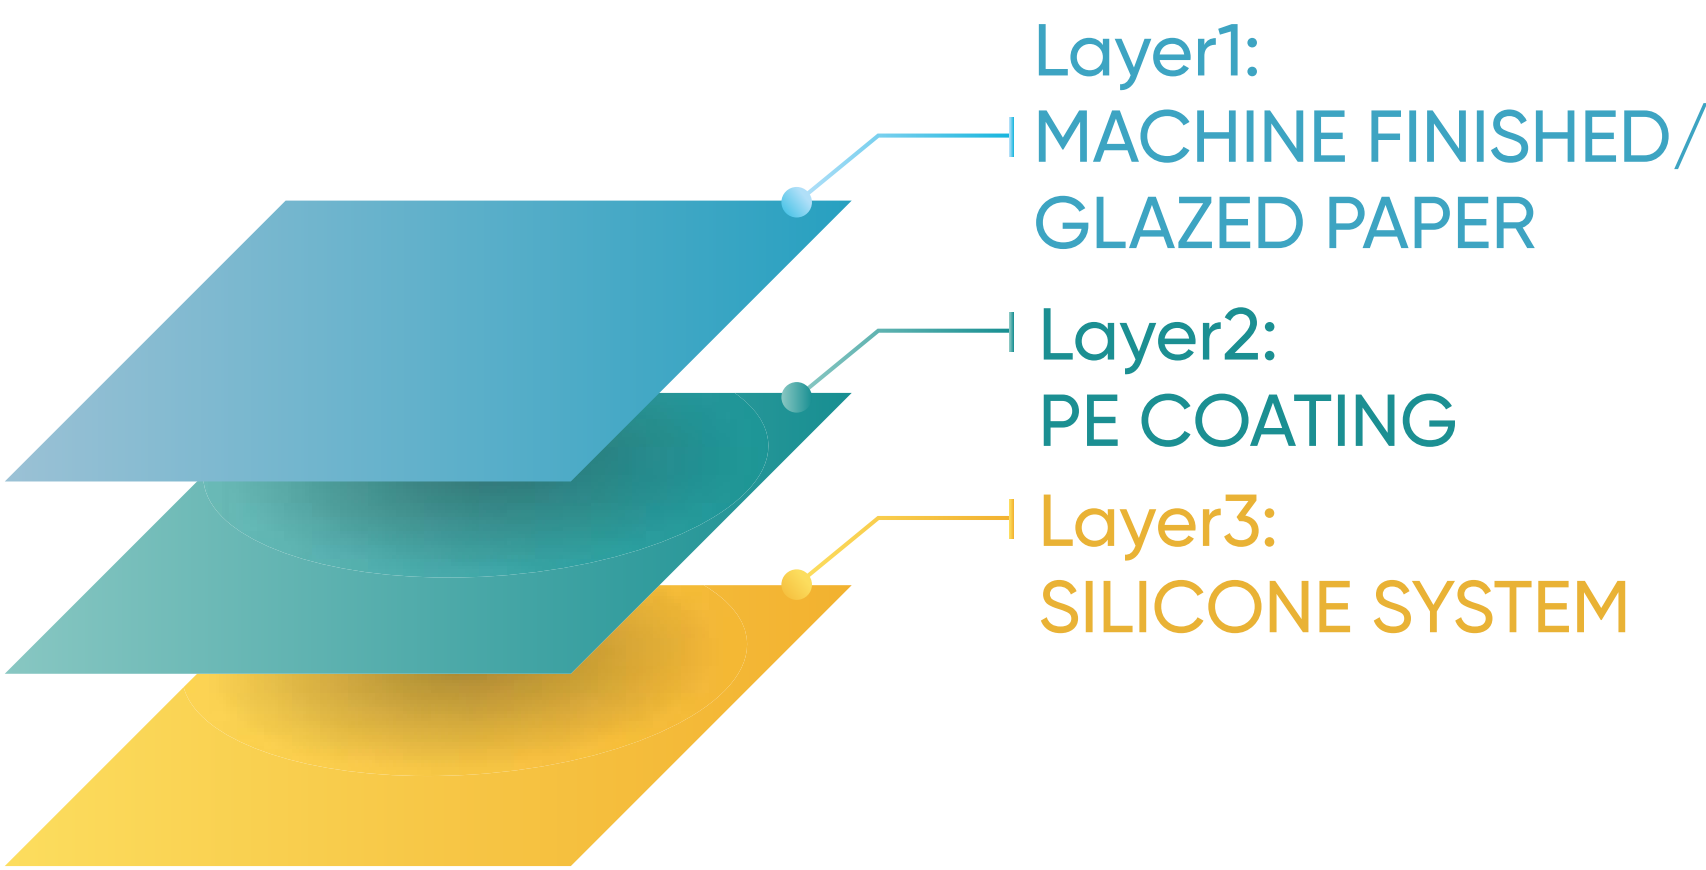

## Release Coating

- Premium, Easy and Modified Release
- Single Side and Both Sides Coating Options

## Feature

- Good Lay Flat Performance Under Critical Climatic Conditions
- Comprehensive In-House Printing Upto 6 Colors
- High Strength
- Consistent Release Value
- Dimensional Stability
- Surface Smoothness
- Strong Moisture Barrier Extrusion Layer

## Specifications

- Basic Weight  
45 to 150 GSM
- Width  
1300mm/ Slit Coils
- Colors  
Custom (Backing Color)
- Polymer  
Low Density Polyethylene

## Application

- Graphic Art
- Labels
- Tapes
- Envelopes





# GREEN WRAP

GreenWrap is an excellent alternative to plastic bubble wrap, providing cushioning and protection for fragile items during transit, ensuring safety.

**Available Sizes:**

- 380 mm x 100 meters (Expandable up to 70%)
- 500 mm x 250 meters (Expandable up to 70%)

**Thickness:**

80 GSM

**Colors:**

- Brown
- White



# GREEN FILL

GreenFill is used to fill empty spaces in shipping boxes, preventing items from shifting, breaking, or getting damaged during transit.

**Available Sizes:**

- 380 mm (Perforated Side) x 230 mm
- Standard Length: 350 meters

**Thickness:**

70 GSM

**Colors:**

- Brown



# STRETCH FILM

Stretch Film, made from LDPE, protects and secures furniture, boxes, and pallets, ensuring safety and stability during storage and transportation.

**Thickness:**

9µm - 70µm

**Widths:**


50mm to 2000 mm

**Colors:**

- Transparent
- Custom Colors

**Grades:**

- Manual
- Machine





# MINI TAPE DISPENSER

A mini tape desktop dispenser is a small yet functional accessory for offices, schools, and homes. It provides a stable base for one-handed tape dispensing, ensuring convenience and precision. Designed for standard tape rolls, it helps in effortless cutting and application. Its compact size makes it perfect for desks without taking up much space.

## Features:

- Easy to Use
- Cost Effective

## Applications:

- For General Sealing  
At Home & Offices

## Colors:

- Yellow, Red, Green,  
Blue, White



# HANDY TAPE DISPENSER

A handy tape dispenser is a portable and lightweight tool designed for quick and easy tape application. It features an ergonomic grip for comfortable use and a sharp blade for smooth cutting. Ideal for packaging, sealing, and office tasks, it ensures efficiency and reduces tape wastage. Its compact design makes it easy to carry and store.

## Features:



- Easy to Use
- Sturdy Design

## Applications:

- For Box Sealing at  
Offices & Industries

## Colors:

- Yellow, Red, Green,  
Blue, White

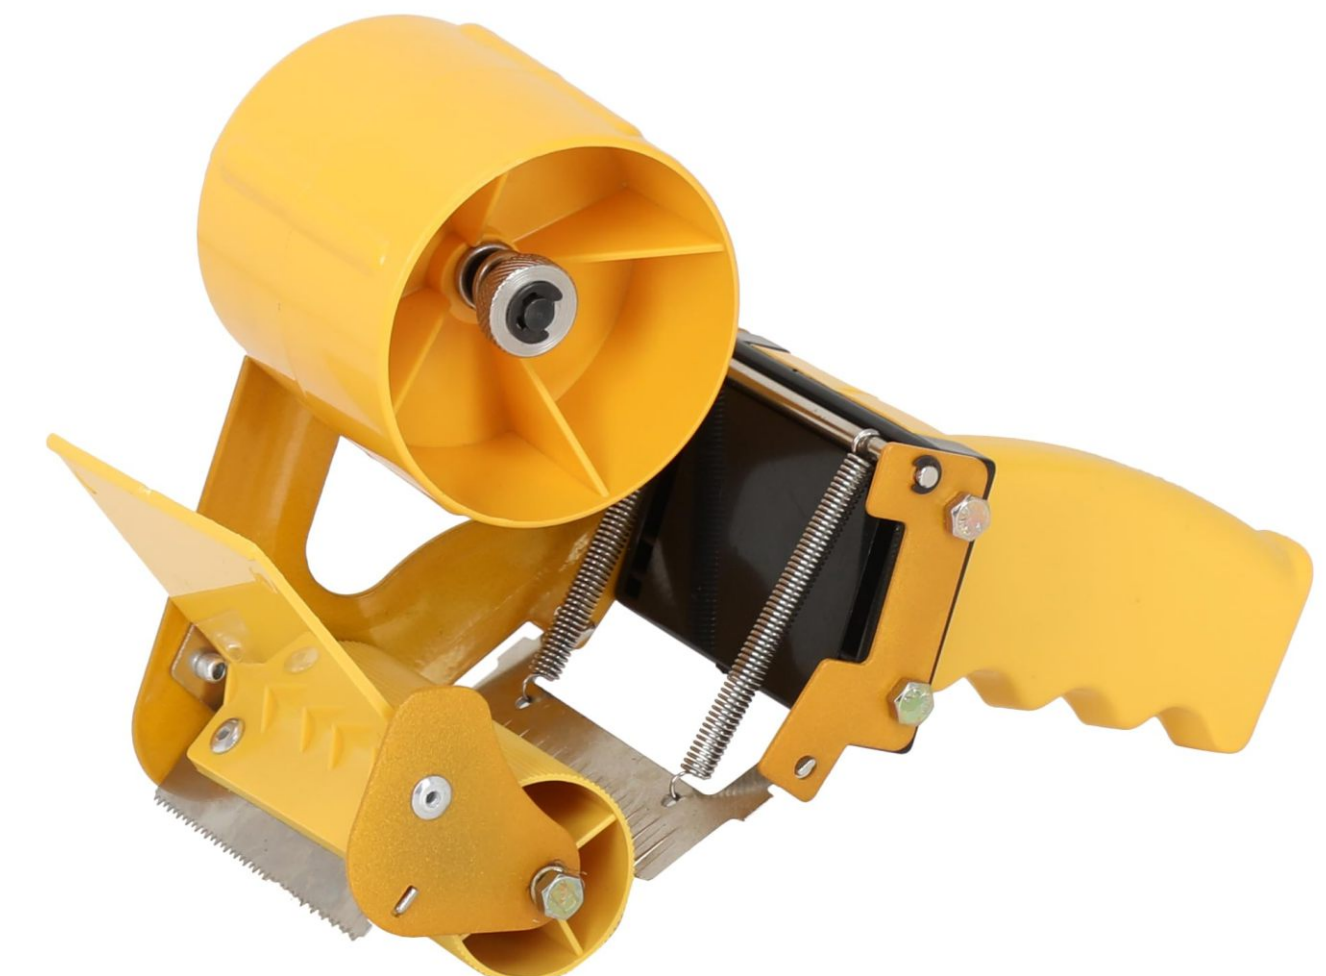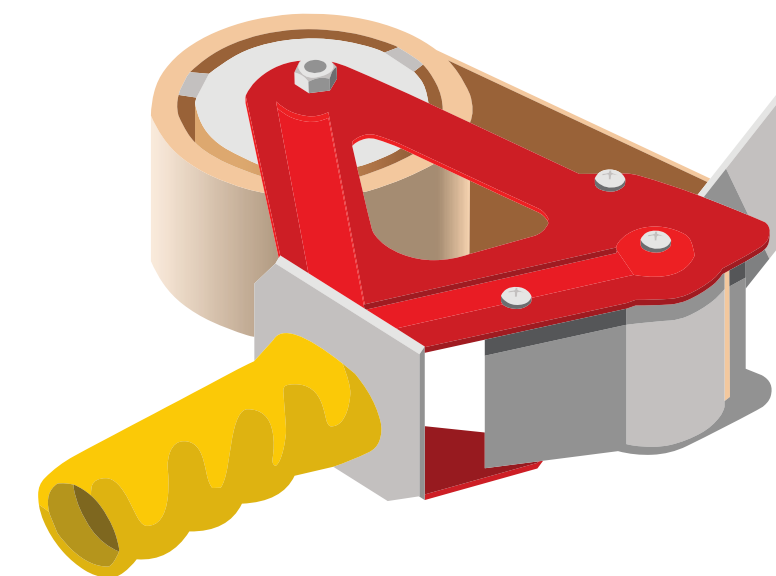



# GREEN WRAP DISPENSER


A mini tape desktop dispenser is a small yet functional accessory for offices, schools, and homes. It provides a stable base for one-handed tape dispensing, ensuring convenience and precision. Designed for standard tape rolls, it helps in effortless cutting and application. Its compact size makes it perfect for desks without taking up much space.

## Features:

- Compatible with Upto 500mm Rolls
- Suitable for All Core Id's
- Adjustable Tension Mechanism for a Smoother Usage

## Applications:

- For Dispensing and Stretching Of Honeycomb Paper

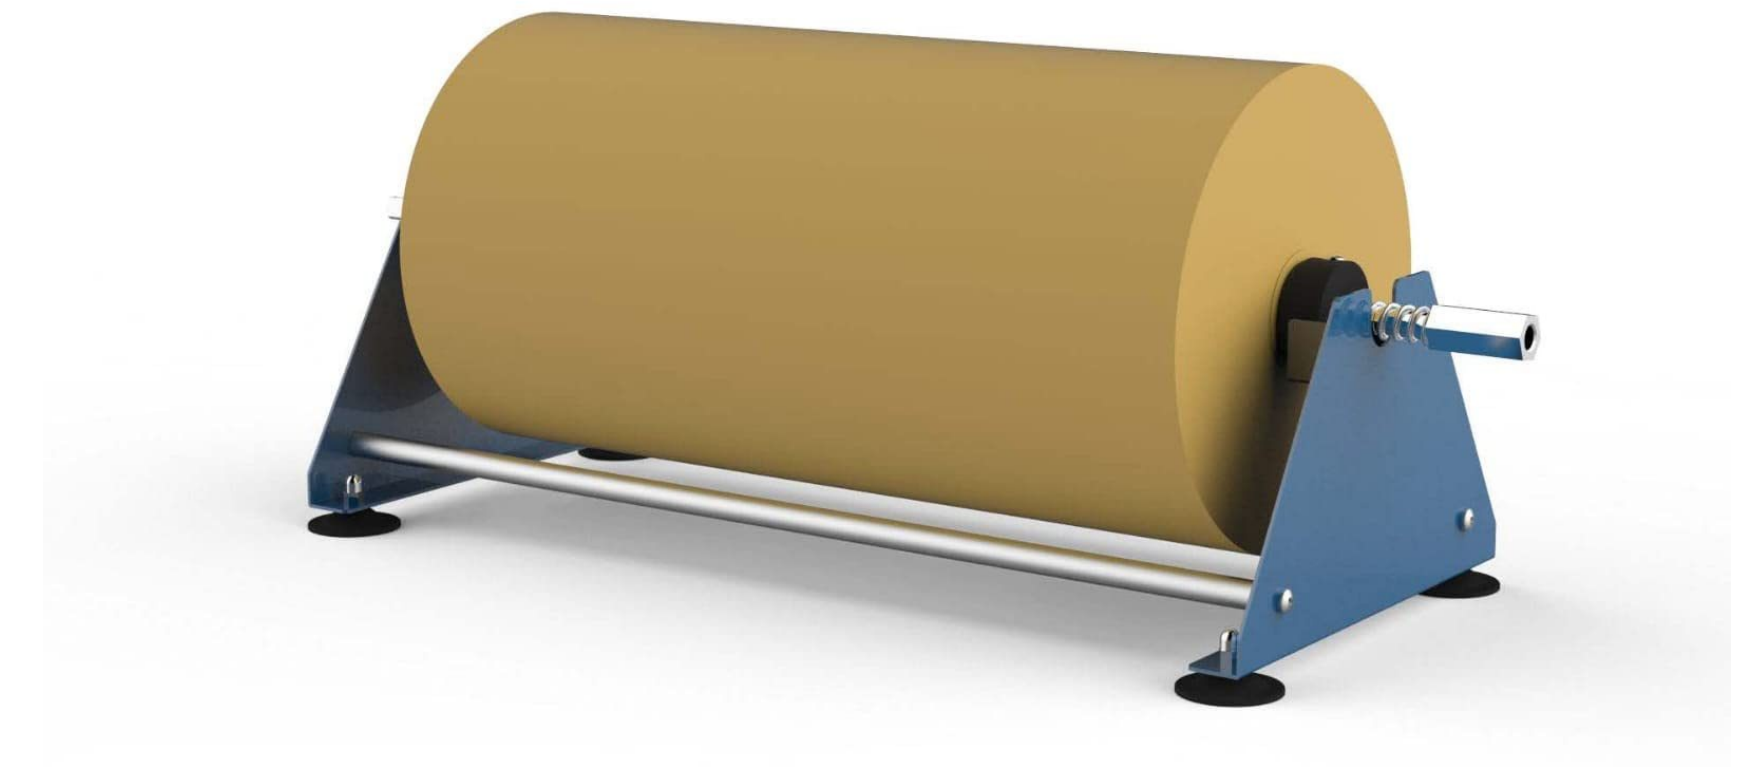

# GREEN FILL DISPENSER

A mini tape desktop dispenser is a small yet functional accessory for offices, schools, and homes. It provides a stable base for one-handed tape dispensing, ensuring convenience and precision. Designed for standard tape rolls, it helps in effortless cutting and application. Its compact size makes it perfect for desks without taking up much space.

## Features:

- Adjustable Knob at the Bottom to Fix it on any Tabletop
- Easy to Assemble and Carry
- A Simple to Pull & Use Dispenser

## Applications:

- For Easy & Effortless Dispensing Of The GreenFill Paper





# MANUAL TABLE TOP

- Compact Size & Easy Mobility
- Cost Effective
- Compatible Tape Width: 24 mm to 75 mm
- Dimesions ( L x W x H ) : 33 cm x 10 cm x 13 cm
- Weight : 0.58 Kgs



# SEMI AUTOMATIC

- Hand Lever for Smooth & Quick Dispensing
- Increased Efficiency & Productivity
- Compatible Tape Width : 40 mm to 75 mm
- Dimesions ( L x W x H ) : 45 cm x 27 cm x 24 cm
- Weight : 9.50 Kgs



# FULLY AUTOMATIC

- Automatic Buttons for Quickest Dispensing
- Provides Best Efficiency & Productivity
- Compatible Tape Width : 40 mm to 75 mm
- Dimesions ( L x W x H ) : 50 cm x 33 cm x 30 cm
- Weight : 13.0 Kgs



Contact Us:



[www.ajexim.info](http://www.ajexim.info)

+91 79843 40141

[inquiry.ajexim@gmail.com](mailto:inquiry.ajexim@gmail.com)