





YAMAHA CATALOGUE

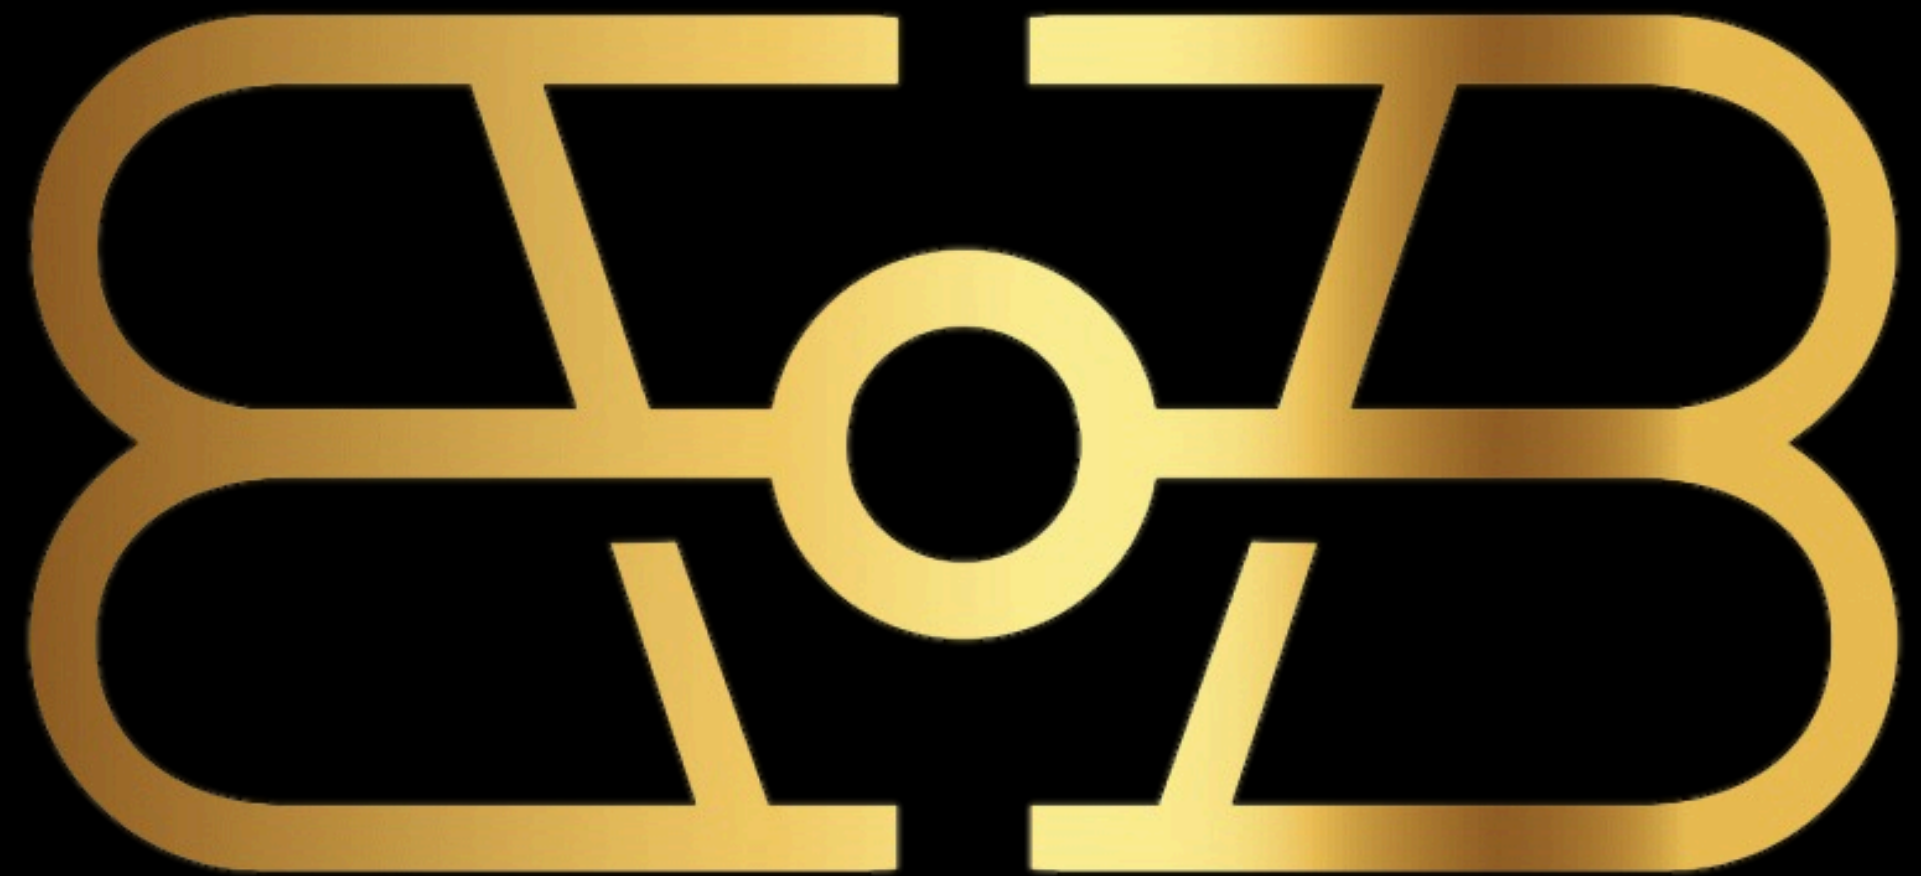

PT. BONEN HOKY SEJATI BERSAMA

Office : Kawasan Industri Kencana Alam Kav 23D, Sukanagara, Cikupa, Banten, Indonesia – 15710

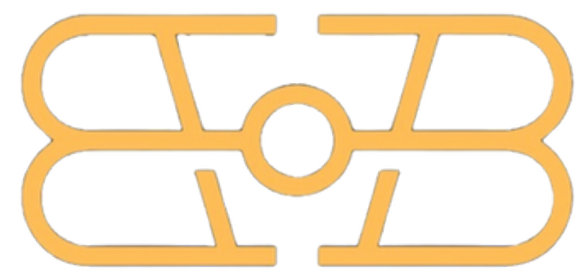

PT. BONEN HOKY SEJATI BERSAMA

GEAR¹²⁵
—MATIC MULTIGUNA—

GEAR 125 STANDARD VERSION



Dull blue



Black



Cyan



Red




OLIVE

**BLUE
CORE**



125 CC



ELECTRIC
POWER SOCKET



HEAD LIGHT



HAZARD LAMP



FUEL TANK



SMART MOTOR
GENERATOR




TUBELESS




SIDE
STAND SWITCH




MY YAMAHA



SMART LOCK



FORGED & DIASIL

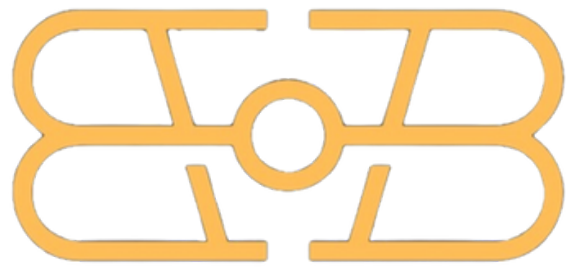

PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-GEAR 125



Machine

Machine type Air cooled 4-stroke, SOHC
Cylinder arrangement Single Cylinder
Diameter X Step 52,4 x 57,9 mm
Compression comparison 9,5 : 1
Cylinder volume 124.96 cc
Maximum power 7,0 kW / 8000 rpm
Maximum torque 9,5 Nm/ 5500 rpm
Starter system Electric & Kick Starter
Lubrication system Wet Sump
Engine oil capacity Total = 0,84 L ; Periodic = 0,80 L
Fuel System Fuel Injection
Clutch Type Single dry clutch
Transmission Type V-Belt Automatic

Dimension

W x L x H 1870mm X 685mm X 1060mm
Wheelbase 1260 mm
Seat Height 750 mm
Fill Weight 95 Kg
Gasoline Tank Capacity 4.2 L
Lowest Distance To The Ground 135 mm

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Swing Unit
Front Tire 80/80-14M/C (43P)
Rear Tire 100/70-14M/C (51P)
Front Brake Disc Brakes
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition System TCI
Battery YTZ4V, GTZ4V, NTZ4V
Spark Plug Type NGK/CR6HSA

GEAR¹²⁵
—MATIC MULTIGUNA—
GEAR 125 S VERSION



MATTE RED



MATTE BLUE



125 CC



HEAD LIGHT



SIDE
STAND SWITCH




SMART MOTOR
GENERATOR



HAZARD LAMP




TUBELESS




FORGED & DIASIL



FUEL TANK



SMART LOCK




ELECTRIC
POWER SOCKET



ANSWER BACK



MY YAMAHA

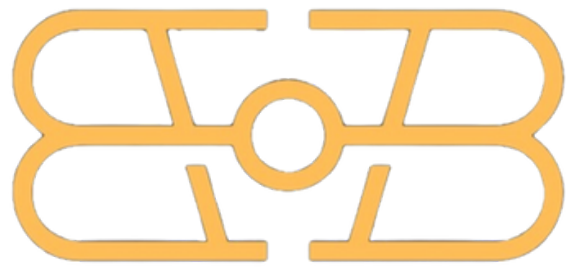

PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-GEAR 125 S VERSION



Machine

Machine type 4-stroke, SOHC
Cylinder arrangement Single Cylinder
Diameter X Step 52,4 x 57,9 mm
Compression comparison 9,5 : 1
Cylinder volume 124.96 cc
Maximum power 7,0 kW / 8000 rpm
Maximum torque 9,5 Nm/ 5500 rpm
Starter system Electric & Kick Starter
Lubrication system Wet Sump
Engine oil capacity Total = 0,84 L ; Periodic = 0,80 L
Fuel System Fuel Injection
Clutch Type Single dry clutch
Transmission Type Full Automatic

Dimension


W X L X H 1870mm X 685mm X 1060mm
Wheelbase 1260 mm
Seat Height 750 mm
Fill Weight 96 Kg
Gasoline Tank Capacity 4.2 L
Lowest Distance To The Ground 135 mm

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Swing Unit
Front Tire 80/80-14M/C (43P)
Rear Tire 100/70-14M/C (51P)
Front Brake Disc Brakes
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition System TCI
Battery YTZ6V NGK/CR6HSA
Spark Plug Type

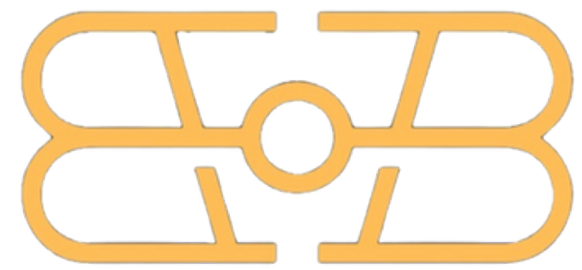

PT. BONEN HOKY SEJATI BERSAMA

MIO 125 ME TANPA KOMPROMI STANDARD VERSION



METALLIC CYAN



METALLIC YELLOW




METALLIC RED



METALLIC BLACK



FUEL TANK



MULTIFUNCTION
KEY



SIDE
STAND SWITCH




ECO
INDICATOR



MY YAMAHA




SMART LOCK



FORGED & DIASIL



125 CC

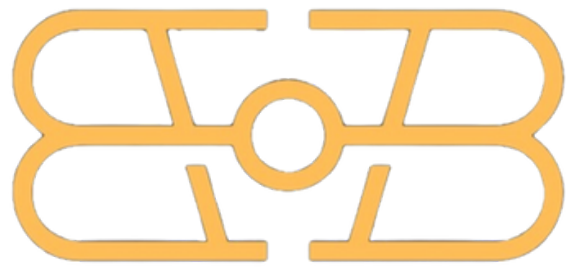

PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-MIO M3 CW



Machine

Machine type Air cooled 4-stroke, SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 9,5 : 1
Cylinder volume 125 cc
Maximum power 7 kW / 8000 rpm
Maximum torque 9.6 Nm / 5500 rpm
Starter system Electric & kick starter
Lubrication system Wet sump
Engine oil capacity Total = 0.84 L ; Periodic = 0.80 L
Fuel System FI (Fuel Injection)
Clutch Type Dry, Centrifugal Automatic
Transmission Type V-Belt Automatic

Dimension


L X W X H 1870mm X 685mm X 1035mm
Wheelbase 1260 mm
Lowest distance to ground 135 mm
Seat height 750 mm
Filling weight 92 kg
Gas tank capacity 4.2 L

Frame

Frame type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 70/90 - 14 M/C 34P
Rear Tires 80/90 - 14 M/C 40P
Front Brake Hydraulic Single Disc Brake
Rear brake Drum Brake

Electricity

Ignition system TCI
Battery YTZ4V/GTZ4V
Spark Plug Type NGK/CR6HSA

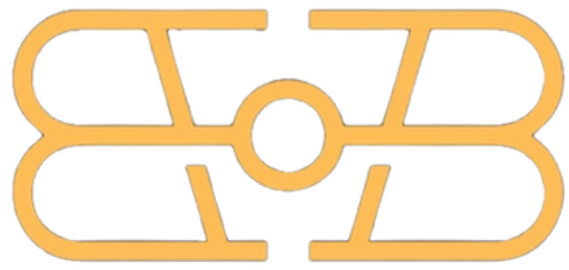

PT. BONEN HOKY SEJATI BERSAMA

ALL NEW
NEROX 155 VVA
STANDARD VERSION



Silver Cyan



Metallic Red



Black Grey



Dull Blue Orange



HEAD LIGHT



DIGITAL
SPEEDOMETER



LIQUID
COOLING


VVA
VARIABLE
VALVE ACTUATION



ELECTRIC
POWER SOCKET



TAIL LIGHT



TUBELESS



FORGED & DIASIL



155 CC



SMART MOTOR
GENERATOR



HAZARD LAMP



SIDE
STAND SWITCH



MY YAMAHA




SMART LOCK



FUEL TANK



FRONT
DISC BRAKE

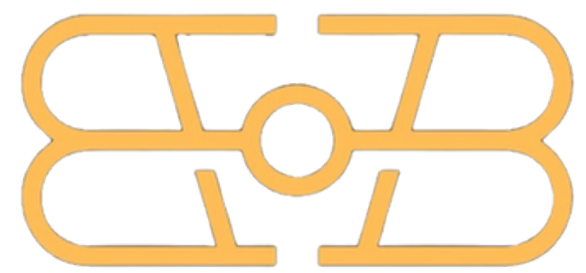

PT. BONEN HOKY SEJATI BERSAMA

ALL NEW
AEROX 155 VVA
STANDARD VERSION




CYBERCITY BLUE

AEROX 155 CYBERCITY COLOR



VVA
VARIABLE
VALVE ACTUATION



ELECTRIC
POWER SOCKET



HEAD LIGHT



TAIL LIGHT



DIGITAL
SPEEDOMETER



LIQUID
COOLING



155 CC



SMART LOCK



SMART MOTOR
GENERATOR




FUEL TANK



HAZARD LAMP



FRONT
DISC BRAKE



TUBELESS



SIDE
STAND SWITCH



FORGED & DIASIL



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-AEROX STANDARD



Machine

Machine Type Liquid cooled 4-stroke, SOHC
Number/Position of Cylinder Single Cylinder
Machine Capacity 155cc
Diameter x Step 58,0 mm x 58.7 mm
Compression Comparison 11.6 : 1
Maximum Power 11.3 kW / 8000 rpm
Maximum Torque 13.9Nm/6500rpm
Sistem Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total – 1.00 L ; Periodic 0.90 L
Fuel System FI (Fuel Injection)
Clutch Type Dry, Centrifugal Automatic
Transmission Type V-belt Automatic

Dimension


L X W X H 1980mm X 700mm X 1150mm
Wheelbase 1350 mm
Lowest distance to ground 143 mm
Seat height 790 mm
Filling weight 122 kg
Gas tank capacity 5.5 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/80-14M/C 53P
Rear Tires 140/70-14M/C 62P
Front Brake Disc
Rear brake Drum

Electricity

Ignition system TCI
Battery NTZ6V
Spark Plug Type NGK/CPR8EA-9

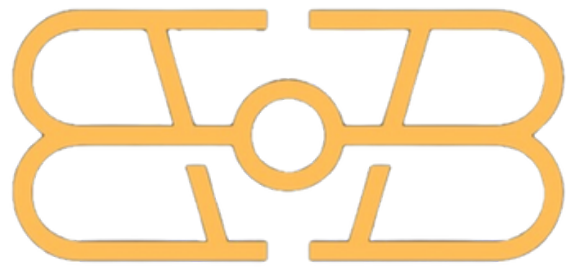

PT. BONEN HOKY SEJATI BERSAMA

ALL NEW
NEFOX 155 VVA
CONNECTED / ABS



BLACK




SILVER



SMART KEY



Y-CONNECT



155 CC



SMART MOTOR GENERATOR



SUB-TANK SUSPENSION



HEAD LIGHT



TAIL LIGHT



HAZARD LAMP



ANTI-LOCK BRAKING SYSTEM



DIGITAL SPEEDOMETER



TUBELESS



SIDE STAND SWITCH



FUEL TANK



LIQUID COOLING



FORGED & DIASIL



MY YAMAHA



SMART LOCK



FRONT DISC BRAKE



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-AEROX ABS



Machine

Machine Type Liquid cooled 4-stroke, SOHC
Number/Position of Cylinder Single Cylinder
Machine Capacity 155cc
Diameter x Step 58,0 mm x 58.7 mm
Compression Comparison 11.6 : 1
Maximum Power 11.3 kW / 8000 rpm
Maximum Torque 13.9Nm/6500rpm
System Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total – 1.00 L ; Periodic 0.90 L
Fuel System FI (Fuel Injection)
Clutch Type Dry, Centrifugal Automatic
Transmission Type V-belt Automatic

Dimension


L X W X H 1980mm X 700mm X 1150mm
Wheelbase 1350 mm
Lowest distance to ground 143 mm
Seat height 790 mm
Filling weight 125 kg
Gas tank capacity 5.5 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/80-14M/C 53P
Rear Tires 140/70-14M/C 62P
Front Brake Disc
Rear brake Drum

Electricity

Ignition system TCI
Battery NTZ7V
Spark Plug Type NGK/CPR8EA-9

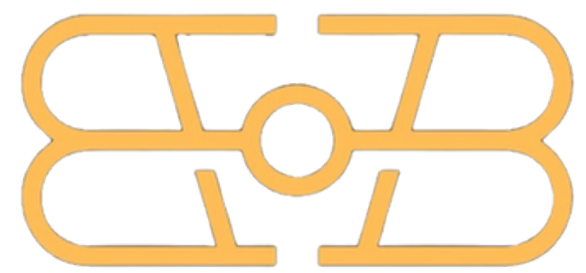

PT. BONEN HOKY SEJATI BERSAMA

ALL NEW
NMAX 155
— LIVE THE PRIDE —



STANDARD VERSION



BLACK



RED



GREEN



BLUE



MAXI RELAXED




DIGITAL
SPEEDOMETER



TAIL LIGHT



HEAD LIGHT



ELECTRIC
POWER SOCKET



SUB-TANK
SUSPENSION



FUEL TANK



SIDE
STAND SWITCH



LIQUID
COOLING



155 CC




SMART MOTOR
GENERATOR



FORGED & DIASIL



HAZARD LAMP



TUBELESS



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-NMAX STANDARD



Machine

Machine Type Liquid cooled 4-stroke, SOHC, VVA
Number/Position of Cylinder Single Cylinder
Machine Capacity 155cc
Diameter x Step 58,0 mm x 58.7 mm
Compression Comparison 11.6 : 1
Maximum Power 11.3 kW / 8000 rpm
Maximum Torque 13.9Nm / 6500rpm
Sistem Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total – 1.00 L ; Periodic 0.90 L
Fuel System FI (Fuel Injection)
Clutch Type Single Dry Clutch
Transmission Type Automatic

Dimension

L X W X H (1935 x 740 x 1160) mm
Wheelbase 1340 mm
Lowest distance to ground 124 mm
Seat height 765 mm
Filling weight 130 kg
Gas tank capacity 7.1 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 – 13 M/C 48P
Rear Tires 130/70 – 13 M/C 63P
Front Brake Hydraulic Single Disc Brake
Rear brake Hydraulic Single Disc Brake

Electricity

Ignition system TCI
Battery YTZ6V/YTZ7V
Spark Plug Type NGK/CPR8EA-9

ALL NEW
NMAX 155
 — LIVE THE PRIDE —
S VERSION



GREEN




RED



SILVER



BLACK





PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION – NMAX 155 S VERSION



Machine

Machine Type Liquid cooled 4-stroke, SOHC, VVA
Number/Position of Cylinder Single Cylinder
Machine Capacity 155cc
Diameter x Step 58,0 mm x 58.7 mm
Compression Comparison 11.6 : 1
Maximum Power 11.3 kW / 8000 rpm
Maximum Torque 13.9Nm/6500rpm
System Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total – 1.00 L ; Periodic 0.90 L
Fuel System FI (Fuel Injection)
Clutch Type Single Dry Clutch
Transmission Type Automatic

Dimension


L X W X H (1935 x 740 x 1160) mm
Wheelbase 1340 mm
Lowest distance to ground 124 mm
Seat height 765 mm
Filling weight 130 kg
Gas tank capacity 7.1 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 – 13 M/C 48P
Rear Tires 130/70 – 13 M/C 63P
Front Brake Hydraulic Single Disc Brake
Rear brake Hydraulic Single Disc Brake

Electricity

Ignition system TCI
Battery YTZ6V
Spark Plug Type NGK/CPR8EA-9

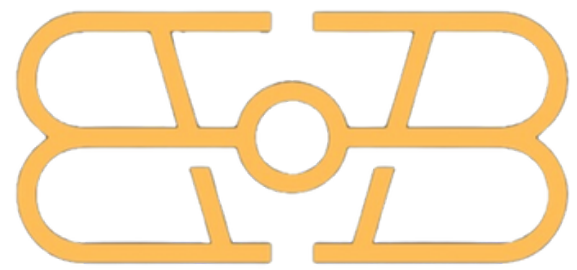

PT. BONEN HOKY SEJATI BERSAMA

ALL NEW
NMAX 155
CONNECTED / ABS
LIVE THE PRIDE



GREEN



BLACK



SILVER



HEAD & TAIL LIGHT



MAXI RELAXED



FORGED & DIASIL



ANTI-LOCK BRAKING SYSTEM



HAZARD LAMP



SIDE STAND SWITCH



TUBELESS



ELECTRIC POWER SOCKET



SUB-TANK SUSPENSION



ADJUSTABLE SUSPENSION



FUEL TANK



DIGITAL SPEEDOMETER



SMART KEY



Y-CONNECT



MY YAMAHA



155 CC



SMART MOTOR GENERATOR



TRACTION CONTROL SYSTEM



LIQUID COOLING



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-NMAX C/ABS



Machine

Machine Type Liquid cooled 4-stroke, SOHC
Number/Position of Cylinder Single Cylinder
Machine Capacity 155cc
Diameter x Step 58,0 mm x 58.7 mm
Compression Comparison 11.6 : 1
Maximum Power 11.3 kW / 8000 rpm
Maximum Torque 13.9Nm/6500rpm
System Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total – 1.00 L ; Periodic 0.90 L
Fuel System FI (Fuel Injection)
Clutch Type Single Dry Clutch
Transmission Type Automatic

Dimension


L X W X H (1935 x 740 x 1160) mm
Wheelbase 1340 mm
Lowest distance to ground 124 mm
Seat height 765 mm
Filling weight 132 kg
Gas tank capacity 7.1 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 – 13 M/C 48P
Rear Tires 130/70 – 13 M/C 63P
Front Brake Hydraulic Single Disc Brake
Rear brake Hydraulic Single Disc Brake

Electricity

Ignition system TCI
Battery YTZ6V
Spark Plug Type NGK/CPR8EA-9

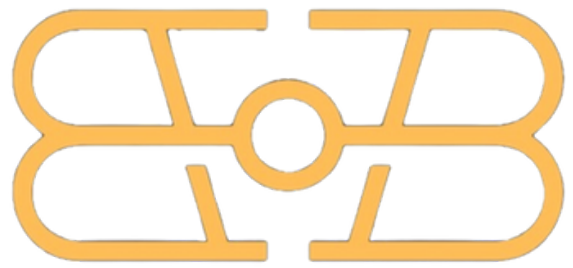

PT. BONEN HOKY SEJATI BERSAMA

NMAX "TURBO"



TURBO



Magma Black

Elixir Dark Silver

TURBO :

1. "TURBO" Tech Max Ultimate (Magma Black)
2. "TURBO" Tech Max (Magma Black)
3. "TURBO" (Magma Black & Elixir Dark Silver)

NEO :

1. NEO S Version (Black, Red Dull Blue, White)
2. NEO Version (Black, Red Dull Blue, White)

NEO



Black

Red

Dull Blue

White



HEAD & TAIL LIGHT



VARIABLE VALVE ACTUATION



MAXI RELAXED FORGED & DIASIL



ANTI-LOCK BRAKING SYSTEM



HAZARD LAMP



SIDE SWITCH



TUBELESS



ELECTRIC POWER SOCKET



SUB-TANK SUSPENSION



ADJUSTABLE SUSPENSION



7.1 l FUEL TANK



DIGITAL SPEEDOMETER



SMART KEY



Y-CONNECT



MY YAMAHA



155 CC



SMART MOTOR GENERATOR



TRACTION CONTROL SYSTEM



LIQUID COOLING



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-NMAX TURBO & NEO



Machine

Machine Type 155cc Blue Core, VVA, 4 Valve SOHC + YECVT
Machine Type Neo : 155cc Blue Core, VVA, 4 Valve SOHC
Number/Position of Cylinder : Single Cylinder
Machine Capacity : 155.09cc
Diameter x Step : 58 mm x 58.7 mm
Compression Comparasion : 11.6 :1
Maximum Power : 11.3 kW / 8000 rpm
Maximum Torque : 14.2 Nm / 6500 rpm
System Starter : Electric Starter
Lubrication System : Wet Sump
Engine Oil Capacity : 1 L (Turbo), 0.9 L (NEO)
Fuel System : FI (Fuel Injection)
Clutch Type : Single Dry Clutch
Transmission Type : Automatic

Dimension


L X W X H (1935 x 740 x 1200) mm
Wheelbase 1340 mm
Lowest distance to ground : 135mm
Seat height 770 mm
Filling weight 135 kg (Turbo Tech Max), 133 Kg (Turbo), 130 Kg (Neo)
Gas tank capacity 7.1 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 - 13 M/C 48P
Rear Tires 130/70 - 13 M/C 63P
Front Brake Hydraulic Single Disc Brake
Rear brake Hydraulic Single Disc Brake

Electricity

Ignition system TCI
Battery YTZ6V / YTZ7V
Spark Plug Type NGK/CPR8EA-9

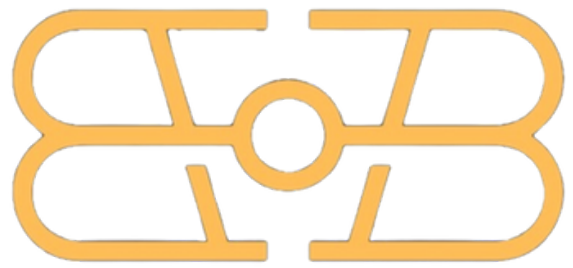

PT. BONEN HOKY SEJATI BERSAMA

XMAX Connected-



BLACK



PRESTIGE GREY



RED



FRONT & REAR
DISC BRAKE



Y-CONNECT



250 CC



ADJUSTABLE
WINDSHIELD



SMART KEY



TRACTION
CONTROL
SYSTEM




TUBELESS



FORGED & DIASIL



STAND
SIDE SWITCH



ELECTRIC
POWER SOCKET



MAXI RELAXED



ADJUSTABLE
HANDLE BAR



HAZARD LAMP



LIQUID
COOLING



HEAD & TAIL
LIGHT



ANTI-LOCK
BRAKING
SYSTEM



INFOTAINMENT
DISPLAY



BAGGAGE



FUEL TANK



DIGITAL
SPEEDOMETER



NAVIGATION
SYSTEM



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-XMAX 250 C



Machine

Machine Type Liquid Cooled 4-stroke, SOHC, 4 Valves
Number/Position of Cylinder Single Cylinder
Cylinder Fill 249.8 cc
Diameter x Step 70.0 mm x 64.9 mm
Compression Comparison 10.5 : 1
Maximum Power 16.8 Kw / 7000 rpm
Maximum Torque 24.3 Nm / 5500 rpm
System Starter Electric Starter Wet Sump Total
Lubrication System 1.7 L ; Periodic = 1.5 L
Engine Oil Capacity
Fuel System FI (Fuel Injection)
Clutch Type Dry, Centrifugal Automatic
Transmission Type V-belt Automatic

Dimension


L X W X H 2180mm X 795mm X 1460mm
Wheel Axis Distance 1540 mm
Lowest Distance To The Ground 135 mm
Seat Height 795 mm
Contents Weight 181 Kg
Gasoline Tank Capacity 13 L

Frame

Frame Type Backbone
Front Suspension Telescopic Fork
Rear Suspension Unit Swing
Front Tire 120/70-15M/C 56P
Rear Tire 140/70-14M/C 62P
Front Brake Disc Brake
Rear Brake Disc Brake

Electricity

Ignition System TCI
Battery GTZ8V NGK/ LMAR8A-9
Spark Plug Type

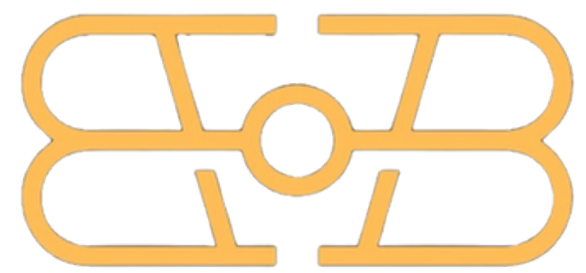

PT. BONEN HOKY SEJATI BERSAMA

LEXI
SMART IS THE NEW SEXY



METALLIC RED



METALLIC BLACK



MATTE GREY



155 CC



HEAD LIGHT



TUBELESS



TAIL LIGHT




HAZARD LAMP



MY YAMAHA



ELECTRIC
POWER SOCKET



FORGED & DIASIL



FUEL TANK



DIGITAL
SPEEDOMETER



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION – LEXI STANDARD



Machine

Machine Type SOHC
Number/Position of Cylinder Single Cylinder
Cylinder Fill 155.09 cc
Diameter x Step 58.0 mm x 58.7 mm
Compression Comparison 11.6 : 1
Maximum Power 11.3 Kw / 8000 rpm
Maximum Torque 14.2 Nm / 6500 rpm
System Starter Electric Starter Wet Sump Total
Lubrication System 1 L ; Periodic = 0.9 L
Engine Oil Capacity
Fuel System FI (Fuel Injection)
Clutch Type Single Dry Clutch
Transmission Type Automatic

Dimension


L X W X H 1970mm X 720mm X 1135mm
Wheel Axis Distance 1350 mm
Lowest Distance To The Ground 135 mm
Seat Height 770 mm
Contents Weight 116 Kg
Gasoline Tank Capacity 4.2 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 90/90-14M/C 46P
Rear Tire 100/90-14M/C 57P
Type Tire Tubeless
Front Brake Disc Brake
Rear Brake Drum Brake

Electricity

Ignition System TCI
Battery GTZ6V NGK/ CPR8EA-9
Spark Plug Type

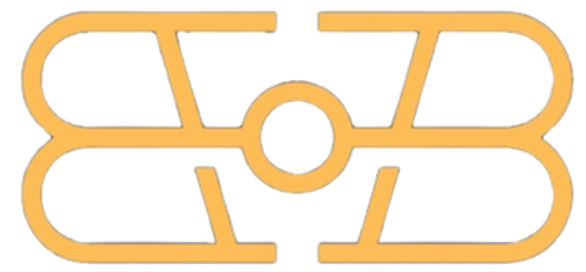

PT. BONEN HOKY SEJATI BERSAMA



CYAN YELLOW



SAND



BLACK RED




HEAD LIGHT



ECO
INDICATOR



ANSWER BACK




125 CC



MY YAMAHA



SIDE
STAND SWITCH



FORGED & DIASIL



HAZARD LAMP



SUB-TANK
SUSPENSION



FUEL TANK



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION



Machine

Machine type 4-Step, 2 Valve SOHC, wind cooled,
Bluecore
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 9,5 : 1
Cylinder volume 125 cc
Maximum power 7 kW / 8000 rpm
Maximum torque 9.6 Nm / 5500 rpm
Starter system Electric & kick starter
Lubrication system Wet sump
Engine oil capacity Total = 0.84 L ; Periodic = 0.80 L ;
Oil filter = 0.80 L
Fuel System FI (Fuel Injection)
Clutch Type Dry Centrifugal Clutch
Transmission Type Full Automatic

Dimension


L X W X H 1860mm X 740mm X 1070mm
Wheelbase 1260 mm
Lowest distance to ground 135 mm
Seat height 760 mm
Filling weight 98 kg
Gas tank capacity 4.2 L

Frame

Frame type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 80/80 - 14 M/C 43P
Rear Tires 100/70 - 14 M/C 51P
Front Brake Disc Brake
Rear brake Drum Brake

Electricity

Ignition system TCI
Battery YTZ4V/GTZ4V
Spark Plug Type NGK/CRGHSA

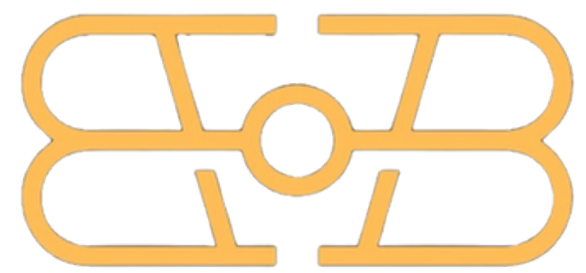

PT. BONEN HOKY SEJATI BERSAMA

FreeGo 125

STANDARD VERSION



RED




BLUE



YELLOW



BLACK



ELECTRIC
POWER SOCKET



TUBELESS



DIGITAL
SPEEDOMETER



125 CC



LED
HEAD LIGHT



FRONT
DISC BRAKE



25 l
BAGGAGE




HAZARD LAMP



SMART MOTOR
GENERATOR



MY YAMAHA



FORGED & DIASIL



4.2 L
FUEL TANK



SMART LOCK



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-FREEGO 125



Machine

Machine type Air Cooled 4-Stroke, SOHC
Cylinder arrangement Single Cylinder
Diameter X Step 52,4 x 57,9 mm
Compression comparison 9,5 : 1
Cylinder volume 125 cc
Maximum power 7,0 kW / 8000 rpm
Maximum torque 9,5 Nm/ 5500 rpm
Starter system Electric Starter Wet Sump Total =
Lubrication system 0,84 L ; Periodic = 0,80 L
Engine oil capacity
Fuel System Fuel Injection
Clutch Type Dry, Centrifugal Automatic
Transmission Type V-belt Automatic

Dimension


W X L X H 1905mm X 690mm X 1115mm
Wheelbase 1275 mm
Seat Height 780 mm
Fill Weight 101 Kg
Gasoline Tank Capacity 4.2 L
Lowest Distance To The Ground 135 mm

Frame

Frame Type Underbone
Front Suspension Telescopic Fork
Rear Suspension Swing Unit
Front Tire 100/90-12M/C (59J)
Rear Tire 110/90-12M/C (64L)
Front Brake Disc Brakes
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition System TCI
Battery YTZ4V, GTZ4V, NTZ4V
Spark Plug Type NGK/CR6HSA

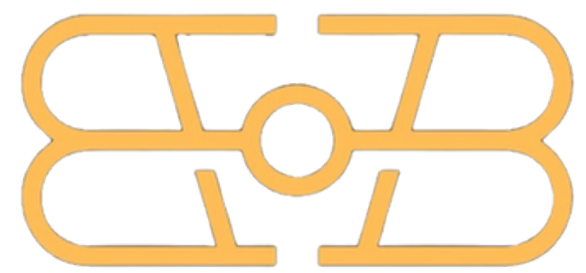

PT. BONEN HOKY SEJATI BERSAMA

FreeGo 125
Connected

CONNECTED



MATTE GREEN



PRESTIGE SILVER



Y-CONNECT



125 CC



HEAD LIGHT



FRONT
DISC BRAKE



BAGGAGE




HAZARD LAMP



SMART MOTOR
GENERATOR



TUBELESS



FORGED & DIASIL



FUEL TANK




SMART LOCK



MY YAMAHA



ELECTRIC
POWER SOCKET



SMART KEY



DIGITAL
SPEEDOMETER



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-FREEGO 125 CONNECTED



Machine

Machine type Air Cooled 4-Stroke, SOHC
Cylinder arrangement Single Cylinder
Diameter X Step 52,4 x 57,9 mm
Compression comparison 9,5 : 1
Cylinder volume 125 cc
Maximum power 7,0 kW / 8000 rpm
Maximum torque 9,5 Nm/ 5500 rpm
Starter system Electric Starter Wet Sump Total =
Lubrication system 0,84 L ; Periodic = 0,80 L
Engine oil capacity
Fuel System Fuel Injection
Clutch Type Dry, Centrifugal Automatic
Transmission Type V-belt Automatic

Dimension

W X L X H 1905mm X 690mm X 1115mm
Wheelbase 1275 mm
Seat Height 780 mm
Fill Weight 102 Kg
Gasoline Tank Capacity 4.2 L
Lowest Distance To The Ground 135 mm

Frame

Frame Type Underbone
Front Suspension Telescopic Fork
Rear Suspension Swing Unit
Front Tire 100/90-12M/C (59J)
Rear Tire 110/90-12M/C (64L)
Front Brake Disc Brakes
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition System TCI
Battery YTZ6V NGK/CR6HSA
Spark Plug Type

Fino 125

FINO GRANDE



ADVANCE KEY



SMART LOCK



HEAD LIGHT



SIDE
STAND SWITCH




BAGGAGE



FUEL TANK



ECO
INDICATOR




FORGED & DIASIL



125 CC



MY YAMAHA

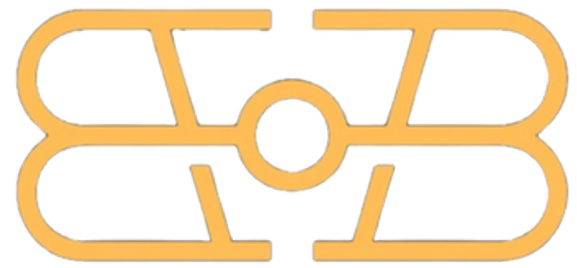

PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION – FINO GRANDE



Machine

Machine type 4-Stroke, Air cooled, SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 9.5 : 1
Cylinder volume 125 cc
Maximum power 7.0 kW (9.52 PS) / 8000 rpm
Maximum torque 9.6 Nm (0.98 kgf.m) / 5500 rpm
Starter system Electric & kick starter
Lubrication system Wet
Engine oil capacity Total = 0.84 L ; Periodic = 0.80 L
Fuel System FI (Fuel Injection)
Clutch Type Dry Centrifugal Clutch
Transmission Type V-Belt Automatic

Dimension


L X W X H 1870mm X 700mm X 1066mm
Wheelbase 1260 mm
Lowest distance to ground 135 mm
Seat height 745 mm
Filling weight 98 kg
Gas tank capacity 4.2 L

Frame

Frame type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 80/80 – 14 M/C 43P
Rear Tires 100/70 – 14 M/C 51P
Front Brake Disc Brake
Rear brake Drum Brake

Electricity

Ignition system TCI
Battery YUASA/YTZ6V
Spark Plug Type NGK/CR6HSA

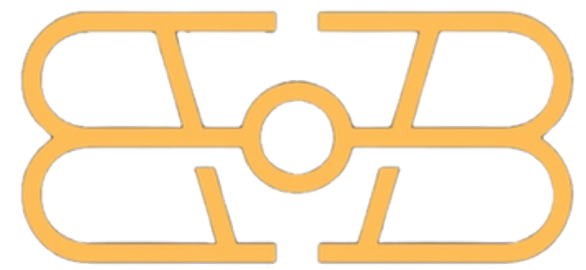

PT. BONEN HOKY SEJATI BERSAMA

Fino 125

FINO PREMIUM



CREAMY GREY



BLACK



WHITE LATTE




HEAD LIGHT



ECO
INDICATOR



SIDE
STAND SWITCH



FORGED & DIASIL



ADVANCE KEY



BAGGAGE



125 CC



SMART LOCK



FUEL TANK



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION – FINO PREMIUM



Machine

Machine type 4-Stroke, Air cooled, SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 9.5 : 1
Cylinder volume 125 cc
Maximum power 7.0 kW (9.52 PS) / 8000 rpm
Maximum torque 9.6 Nm (0.98 kgf.m) / 5500 rpm
Starter system Electric & kick starter
Lubrication system Wet
Engine oil capacity Total = 0.84 L ; Periodic = 0.80 L
Fuel System FI (Fuel Injection)
Clutch Type Dry Centrifugal Clutch
Transmission Type V-Belt Automatic

Dimension


L X W X H 1870mm X 700mm X 1066mm
Wheelbase 1260 mm
Lowest distance to ground 135 mm
Seat height 745 mm
Filling weight 98 kg
Gas tank capacity 4.2 L

Frame

Frame type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 80/80 – 14 M/C 43P
Rear Tires 100/70 – 14 M/C 51P
Front Brake Disc Brake
Rear brake Drum Brake

Electricity

Ignition system TCI
Battery YUASA/YTZ6V
Spark Plug Type NGK/CR6HSA

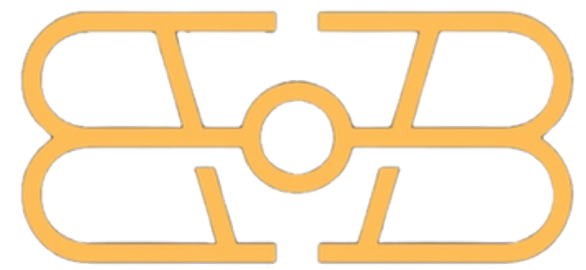

PT. BONEN HOKY SEJATI BERSAMA

Fino 125

FINO SPORTY



RED



RETRO GREY



TOSCA



HEAD LIGHT




ECO INDICATOR



ADVANCE KEY



SIDE STAND SWITCH



FORGED & DIASIL



SMART LOCK



BAGGAGE



125 CC



FUEL TANK



MY YAMAHA

SPECIFICATION – FINO SPORTY

Machine

Machine type 4-Stroke, Air cooled, SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 9.5 : 1
Cylinder volume 125 cc
Maximum power 7.0 kW (9.52 PS) / 8000 rpm
Maximum torque 9.6 Nm (0.98 kgf.m) / 5500 rpm
Starter system Electric & kick starter
Lubrication system Wet
Engine oil capacity Total = 0.84 L ; Periodic = 0.80 L
Fuel System FI (Fuel Injection)
Clutch Type Dry Centrifugal Clutch
Transmission Type V-Belt Automatic

Dimension


L X W X H 1870mm X 700mm X 1066mm
Wheelbase 1260 mm
Lowest distance to ground 135 mm
Seat height 745 mm
Filling weight 98 kg
Gas tank capacity 4.2 L

Frame

Frame type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 80/80 – 14 M/C 43P
Rear Tires 100/70 – 14 M/C 51P
Front Brake Disc Brake
Rear brake Drum Brake

Electricity

Ignition system TCI
Battery YUASA/YTZ6V
Spark Plug Type NGK/CR6HSA

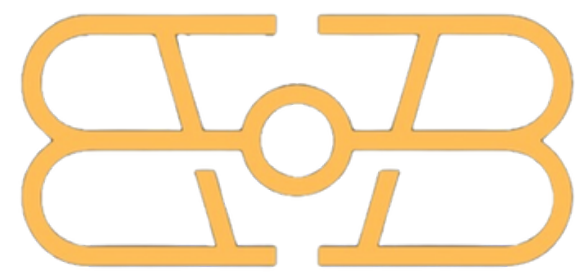

PT. BONEN HOKY SEJATI BERSAMA

fazzio
Hybrid Connected

FAZZIO NEO



ORANGE



DULL BLUE




RED



YELLOW



MINT



ELECTRIC
POWER SOCKET



BAGGAGE



HEAD LIGHT

FUEL TANK



SMART KEY



SMART LOCK



TUBELESS



FORGED & DIASIL



Y-CONNECT



MY YAMAHA



Hybrid



125 CC



DIGITAL
SPEEDOMETER



SMART MOTOR
GENERATOR



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-FAZZIO NEO



Machine

Machine type SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 11.0±0.4
Cylinder volume 124.86 cc
Maximum power 6.2 kW / 6500 rpm
Maximum torque 10.6 Nm / 4500 rpm
Starter system Electric starter
Lubrication system Wet sump
Engine oil capacity 0.84 L
Fuel System Fuel Injection
Clutch Type Centrifugal Clutch
Transmission Type Automatic

Dimension


L X W X H 1820mm X 685mm X 1125mm
Wheelbase 1280 mm
Lowest distance to ground 135 mm
Seat height 750 mm
Filling weight 95 kg
Gas tank capacity 5.1 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 - 12 47L
Rear Tires 110/70 - 12 47L
Front Brake Disc Brake
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition system TCI
Battery YTZ6V
Spark Plug Type CR6HSA

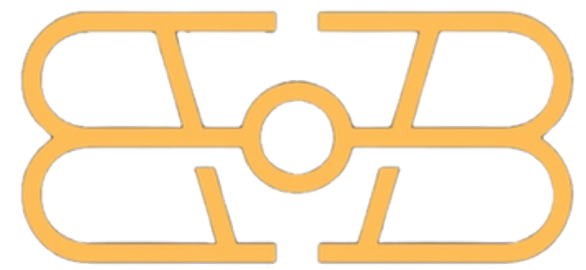

PT. BONEN HOKY SEJATI BERSAMA



FAZZIO LUX



BLACK



WHITE PEARL



PRESTIGE SILVER



ELECTRIC
POWER SOCKET




BAGGAGE



FUEL TANK



SMART KEY



SMART LOCK



TUBELESS



FORGED & DIASIL



Y-CONNECT



MY YAMAHA



125 CC



DIGITAL
SPEEDOMETER



SMART MOTOR
GENERATOR



HEAD LIGHT



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-FAZZIO LUX



Machine

Machine type SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 11.0±0.4
Cylinder volume 124.86 cc
Maximum power 6.2 kW / 6500 rpm
Maximum torque 10.6 Nm / 4500 rpm
Starter system Electric starter
Lubrication system Wet sump
Engine oil capacity 0.84 L
Fuel System Fuel Injection
Clutch Type Centrifugal Clutch
Transmission Type Automatic

Dimension


L X W X H 1820mm X 685mm X 1125mm
Wheelbase 1280 mm
Lowest distance to ground 135 mm
Seat height 750 mm
Filling weight 95 kg
Gas tank capacity 5.1 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 - 12 47L
Rear Tires 110/70 - 12 47L
Front Brake Disc Brake
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition system TCI
Battery YTZ6V
Spark Plug Type CR6HSA

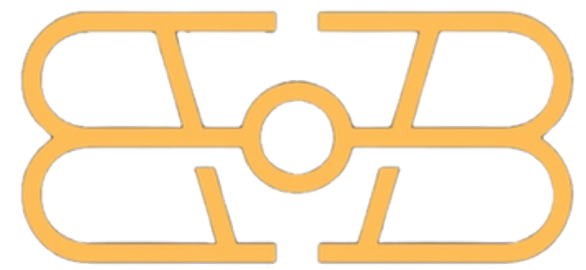

PT. BONEN HOKY SEJATI BERSAMA



Grand filano neo



DULL BLUE



RED



PINK MAUVE



TUSCANY YELLOW



BLACK



INFOTAINMENT
DISPLAY



SMART MOTOR
GENERATOR



HEAD LIGHT



ELECTRIC
POWER SOCKET



BAGGAGE



FUEL TANK



125 CC



SMART KEY



SMART LOCK



TUBELESS



DIGITAL
SPEEDOMETER



FORGED & DIASIL



Y-CONNECT



MY YAMAHA



FRONT
DISC BRAKE



HAZARD LAMP



STAND
SIDE SWITCH



ECO
INDICATOR



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-GRAND FILANO NEO



Machine

Machine type Air Cooled 4-Stroke, SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 11.0 : 1
Cylinder volume 124.86 cc
Maximum power 6.1 kW / 6500 rpm
Maximum torque 10.4 Nm / 5000 rpm
Starter system Electric starter
Lubrication system Wet
Engine oil capacity Total = 0,84 L ; Periodic = 0,80 L
Fuel System Fuel Injection
Clutch Type Centrifugal Clutch, Dry
Transmission Type V-Belt Automatic

Dimension


L X W X H 1820mm X 685mm X 1155mm
Wheelbase 1280 mm
Lowest distance to ground 125 mm
Seat height 790 mm
Filling weight 100 kg
Gas tank capacity 4.4 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 - 12 47L
Rear Tires 110/70 - 12 47L
Front Brake Disc Brake
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition system TCI
Battery YTZ6V
Spark Plug Type CR6HSA

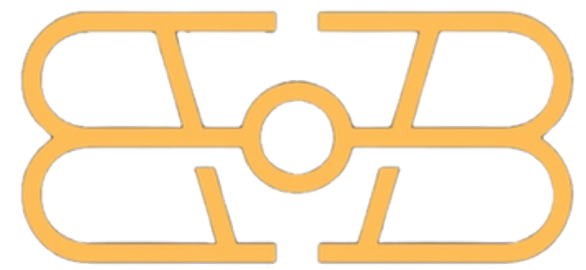

PT. BONEN HOKY SEJATI BERSAMA

GRAND
Filano
Hybrid Connected

YAMAHA

Grand filano lux



ELIXIR DARK SILVER



WHITE PEARL



INFOTAINMENT
DISPLAY



SMART MOTOR
GENERATOR



HEAD LIGHT



ELECTRIC
POWER SOCKET



BAGGAGE



FUEL TANK



125 CC



SMART KEY



SMART LOCK



TUBELESS



FORGED & DIASIL



Y-CONNECT



MY YAMAHA



DIGITAL
SPEEDOMETER



HAZARD LAMP



STAND
SIDE SWITCH



ECO
INDICATOR



FRONT
DISC BRAKE



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-GRAND FILANO LUX



Machine

Machine type Air Cooled 4-Stroke, SOHC
Cylinder arrangement Single cylinder
Diameter X Step 52.4 x 57.9 mm
Compression comparison 11.0 : 1
Cylinder volume 124.86 cc
Maximum power 6.1 kW / 6500 rpm
Maximum torque 10.4 Nm / 5000 rpm
Starter system Electric starter
Lubrication system Wet
Engine oil capacity Total = 0,84 L ; Periodic = 0,80 L
Fuel System Fuel Injection
Clutch Type Centrifugal Clutch, Dry
Transmission Type V-Belt Automatic

Dimension

L X W X H 1820mm X 685mm X 1155mm
Wheelbase 1280 mm
Lowest distance to ground 125 mm
Seat height 790 mm
Filling weight 100 kg
Gas tank capacity 4.4 L

Frame

Frame Type Underbone
Front Suspension Telescopic
Rear Suspension Unit Swing
Front Tire 110/70 - 12 47L
Rear Tires 110/70 - 12 47L
Front Brake Disc Brake
Rear Brake Drum Brake
Tire Type Tubeless

Electricity

Ignition system TCI
Battery YTZ6V
Spark Plug Type CR6HSA



CYAN



BLUE



RED



HEAD LIGHT



DIGITAL
SPEEDOMETER




150 CC



TUBELESS



HAZARD LAMP



LIQUID
COOLING



MY YAMAHA



FUEL TANK



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-MX KING 150



Machine

Machine Type Liquid cooled 4-stroke, SOHC
Number/Position of Cylinder Single Cylinder
Machine Capacity 150cc
Diameter x Step 57.0 mm x 58.7 mm
Compression Comparison 10.4 : 1
Maximum Power 11.3 kW / 8500 rpm
Maximum Torque 13.8 Nm/ 7000 rpm
Sistem Starter Electric Starter & Kick Starter
Lubrication System Wet
Engine Oil Capacity Total = 1.15 L ; Periodic 0.95 L
Oil Filter ; 1,00 L
Fuel System FI (Fuel Injection)
Clutch Type Wet, Manual Clutch, Multiplat
Transmission Type Constant Mesh, 5-Speed
Transmission Operating Pattern 1-N-2-3-4-5

Dimension

L X W X H 1985mm X 670mm X 1100mm
Wheelbase 1290 mm
Lowest distance to ground 155 mm
Seat height 795 mm
Filling weight 118 kg
Gas tank capacity 4.2 L

Frame

Backbone
Frame Type
Front Suspension Telescopic
Rear Suspension Monoshock
Front Tire 90/80-17M/C 46P
Rear Tires 120/70-17M/C 58P
Front Brake Single Disc Brake
Rear brake Single Disc Brake

Electricity

Ignition system TCI
Battery GTZ4V/ YTZ4V
Spark Plug Type NGK/CR8E

UPITER
Yang Lain... Semakin Keting




METALLIC
BLACK



METALLIC RED



METALLIC CYAN



HEAD LIGHT



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-JUPITER Z1



Machine

Machine Type Air cooled 4-stroke, SOHC
Number/Position of Cylinder Single Cylinder
Machine Capacity 115cc
Diameter x Step 50.0 mm x 57.9 mm
Compression Comparison 9.3 : 1
Maximum Power 7.4 kW / 7750 rpm
Maximum Torque 9.8 Nm/ 6750 rpm
Sistem Starter Electric Starter & Kick Starter
Lubrication System Wet
Engine Oil Capacity Total = 1.00 L ; Periodic 0.80 L
Oil Filter ; 0,85 L
Fuel System FI (Fuel Injection)
Clutch Type Wet, Centrifugal Automatic,
Multiplat
Transmission Type Constant Mesh, 4-Speed

Dimension


L X W X H 1935mm X 680mm X 1065mm
Wheelbase 1240 mm
Lowest distance to ground 150 mm
Seat height 765 mm
Filling weight 101 kg (Spoke Wheel) ; 102 kg (Cast Wheel)
Gas tank capacity 4.1 L

Frame

Frame Type Backbone
Front Suspension Telescopic
Rear Suspension Swing Arm
Front Tire 70/90-17M/C 38P
Rear Tires 80/90-17M/C 44P
Front Brake Single Disc Brake
Rear brake Drum Brake

Electricity

Ignition system TCI
Battery YTZ4V/ GTZ4V
Spark Plug Type NGK/CR6H5A

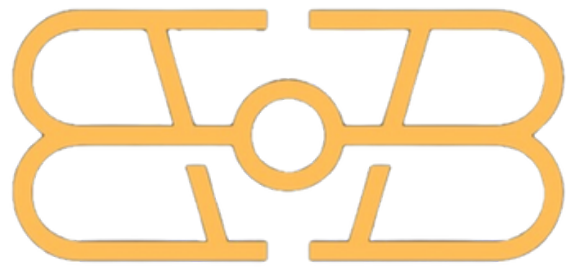

PT. BONEN HOKY SEJATI BERSAMA

ALL NEW
XSR155
SPORT HERITAGE



RED



BLACK



SILVER



BLUE

VVA
VARIABLE
VALVE ACTUATION

LED

TAIL LIGHT

LED

HEAD LIGHT



ALUMINIUM
REAR ARM



FRONT & REAR
DISC BRAKE



6 SPEED
TRANSMISSION



FORGED & DIASIL



DELTA BOX
FRAME



10.4 l
FUEL TANK



TUBELESS



155 CC



LIQUID
COOLING



DIGITAL
SPEEDOMETER



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-XSR 155



Machine

Machine type Liquid cooled, 4-Stroke, SOHC, 4 Valves, VVA
Number/position of cylinders single cylinder
Diameter x Step 58,0 x 58,7 mm
Compression comparison 11,6 : 1
Maximum power 14.2 kW/ 10000 rpm
Maximum torque 14.7 Nm/ 8500 rpm
Sistem starter Electric Starter
Lubrication system Wet
Engine oil capacity Total = 1.50 L; Periodic = 0.85 L;
Glove Oil Filter = 0.95 L
Fuel system Fuel Injection
Volume Silinder 155 cc
Clutch Type Wet Type Multi-Plate Clutch;
Assist & Slipper Clutch
Transmission Type Manual
Transmission Operating Pattern 1-N-2-3-4-5-6

Dimension


L X W X H 2007 X 804 X 1080
Wheelbase 1330 mm
Lowest distance to ground 170 mm
Seat height 810 mm
Fill Weight 134 kg
Petrol tank capacity 10.4 Liter

Frame

Frame type Deltabox
Front Suspension Telescopic Form (Inverted)
Rear Suspension Link Monoshock
Front Tire 110/70-17M/C (54S)
Rear Tire 140/70-17M/C (66S)
Front Brake Disc Brake
Rear Brake Disc Brake

Electricity

Ignition system TCI/Transistor
Battery YTZ4V
Spark Plug Type MR8E9

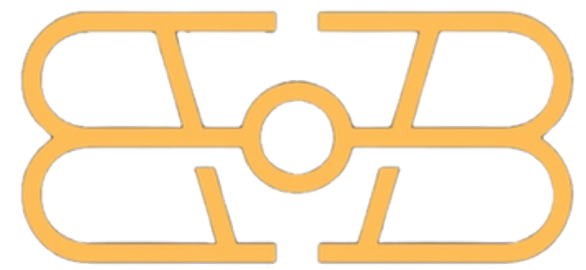

PT. BONEN HOKY SEJATI BERSAMA

ALL NEW
R15
Connected



BLUE



BLACK



GREY



155 CC



FRONT & REAR
DISC BRAKE



FORGED & DIASIL



LIQUID
COOLING



ALUMINIUM
REAR ARM



ASSISTS
&
SLIPPER CLUTCH



TUBELESS



UP SIDE DOWN
SUSPENSION



DIGITAL
SPEEDOMETER



HEAD LIGHT



DELTABOX
FRAME



6 SPEED
TRANSMISSION



TAIL LIGHT



Y-CONNECT



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-R15 CONNECTED



Machine

Machine Type Liquid Cooled 4-stroke, SOHC, 4 Valve, VVA
Fill Cylinder 155.09cc
Number / Position Of Cylinders Single Cylinder
Diameter X Step 58,0 X 58,7 Mm
Compression Comparison $11.6 \pm 0.4 : 1$
Maximum Power 14,2 Kw/10000rpm
Maximum Torque 14,7 Nm/8500rpm
Sistem Starter Electric Starter Wet Sump Total = 1.15L ;
Lubrication System Periodically = 0.95 L ;
Engine Oil Capacity
Change Oil Filter = 1 L
Fuel System Fuel Injection
Clutch Type Multy Wet Clutch
Transmission Type Manual
Transmission Operating Pattern 1-N-2-3-4-5-6

Dimension

L X W X H 1990mm X 725mm X 1135mm
Lowest Distance To The Ground 170 mm
Seat Height 815 mm
Contents Weight 137 Kg
Gasoline Tank Capacity 11 L
Wheel Axis Distance 1325 mm

Frame

Frame Type Deltabox
Front Suspension Teleskopic Fork (Inverted)
Rear Suspension Link Monoshock
Front Tire 100/80-17m/C 52p
Rear Ban 140/70-17m/C 66s
Front Brake Disc Brake
Rear Brake Disc Brake

Electricity

Ignition System TCI
Battery GTZ4V/YTZ4V
Plug Type MR8E9

ALL NEW
R15M
— Connected - ABS



ALL NEW R 15M CONNECTED - ABS

VVA
VARIABLE
VALVE ACTUATION

TCS
TRACTION
CONTROL
SYSTEM

ASC
ASSISTS
&
SLIPPER CLUTCH

ABS
ANTI-LOCK
BRAKING
SYSTEM

6
SPEED
TRANSMISSION

155 CC

LED
HEAD & TAIL
LIGHT

QS
QUICK SHIFTER

YAMAHA
MOTORCYCLE
CONNECT
Y-CONNECT

**FRONT & REAR
DISC BRAKE**

**ALUMINIUM
REAR ARM**

FORGED & DIASIL

**DIGITAL
SPEEDOMETER**

TUBELESS

**DELTA BOX
FRAME**

**LIQUID
COOLING**

**UP SIDE DOWN
SUSPENSION**

YAMAHA
MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-R15 M C/ABS



Machine

Machine Type Liquid Cooled 4-stroke, SOHC, 4 Valve, VVA
Fill Cylinder 155.09cc
Number / Position Of Cylinders Single Cylinder
Diameter X Step 58,0 X 58,7 Mm
Compression Comparison $11.6 \pm 0.4 : 1$
Maximum Power 14,2 Kw/10000rpm
Maximum Torque 14,7 Nm/8500rpm
Sistem Starter Electric Starter Wet Sump Total = 1.15L ;
Lubrication System Periodically = 0.95 L ;
Engine Oil Capacity
Change Oil Filter = 1 L
Fuel System Fuel Injection
Clutch Type Multy Wet Clutch
Transmission Type Manual
Transmission Operating Pattern 1-N-2-3-4-5-6

Dimension

L X W X H 1990mm X 725mm X 1135mm
Lowest Distance To The Ground 170 mm
Seat Height 815 mm
Contents Weight 140 Kg
Gasoline Tank Capacity 11 L
Wheel Axis Distance 1325 mm

Frame

Frame Type Deltabox
Front Suspension Telescopic Fork (Inverted)
Rear Suspension Link Monoshock
Front Tire 100/80-17m/C 52p
Rear Ban 140/70-17m/C 66s
Front Brake Disc Brake
Rear Brake Disc Brake

Electricity

Ignition System TCI
Battery YTZ6V
Plug Type NGK/MR8E9

R25

R25 ABS VERSION



BLACK



BLUE





PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-R25 ABS



Machine

Machine Type Liquid Cooled 4-stroke, DOHC
Number / Position Of Cylinders In Line 2 Cylinder
Diameter X Step 60,0 X 44,1 mm
Compression Comparison 11.6 : 1
Maximum Power 26,5 Kw/12000rpm
Maximum Torque 23,6 Nm/10000rpm
Sistem Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total = 2.40 L ; Periodically = 1.80 L ;
Change Oil Filter = 2.10 L
Fuel System Fuel Injection
Clutch Type Wet ; Manual Clutch ; Multyplat
Transmission Type Constant Mesh 6-Speed

Dimension


L X W X H 2090mm X 720mm X 1135mm
Lowest Distance To The Ground 160 mm
Seat Height 780 mm
Contents Weight 166 Kg
Gasoline Tank Capacity 14 L
Wheel Axis Distance 1380 mm

Frame

Frame Type Diamond
Front Suspension Telescopic
Rear Suspension Swing Arm
Front Tire 110/70-17 M/C 54S
Rear Ban 140/70-17 M/C 66S
Front Brake Disc Hidraulic, Double Piston
Rear Brake Disc Hidraulic, Single Piston

Electricity

Ignition System TCI
Battery GTZ8V
Plug Type NGK/CR9E

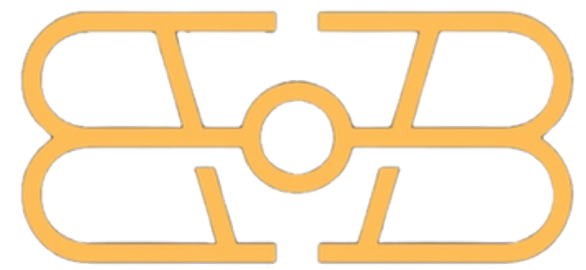

PT. BONEN HOKY SEJATI BERSAMA

R25

STANDARD VERSION



BLACK



RED



BLUE



250 CC



SHIFT
TIMING LIGHT



FORGED & DIASIL



6 SPEED
TRANSMISSION



UP SIDE DOWN
SUSPENSION



HEAD LIGHT



TUBELESS



LIQUID
COOLING



TAIL LIGHT



FUEL TANK



DIGITAL
SPEEDOMETER



MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-R25 STANDARD VERSION



Machine

Machine Type Liquid Cooled 4-stroke, DOHC
Number / Position Of Cylinders In Line 2 Cylinder
Diameter X Step 60,0 X 44,1 mm
Compression Comparison 11.6 : 1
Maximum Power 26,5 Kw/12000rpm
Maximum Torque 23,6 Nm/10000rpm
Sistem Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total = 2.40 L ; Periodically = 1.80 L ;
Change Oil Filter = 2.10 L
Fuel System Fuel Injection
Clutch Type Wet ; Manual Clutch ; Multyplat
Transmission Type Constant Mesh 6-Speed

Dimension


L X W X H 2090mm X 720mm X 1135mm
Lowest Distance To The Ground 160 mm
Seat Height 780 mm
Contents Weight 166 Kg
Gasoline Tank Capacity 14 L
Wheel Axis Distance 1380 mm

Frame

Frame Type Diamond
Front Suspension Telescopic
Rear Suspension Swing Arm
Front Tire 110/70-17 M/C 54S
Rear Ban 140/70-17 M/C 66S
Front Brake Disc Hidraulic, Double Piston
Rear Brake Disc Hidraulic, Single Piston

Electricity

Ignition System TCI
Battery GTZ8V
Plug Type NGK/CR9E

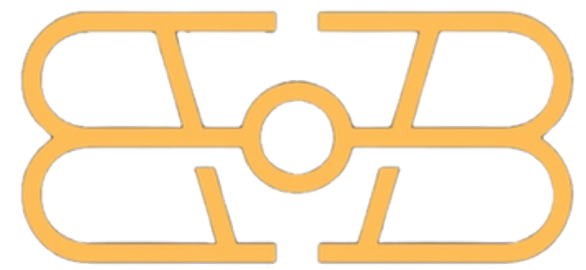

PT. BONEN HOKY SEJATI BERSAMA



MT-25



DARK GREY



BLUE




UP SIDE DOWN
SUSPENSION



DIGITAL
SPEEDOMETER



FUEL TANK



LIQUID
COOLING




6 SPEED
TRANSMISSION



HEAD LIGHT



TUBELESS



FORGED & DIASIL



MY YAMAHA



250 CC



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-MT 25



Machine

Machine type Liquid cooled, 4-Stroke, DOHC
Number/position of cylinder 2 Cylinder/ Upright
Diameter x Step 60,0 x 44,1 mm
Compression comparison 11,6 : 1
Maximum power 26.5 kW/ 12000 rpm
Maximum torque 23.6 Nm/ 10000 rpm
Sistem starter Electric Starter
Lubrication system Wet
Engine oil capacity Total = 2.40 L; Periodic = 1.80 L;
Glove Oil Filter = 2.10 L
Fuel system Fuel Injection

Dimension


L X W X H 2090 X 755 X 1071 mm
Wheelbase 1380 mm
Lowest distance to ground 160 mm
Seat height 780 mm
Fill Weight 165 kg
Petrol tank capacity 14 L

Frame

Frame type Diamond
Front Suspension Telescopic Fork (Inverted)
Rear Suspension Linkless Monoshock
Front Tire 110/70-17M/C (54S)
Rear Tire 140/70-17M/C (66S)
Front Brake Single Disc Brake
Rear Brake Single Disc Brake

Electricity

Ignition system TCI
Battery YTZ8V
Spark Plug Type NGK/CR93

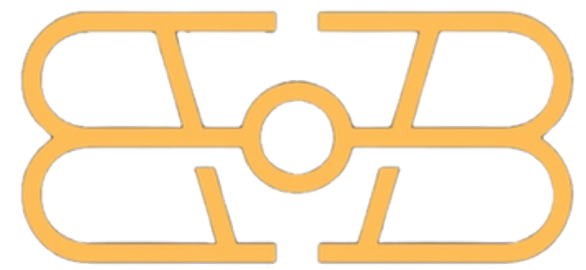

PT. BONEN HOKY SEJATI BERSAMA



MT-15



METTALIC DARK
GREY



METTALIC BLUE

VVA
VARIABLE
VALVE ACTUATION

LED
HEAD & TAIL
LIGHT

ASC
ASSISTS
&
SLIPPER CLUTCH

6
SPEED
TRANSMISSION

**DELTA BOX
FRAME**

TUBELESS

155 CC

**UP SIDE DOWN
SUSPENSION**

FORGED & DIASIL

10.4 l
FUEL TANK

**LIQUID
COOLING**

**DIGITAL
SPEEDOMETER**

**ALUMINIUM
REAR ARM**

YAMAHA
MY YAMAHA



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-MT 15



Machine

Machine type Liquid cooled, 4-Stroke, SOHC, 4 Valves, VVA
Number/position of cylinder Single Cylinder
Diameter x Step 58,0 x 58,7 mm
Compression comparison 11,6 : 1
Maximum power 14.2 kW/ 10000 rpm
Maximum torque 14.7 Nm/ 8500 rpm
Sistem starter Electric Starter
Lubrication system Wet
Engine oil capacity Total = 1.50 L; Periodic = 0.85 L;
Glove Oil Filter = 0.95 L
Fuel system Fuel Injection
Volume Cylinder 155 cc
Clutch Type Wet Type Multy-Plate Clutch ;
Assist & Slipper Clutch
Transmission Type Manual
Transmission Operating Pattern 1-N-2-3-4-5-6

Dimension

L X W X H 1965 X 800 X 1065 mm
Wheelbase 1335 mm
Lowest distance to ground 155 mm
Seat height 810 mm
Fill Weight 133 kg
Petrol tank capacity 10.4 L

Frame

Frame type Deltabox
Front Suspension Telescopic Form (Inverted)
Rear Suspension Link Monoshock
Front Tire 110/70-17M/C (54S)
Rear Tire 140/70-17M/C (66S)
Front Brake Disc Brake
Rear Brake Disc Brake

Electricity

Ignition system CDI/Transistor
Battery YTZ4V
Spark Plug Type MR8E9

VIXION R VERSION





PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-VIXION R VERSION



Machine

Sistem Starter Electric starter
Lubrication System Wet sump
Fuel System Fuel Injection
Clutch Type Wet Type Multi-Plate Clutch ;
Assist and Slipper Clutch
Transmission Type Manual
Machine Type Liquid Cooled 4-stroke, SOHC, 4 Valve, VVA
Cylinder Order Single Cylinder
Diameter X Step 58 x 58.7 mm
Compression Comparison 11.6 ±0.4
Volume Cylinder 155.1 cc
Maximum Power 14.2 kW / 10000 rpm
Maximum Torque 14.7 Nm / 8500 rpm

Dimension

L X W X H (Length x Width x Height) 1950 x 720 x 1025 mm
Wheel Axis Distance 1320 mm
Lowest Distance To The Ground 165 mm
Seat Height 795 mm
Contents Weight 131 Kg
Gasoline Tank Capacity 11 L


Frame

Frame Type Deltabox
Front Suspension Telescopic
Rear Suspension Swing Arm
Tire Type Tubeless
Front Tire 90/80-17M/C 46P
Rear Tire 130/70-17M/C 62P
Front Brake Disc brake
Rear Brake Disc brake

Electricity TCI

Ignition System

Battery YTZ4V/GTZ4V
Plug Type NGK/MR8E9

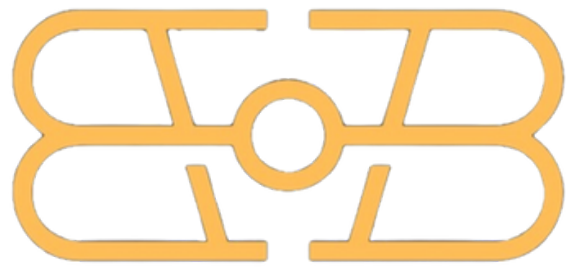

PT. BONEN HOKY SEJATI BERSAMA



VIXION
LIVE THE LEGEND



MATTE BLACK



MATTE BLUE



METALLIC RED



6 SPEED
TRANSMISSION



HAZARD LAMP



ASSISTS
&
SLIPPER CLUTCH



FRONT & REAR
DISC BRAKE



DELTABOX
FRAME



HEAD & TAIL
LIGHT



LIQUID
COOLING



FORGED & DIASIL



FUEL TANK



150 CC



DIGITAL
SPEEDOMETER



MY YAMAHA



TUBELESS



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-VIXION 150



Machine

Sistem Starter Electric starter Wet sump Total = 1.15L ;
Lubrication System Periodically = 0.95 L ;
Engine Oil Capacity
Change Oil Filter = 1 L
Fuel System Fuel Injection
Clutch Type Wet Type Multi-Plate Clutch ;
Assist and Slipper Clutch
Transmission Type Manual
Machine Type Liquid Cooled 4-stroke, SOHC
Cylinder Order Single Cylinder
Diameter X Step 57 x 58.7 mm
Compression Comparison 10.4 : 1
Volume Silinder 149.8 cc
Maximum Power 12.2 kW / 8500 rpm
Maximum Torque 14.5 Nm / 7500 rpm

Dimension

L X W X H (Length x Width x Height) 1955 x 720 x 1025 mm
Wheel Axis Distance 1295 mm
Lowest Distance To The Ground 165 mm
Seat Height 795 mm
Contents Weight 132 Kg
Gasoline Tank Capacity 12 L

Frame

Frame Type Deltabox
Front Suspension Telescopic
Rear Suspension Swing Arm
Tire Type Tubeless
Front Tire 90/80-17M/C 46P
Rear Tire 120/70-17M/C 58P
Front Brake Disc brake
Rear Brake Disc brake

Electricity

TCI
Ignition System
Battery YTZ4V/GTZ4V
Plug Type NGK/CR8E

WR
THE REAL ADVENTURE PARTNER **155R**
NEW GRAPHIC



VVA
VARIABLE
VALVE ACTUATION



6 SPEED
TRANSMISSION



FRONT & REAR
DISC BRAKE



HAZARD LAMP



155 CC



ADJUSTABLE
SUSPENSION



DIGITAL
SPEEDOMETER



LIQUID
COOLING



MY YAMAHA



8.1 l
FUEL TANK



FORGED & DIASIL



PT. BONEN HOKY SEJATI BERSAMA

SPECIFICATION-WR 155R



Machine

Machine Type Liquid Cooled, 4-stroke, SOHC, 4 Valves, VVA
Number/Position Of Cylinder Single Cylinder
Diameter X Step 58,0 X 58,7 Mm
Compression Comparison 11,6 : 1
Maximum Power 12,3 KW/10.000 Rpm
Maximum Torque 14,3 Nm/ 6500 Rpm
Sistem Starter Electric Starter
Lubrication System Wet
Engine Oil Capacity Total = 1.50 L; Periodic = 0.85 L;
Glove Oil Filter = 0.95 L
Fuel System Fuel Injection
Volume Cylinder 155 Cc
Clutch Type Wet Type Multi-plate
Transmission Type Manual
Transmission Operating Pattern 1-N-2-3-4-5-6

Dimension

L X W X H 2145mm x 840mm x 1200mm
Wheelbase 1430 mm
Lowest distance to ground 245 mm
Seat height 880 mm
Fill Weight 134 kg
Petrol tank capacity 8.1 Liter

Frame

Frame Type Semi Double Cradle
FRONT SUSPENSION Telescopic 41 mm
REAR SUSPENSION Monoshock
Front Tire 2,75-21 45p
Rear Tire 4,10-18 59p
Front Brake 240mm Wave Disc
Rear Brake 220mm Wave Disc

Electricity TCI/Transistor

Ignition System MR8E9
Battery YTZ4V
Spark Plug Type

THANK YOU!



WILDY VARIAN

Marketing Manager



+62811 97 98981



wildy@bhsb.co.id



www.bhsb.co.id



Kawasan Industri Kencana Alam,
Kav 23D, Kelurahan Sukanagara,
Kec. Cikupa, Kab. Tangerang,
Prov. Banten,
Indonesia – 15710



Scan Me!

*Notes : * incoterms FOB, Jakarta Port
* Price Valid Date Please Verify..*