

LX1 Lug Pattern



- Less Vibration
- Traction
- Self-Cleaning
- Cut-And-Chip Resistance
- Even Tread Wear

F1 Lug Pattern



G3 Lug Pattern



XC Lug Pattern



- Less Vibration
- Traction
- Self-Cleaning
- Cut-And-Chip Resistance
- Even Tread Wear

ST1 Lug Pattern



ST2 Lug Pattern



LX2 Lug Pattern



- Less Vibration
- Traction
- Self-Cleaning
- Cut-And-Chip Resistance
- Even Tread Wear

F2 Lug Pattern



LS Lug Pattern



F3 Lug Pattern



M Lug Pattern



- Less Vibration
- Traction
- Self-Cleaning
- Cut-And-Chip Resistance
- Even Tread Wear

G1 Lug Pattern



GT4 Lug Pattern



Contact Us:

Email: twintrade@outlook.com

Phone: +34 613 962 860 (WhatsApp)

TWINTRADE

TWINTRADE

38 INCH RIM

M

LX1

LS

NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE psi - kgf/cm ²	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
1	18.4 - 38	LS	R1	12	1770	490	50	23	34.8psi - 240kpa	30	3550	W16
2		LS	R1	16	1770	490	50	23	34.8psi - 240kpa	30	3675	W16
3	16.9 - 38	LX1	R1	12	1670	424	47	22	29psi - 200kpa	30	2760	W15L
4		LX1	R1	16	1670	424	47	22	31psi - 213kpa	30	2990	W15L
5	15.5/16.9 - 38	M	R2	12	1620	432	60	17	30psi - 210kpa	30	2520	W15L
6		M	R2	16	1620	432	60	17	33psi - 230kpa	30	2760	W15L
7	15.5 - 38	LX1	R1	12	1578	400	39	22	28psi - 190kpa	30	2125	W14L
8		LX1	R1	16	1578	400	39	22	30psi - 210kpa	30	2320	W14L

36 INCH RIM

M

LX2

NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE psi - kgf/cm ²	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
1	15.5 - 36	M	R2	12	1514	394	63	16	28psi - 190kpa	30	2120	W12
2	13.6 - 36	LX2	R1	12	1465	314	35	19	29psi - 200kpa	30	1208	W12
3	12.4 - 36	LX2	R1	12	1465	314	35	19	29psi - 200kpa	30	1208	W12

34 INCH RIM

LX1

LX2

NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE psi - kgf/cm ²	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
1	18.4 - 34	LX2	R1	16	1670	470	50	21	34.8psi - 240kpa	30	3450	W16L
2		LX2	R1	12	1670	470	50	21	34.8psi - 240kpa	30	3450	W16L
3	16.9 - 34	LS	R1	12	1585	430	50	21	33psi - 230kpa	30	3240	W15L
4		LS	R1	16	1585	430	50	21	33psi - 230kpa	30	3240	W15L

32 INCH RIM

M

LS

NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE psi - kgf/cm ²	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
1	12.4 - 32	M	R2	12	1310	344	55	14	33psi - 230kpa	30	1880	W12
2	12.4 - 32	LS	R1	12	1365	378	40	18	28psi - 190kpa	30	1880	W12



Contact Us:

Email: twintrade@outlook.com

Phone: +34 613 962 860 (WhatsApp)

TWINTRADE

TWINTRADE

30 INCH RIM

M

F2

LS

LX2

NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE psi - kgf/cm ²	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
1	18.4 - 30	M	R2	12	1564	460	77	16	27.5psi - 190kpa	30	2385	W16L
2		M	R2	16	1564	460	77	16	30psi - 210kpa	30	2640	W16L
3	18.4 - 30	F2	R1	12	1550	470	42	21	33Psi - 230kpa	30	2980	W16L
4		F2	R1	16	1550	470	42	21	33Psi - 230kpa	30	2980	W16L
5	18.4 - 30	LS	R1	12	1560	480	50	21	33psi - 230kpa	30	2980	W16L
6		LS	R1	16	1560	480	50	21	33psi - 230kpa	30	2980	W16L
7	18.4 - 30	LX2	R1	12	1522	424	49	21	24.6psi - 170kpa	30	2385	W16L
8		LX2	R1	16	1522	424	49	21	26 psi - 180kpa	30	2740	W16L
9	16.9 - 30	LX2	R1	12	1522	424	49	21	24.6psi - 170kpa	30	2385	W15L
10	16.9 - 30	M	R2	12	1482	430	72	15	29psi - 200kpa	30	2230	W15L
11	16.9 - 30	LS	R1	12	1490	429	48	20	24.6psi - 170kpa	30	2385	W15L
12		LS	R1	16	1490	429	48	20	24.6psi - 170kpa	30	2385	W15L



28 INCH RIM

M

LS

NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE psi - kgf/cm ²	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
1	18.4 - 28	M	R2	12	1478	420	72	15	29psi - 200kpa	30	2230	W16L
2		M	R2	16	1478	420	72	15	33psi - 230kpa	30	2520	W16L
3	16.9 - 28	LS	R1	12	1430	435	45	20	25 psi - 170kpa	30	2175	W15L
4	16.9 - 28	M	R2	12	1410	392	57	15	23psi - 160kpa	30	2175	W15L
5		M	R2	16	1410	392	57	15	23psi - 160kpa	30	2375	W15L
6	14.9 - 28	LS	R1	12	1365	378	40	19	28psi - 190kpa	30	1880	W13
7	14.9 - 28	M	R2	12	1310	344	55	14	33psi - 230kpa	30	1880	W13
8	13.6 - 28	LS	R1	12	1315	345	45	20	33psi - 230kpa	30	1880	W13
9	12.4 - 28	LS	R1	12	1260	315	40	18	28psi - 190kpa	30	1500	W11
10	12.4 - 28	M	R2	12	1280	364	60	14	28psi - 190kpa	30	1500	W11
11	13.6 - 28	M	R2	12	1280	364	60	14	28psi - 190kpa	30	1500	W11

26 INCH RIM

M

LS

NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE psi - kgf/cm ²	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
1	13.6 - 26	LS	R1	12	1260	315	40	18	28psi - 190kpa	30	1500	W12
2	13.6 - 26	M	R2	12	1280	364	60	14	28psi - 190kpa	30	1500	W12
3	12.4 - 26	M	R2	12	1210	320	48	14	29psi - 200kpa	30	1500	W12

Contact Us:

Email: twintrade@outlook.com

Phone: +34 613 962 860 (WhatsApp)

TWINTRADE

TWINTRADE

24 INCH RIM



NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
									psi - kgf/cm²			
1	14.9 - 24	LX2	R1	12	1265	360	38	17	33psi - 230kpa	30	1550	W12
2	13.6 - 24	M	R2	12	1204	320	55	14	28psi - 190kpa	30	1545	W12
3	12.4 - 24	LS	R1	12	1185	295	43	19	33psi - 230kpa	30	1490	W11
4		LS	R1	16	1185	295	43	19	33psi - 230kpa	30	1550	W11
5	12.4 - 24	F2	R1	12	1160	286	28	18	33psi - 230kpa	30	1550	W11
6	12.4 - 24	M	R2	12	1164	286	47	14	33psi - 230kpa	30	1490	W11
7	11.2 - 24	LS	R1	12	1105	280	38	18	33psi - 230kpa	30	1380	W10
8	11.2 - 24	G1	R2	12	1107	276	48	14	29psi - 200kpa	30	1380	W10
9	9.5 - 24	LS	R1	12	1060	242	38	17	28psi - 190kpa	30	1250	W8
10	9.5 - 24	F3	R1	12	1050	247	30	18	28psi - 190kpa	30	1245	W8
11	9.5 - 24	G1	R2	12	1090	260	50	14	28psi - 190kpa	30	1245	W8
12	8.3 - 24	G1	R2	8	982	224	45	15	29psi - 200kpa	30	672	W7
13	8.3 - 24	F3	R1	8	995	210	28	17	33psi - 230kpa	30	672	W7

22 INCH RIM



NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
									psi - kgf/cm²			
1	9.5 - 22	LS	R1	12	960	234	40	15	33psi - 230kpa	30	695	W8
2	9.5 - 22	G1	R2	8	980	220	40	15	33psi - 230kpa	30	650	W8
3	9.5 - 22	F3	R1	12	1010	240	40	17	33psi - 230kpa	30	695	W8
4	8.3 - 22	G1	R2	12	980	220	40	15	33psi - 230kpa	30	650	W7

20 INCH RIM



NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
									psi - kgf/cm²			
1	11.2 - 20	LX1	R1	12	979	194	24	18	28psi - 190kpa	30	1085	W9
2	11.2 - 20	G1	R2	12	995	268	47	14	28psi - 190kpa	30	1085	W9
3	9.5 - 20	M	R2	12	860	240	42	13	33psi - 230kpa	30	820	W8
4	8.3 - 20	LS	R1	8	890	210	40	14	33psi - 230kpa	30	710	W7

18 INCH RIM



NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
									psi - kgf/cm²			
1	8 - 18	F1	R1	8	840	210	30	15	29psi - 200kpa	30	630	7
2	8 - 18	GT4	R2	8	840	210	32	14	29psi - 200kpa	30	850	7



Contact Us:






Email: twintrade@outlook.com

Phone: +34 613 962 860 (WhatsApp)

TWINTRADE

TWINTRADE

16 INCH RIM

LS		G1				F1		GT4		F2		
												
NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
									psi - kgf/cm²			
1	9.00 - 16	LS	R1	8	890	210	40	14	33psi - 230kpa	30	900	7
2	9.00 - 16	G1	R2	8	836	204	46	12	29psi - 200kpa	30	630	7
3		G1	R2	16	836	204	46	12	29psi - 200kpa	30	630	6
4	8 - 16	GT4	R2	8	790	210	32	13	29Psi - 200kpa	30	770	6
5	8.00 - 16 L	G1	R2	4	836	204	46	12	29psi - 200kpa	30	630	6
6		G1	R2	8	836	204	46	12	29psi - 200kpa	30	630	6
7	8.00 - 16 A	G1	R2	8	831	204	42	13	29psi - 200kpa	30	630	6
8		G1	R2	4	831	204	42	13	29psi - 200kpa	30	630	6
9	8.00 - 16	F1	R1	8	840	210	30	15	29Psi - 200kpa	30	630	6
10	8 - 16 N	F1	R1	8	805	195	25	17	29Psi - 200kpa	30	630	5.5
11	7.50 - 16	F1	R1	4	805	195	25	17	29Psi - 200kpa	30	610	5.5
12		F1	R1	8	805	195	25	17	29Psi - 200kpa	30	650	5.5
13		F1	R1	12	805	195	25	17	29Psi - 200kpa	30	680	5.5
14	7.50 - 16	F2	R1	4	820	175	22	18	29Psi - 200kpa	30	610	5.5
15		F2	R1	8	820	175	22	18	29Psi - 200kpa	30	650	5.5
16	7 - 16	GT4	R2	8	742	183	31	13	29Psi - 200kpa	30	700	6

14 INCH RIM

		XC				G3							
													
NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER (mm)	SECTION WIDTH (mm)	LUG DEPTH (mm)	NUMBER OF LUG	INFLATION PRESSURE		MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
									psi - kgf/cm²				
1	7 - 14	XC	R2	8	705	190	27	12	29psi - 200kpa		30	450	5
2	6.50 - 14	G3	R1	14	680	180	30	13	34.8psi - 240kpa		30	600	5
3	6 - 14	XC	R2	8	655	157	25	14	30psi - 210kpa		30	455	5

12 INCH RIM

G3				XC								
												
STT	SIZE	KIỂU GAI	MÃ (TRA)	SỐ Lốp BỐ (P.R.)	CHIỀU CAO (mm)	CHIỀU RỘNG (mm)	SAU GAI (mm)	SỐ LƯỢNG GAI	ÁP SUẤT Lốp	TỐC ĐỘ (KM/H)	TẢI TRỌNG (KG)	BỀ RỘNG MÃM (inch)
									psi - kgf/cm²			
1	6.50 - 12	G3	R1	14	670	170	27	13	30psi - 210kpa	30	455	5
2	6.50 - 12 A	G3	R1	18	680	180	30	13	34.8psi - 240kpa	30	600	5
3	6.00 - 12	G3	R1	14	633	170	27	14	30psi - 210kpa	30	455	5
4		G3	R1	10	633	170	27	14	30psi - 210kpa	30	455	5
5	6 - 12	XC	R2	8	620	168	27	13	29psi - 200kpa	30	400	5
6	5 - 12	XC	R2	6	568	126	22	14	29psi - 200kpa	30	330	4

Rib Tractor Tires

		ST1		ST2							
											
NO	SIZE	LUG CODE	TRA CODE	PLY RATING (P.R.)	OVERALL DIAMETER	SECTION WIDTH	LUG DEPTH	INFLATION PRESSURE	MAX SPEED (KM/H)	MAX LOAD (KG)	RIM WIDTH
					(mm)	(mm)	(mm)	psi - kgf/cm ²			
1	9.00 - 20	ST1	F1	12	946	210	21	33psi - 230kpa	30	955	5.5
2	7.50 - 20	ST1	F1	8	902	188	19	30psi - 210kpa	30	875	5.5
3	6.00-16	ST1	F1	8	735	170	18	33psi - 230kpa	30	515	4
4	5.50-16	ST1	F1	6	728	146	14	30psi - 210kpa	30	515	4
5	5.00-15	ST1	F1	6	662	130	12	30psi - 210kpa	30	385	3
6	4.00-15	ST1	F1	6	644	116	10	30psi - 210kpa	30	360	3
7	6.00-14	ST1	F1	6	695	155	14	33psi - 230kpa	30	540	4.5
8	5.60-13	ST1	F1	6	620	150	13	36psi - 250kpa	30	475	4
9	4.00-12	ST1	F1	6	545	114	10	30psi - 210kpa	30	270	3
10	7.50 - 16	ST2	F1	10	810	205	22	30psi - 210kpa	30	870	5.5
11	6.50- 16	ST2	F1	10	770	180	20	33psi - 230kpa	30	635	4.5

Contact Us:

Email: twintrade@outlook.com

Phone: +34 613 962 860 (WhatsApp)

New Improved Compound Formula

Our product range includes tractor tires, truck tires, passenger car tires, and related automotive components. We provide reliable sourcing, flexible order quantities, and efficient logistics – all with a strong focus on customer satisfaction and long-term partnerships.



Tire Ply




Ground Contact
before adjustment



Ground Contact
after adjustment

Tire Structure / Carcass

Tire body built tough (with more plies than the competitors) and thick rubber under-tread to reduce punctures / explosions when getting impacted by foreign objects.

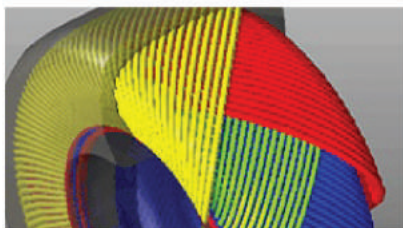

Tire Selection



Warranty / After-sale service

Please contact the sales representatives for the applied policy in your country.

Make-to-order

The company can make tires according to the customer specifications.

Domestic Market

In 1998, we had around 30 agencies in Ho Chi Minh city, West and Highlands. Nowadays, our products have been nationwide distributed by more than 200 official dealers in 63 provinces.

Northern



Central



South




International Market

TwinTrade serves clients across global markets with products that meet international quality and performance standards. Our commitment to reliability, competitive pricing, and efficient logistics makes us a trusted partner worldwide. We understand regional market needs and offer tailored solutions to support long-term business growth and customer satisfaction.



Global Markets Network

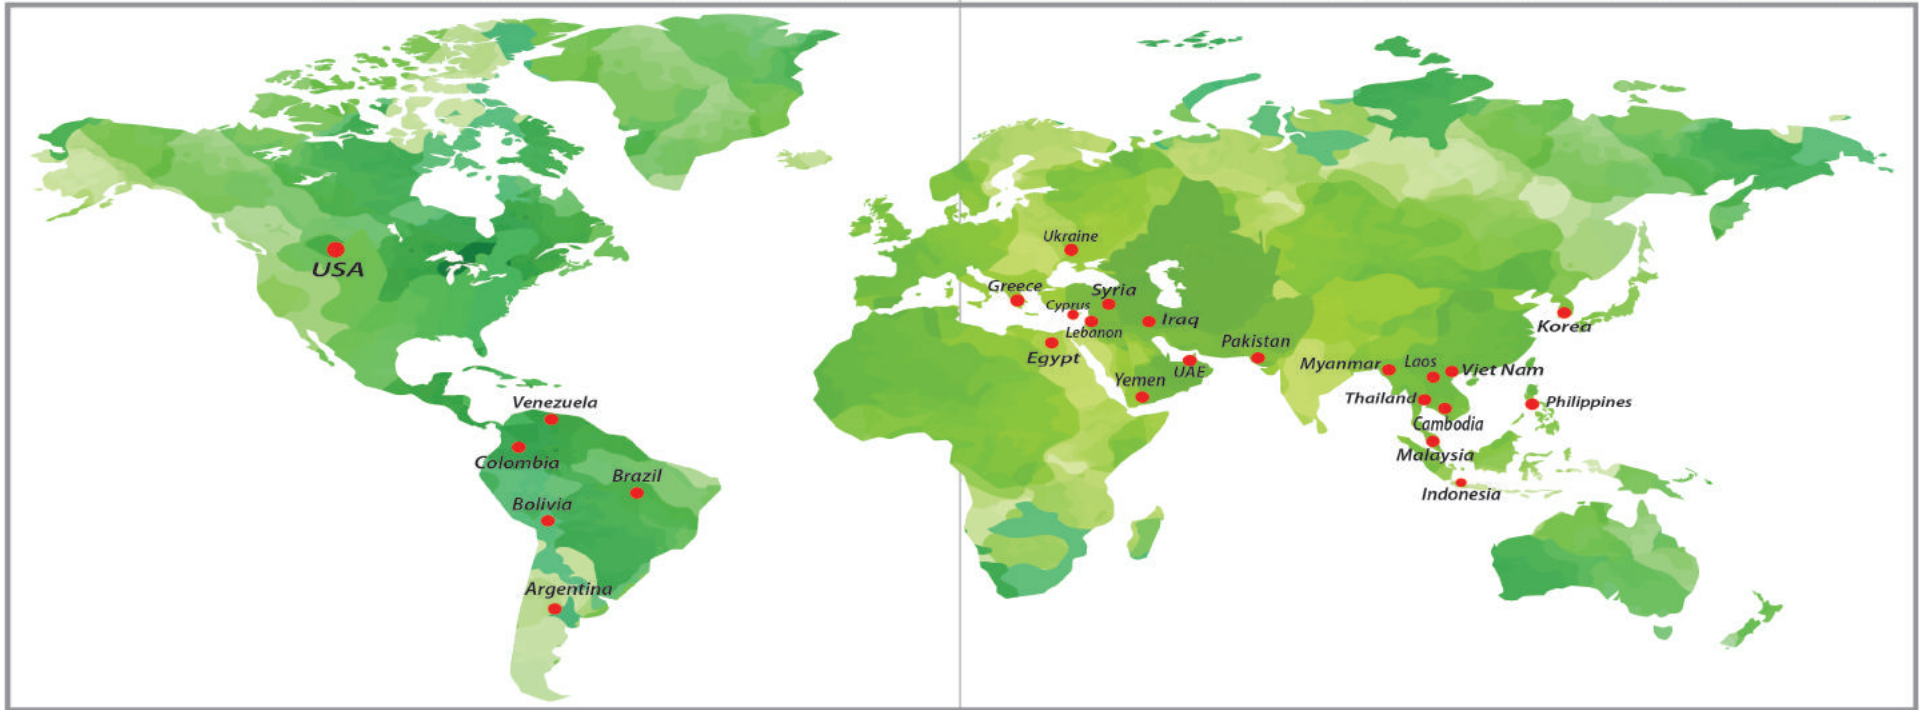

Contact Us:

Email: twintrade@outlook.com

Phone: +34 613 962 860 (WhatsApp)

Factory



Rubber Laboratory

Newly built in 2015 according to Japanese Standard (JIS) to help better quality control as well as to develop new compound formulas.



Warehouse

Newly built in 2016, with the storing capacity of up to 20,000 tires, in order to deliver to the customers in time.



Domestic Delivery



International Delivery



Contact Us:

Email: twintrade@outlook.com

Phone: +34 613 962 860 (WhatsApp)